II CLIPSAL



Double switched socket + USB charger, Clipsal Solis T Series, horizontal, USB C type, 10A, brushed brass

1025USBC-BB

Main

Product or component type	Switched socket with USB charger	
Assembly Type	Complete product	
Standards	AS/NZS 3112	
Product certifications	RCM	
Main colour tint	Brushed brass	

Complementary

Range	Clipsal Solis T Series	
Number Of Outlets	2	
Device mounting	Wall mounted 65 mm	
Cover type	With shutter	
Number of power socket outlets	2 x 2P + E, Australian/New Zealand	
Rated current	10 A 230/240 V, AC, 50 Hz	
Connections - terminals	4 x 2.5 mm² screw terminals 3 x 4 mm² screw terminals	
Colour tint	Brushed brass	
Surface finish	Aluminium	
surface treatment	Anodised	
Additional Function	USB type C	
Material	Aluminium	
Screwdriver shape	Philips No 2 Square drive no 1 (SQ1)	
Wire stripping length	16 mm	
Fixing mode	By screws	
fixing center	120 mm	
Height	74 mm	
Width	148 mm	
Depth	68.9 mm	
Sale per indivisible quantity	1	
Installation Type	Flush	
Installation Orientation	Horizontal	
control type	Rocker	

Cover Thickness	3.9 mm
Cut-out dimensions	130 x 50 mm
Number Of Switches	2

Environment

Ambient air temperature for operation	045 °C
Relative humidity	1095 %

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.5 cm
Package 1 Width	8 cm
Package 1 Length	8 cm
Package 1 Weight	252 g
Unit Type of Package 2	CAR
Number of Units in Package 2	30
Package 2 Height	32.5 cm
Package 2 Width	25 cm
Package 2 Length	41 cm
Package 2 Weight	7.94 kg



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

⊘ Environmental footprint	
Total lifecycle Carbon footprint	2
Environmental Disclosure	Product Environmental Profile

Use Better

EU RoHS Directive	Compliant
REACh Regulation	REACh Declaration


Use Again

○ Repack and remanufacture	
End of life manual availability	No need of specific recycling operations
Take-back	No

1025USBC-BB

Image of product / Alternate images

Alternative

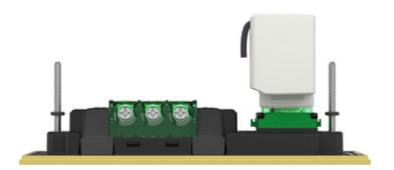




1025USBC-BB





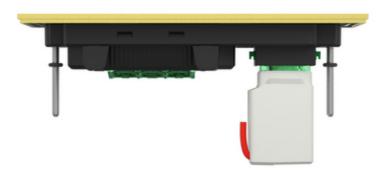



1025USBC-BB

