

IMPORTANT: IN THE INTEREST OF PRODUCT PERFORMANCE AND SAFETY PLEASE READ THESE INSTALLATION AND WARRANTY INSTRUCTIONS BEFORE INSTALLING THE PRODUCT.



SAL products are designed in accordance with all mandatory International and Australian Standards, which require installation by a qualified installer and regular cleaning and maintenance of the equipment. Products are sold in accordance with the following instructions and SAL standard terms and conditions of sale, which are available via www.sal.net.au.

PUSH BUTTON SMART SWITCH SWL350BT G2, product electrical and installation specification effective 15/04/2019.

Model No.	Input (V)/(Hz)	Min / Max loads	Colour	Dimension L x W x H (mm)	Wireless
SWL350BT G2	240/50	13*/350W	White	40 x 38 x 24	Bluetooth Mesh Technology







*Subject to product capability, this size load may require the inclusion of the LOAD capacitor included in the product carton.

Nominal frequency (Hz)	50	Product installation orientation	Horizontal wall mount
Operating ambient min/max (°C)	0 to 40	Product application	Interior residential or commercial
Operating humidity	10% to 85% RH, NC	Pixie connectivity	Yes
Storage ambient limit (°C)	0 to 40	IP rating*	20
Storage humidity	10% to 85% RH, NC	Attachment type - n/a	
IP rating for interior products: The designated IP rating is "from below the ceiling" unless otherwise specified.			
IP rating ALL products: Termination of the product must be made in accordance with the IP rating.			

MULTI-GANG DE-RATING (maximum 3 x gang configuration)

No. of switch	Resistive load (Incandescent lamp, High voltage halogen lamp)	Capacitive load (e.g. LED, CFL)	Inductive load (e.g. exhaust fan)
1	350W	200V AC	80V AC
2	280W	150V AC	60V AC
3	210W	100V AC	40V AC

LOAD COMPATIBILITY

Compatible Loads		
	Incandescent lamp	Yes
	240V halogen lamp	Yes
	Low voltage halogen with electronic transformer	Yes
	Low voltage halogen with magnetic transformer	Yes
	CFL	Yes
	LED fixture	Yes

General product application requirements (where applicable) :

- CCT selection (where supplied)** – IMPORTANT, where CCT colour temperature selection switching is provided, it is important to switch OFF the power before the CCT selection is made, otherwise equipment damage may occur.
- Recycling** – SAL encourages recycling, please consider the environment when disposing off packaging and components.
- Switching or test intervals** – For optimum product performance, good design practice does not encourage 24/7 operation of lighting products without the provision of a routine switching or regulatory test cycle. As a guide for continual operation installations, a twelve (12) hour duration for Industrial and Commercial applications and six (6) hour duration for Residential applications should be considered.
- Product maintenance** – In line with the relevant design standards and to protect your investment, it is important to have in place a routine cleaning program that reflects the installation environment and maintains the product in a clean and functional condition.

IMPORTANT - The supply must be isolated before any product maintenance or cleaning is conducted. In addition, damage to ANY cable or cord supplied with the product must be addressed as follows; For attachment type X having a specially prepared cable, if the external flexible cable is damaged, it must be replaced by an equivalent cable exclusively available from the manufacturer or authorised installer. For attachment type Y, if the external flexible cable is damaged, it must be exclusively replaced by an equivalent cable by the manufacturer or authorised installer. For attachment type Z, if the external flexible cable is damaged, the cable cannot be replaced and the luminaire must be destroyed.
- Adverse, corrosive and coastal installation applications** – Unless the product is specifically designated for such applications in these installation instructions, which is supported by a professional maintenance program; installation of equipment in such environments is not recommended.
- Dimming products** – Dimming circuits and product compatibility must be validated by the installer before installation; SAL cannot be responsible for third party changes in dimmer compatibility.
- Suspended products** – For installation safety, any suspended products must NOT be installed in high air movement spaces or locations subject to impact.
- Light source replacements** – (non-replaceable light sources) - The light source of the product is deemed not replaceable, when the product reaches its end of life, the complete product must be replaced by a qualified installer. (Non-user replaceable light sources) - The light source of the product must only be replaced by the manufacturer or qualified installer. **Caution, risk of electric shock.**
- Interior downlights and sensors with remote drivers** – The mounting facilities provided for the transformer/driver (if any), need only be utilized if in the application of the product is required by AS3000. Drivers are not designed for installation environments that restrict conventional airflow.
- Floodlight products** – Unless nominated aiming restrictions or installation parameters apply, products are designed for installation environments between ground and 15 metres in height, subject to the desired optical performance being achieved.

11. Specific installation procedures & feature: (if any)

Features:

- Fits most branded switch plates
- Over temperature protection
- Overload protection
- Short circuit protection
- Complies with Australian and New Zealand Standard: AS/NZS 60669.2.1
- Fits 1, 2, or 3 gang wall plates
- Smart functions via phone/tablet with the SAL PIXIE app
- LED indicator illuminates when switch is on, and faint when the switch is off, allowing you to identify the button in the dark
- LED indicator can be enabled and disabled through the PIXIE app.

Installation instructions:

1. Turn OFF the mains electricity supply before commencing installation
2. Check the load compatibility
3. Connect the switch according to wiring diagram
4. Turn ON the mains electricity supply, then check the switch operation by pressing the switch button

Operation instructions:


ON/OFF switch

- A quick tap of the button will turn the lights ON or OFF.
- Launch pairing mode: quickly press the button 4 x consecutive times
- Launch factory reset: achieved by quickly pressing the cap button 9 x times.

Scan QR code or go to App store (IOS) or Google Play (Android) to download the free PIXIE app to your smart phone. IOS: Requires IOS 6.0 or later. Compatible with iPhone, iPad and iPad touch Android: Requires Android 4.4 or above, devices must support Bluetooth 4.0




SWL350BT G2 - Standard wiring diagram

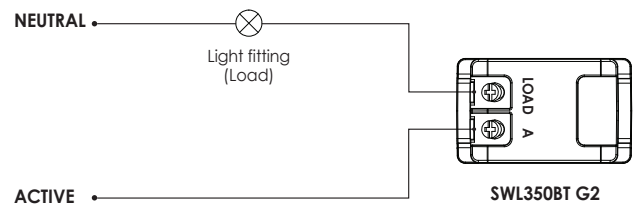

Complimentary load capacitor provided:

- The SWL350BT G2 is a 2 wire product, the capacitor provided in the carton operates as a load correction device to assist achieving minimum load levels and improve compatibility performances.

SWL350BT G2 - Optional wiring diagram

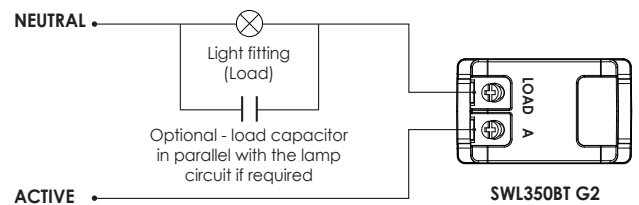

Specifications above are for reference only and may vary without prior notice

12. Warranty – In accordance with SAL standard terms and conditions of sale, SAL warrant this product to be free from defects in materials and or workmanship for a period as stated below for goods not subject to incorrect installation, maintenance, operation, mishandling, environmental, unauthorised modifications or electrical operating conditions outside the nominated product specification as detailed in these installation instructions. The benefits to you given by this warranty are in addition to other rights and remedies you have under law. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Warranty term – Twelve (12) months for commercial use and twenty four (24) months for residential use from date of purchase.

How to make a claim?

Step # 1 – Within 30 days of the fault discovery, please contact the original place of the SAL product purchase during standard (local) business hours, with the following information **(a)** proof of purchase **(b)** description and quantity of the claimed fault **(c)** address of installation. **(d)** operating hours of the product.

Step # 2 – It is then the responsibility of the original place of product purchase to report the matter to SAL aftersales;

NSW | ACT | QLD – SAL Nationwide Pty Ltd. 40 Biloela Street Villawood NSW 2163 | P: 02 9723 3099
VIC | TAS | SA | NT | WA – SAL Nationwide Pty Ltd. 46-48 Keys Road Moorabbin Victoria 3189 | P: 03 9532 3168

Step # 3 – Upon review of your claim and if the product is required to be returned to SAL for technical evaluation, then at the owners expense the product must be returned to SAL as per the above nominated locations.

Step # 4 – Pending the evaluation, the claim will be validated resulting in the product being repaired or replaced with the same or best equivalent product at the discretion of SAL, or rejected if the product fault was found to be caused by conditions beyond the responsibility of SAL warranty obligations. Consideration of installation, product removal, return freight and or testing fees are not the responsibility of SAL.