ROBUS®

SPEEDBEAM SLIM 4 WATTAGE SELECTABLE LED BATTEN, IP20, WHITE, CCT3 SELECTABLE 3000K/4000K/5700K

RSBSX06CCT3-01 RSBSX12CCT3-01

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician. Product or a person falling from height can cause serious personal injury. Please ensure to use suitable personal protective equipment's (PPE's), harness, ladders, or hoists fully complied with the relevant applicable health and safety requirements by (a) competent (person)s to perform the subjected tasks detailed in this instruction manual. The installation must be carried out by a qualified electrician.

Note:

Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site https://au.robus.com and www.robusled.co.nz

-20°C < Ta < +40°C, 220-240V ~ 50Hz, Class I, IP20

Luminaire is non-dimmable.

Installation

1. Ensure mains supply is switched off before commencing work.
2. Select suitable location for luminaire. Safety note! The power supply cable must not be exposed to mechanical damage.
3. Disassemble the fitting base from the fitting using the flat head screwdriver.

Besa box mounting:

4. Feed the supply power cable through the cable hole and attach the base of fitting onto the base box and fix the screws.

Wall mounting:

5. Mark appropriate fixing hole positions on the wall via using the base of fitting to attach onto the wall and check location of buried cables, pipes and other building services before drilling.
6. Drill holes on the wall and insert the wall plugs. And feed supply cables through cable entry hole, attach the base onto wall and fix it using the screws.
7. Connect power supply cable to terminal: Brwon to Live(L), Blue to Neutral(N) and Yellow/Green to Earth(E).
8. Select the colour temperature CCT (3000K, 4000K or 5700K) using DIP switch on the driver, and adjust the switch on the driver to select the wattage. Factory default setting: RSBSX06CCT3: 4000K, 20W, RSBSX12CCT3: 4000K, 38W. WARNING: DO NOT CHANGE WATTAGE and CCT WHEN THE FITTING IS ON!
9. Refit the optical assembly unit to the base and make sure the lock mechanism is in itself place.

Note: This luminaire has no user serviceable parts. If damaged, disconnect from mains and discontinue use.





The Installation must be carried out by a qualified electrician


LED Group Australia Pty Limited
Unit 3, 2 Pittwin Road
Capalaba
Queensland 4157
Australia

Tel: 07 3890 5444
Fax: 07 3890 4777
Email: purchasesau@robus.com
https://au.robus.com

Cuthbert Stewart Ltd
22 Fisher Crescent,
Mt Wellington, Auckland.
PO Box 62293, Sylvia Park 1644,
Auckland, New Zealand.


Ph: 0800 288 423
Customer Support:
support@csl-online.nz

Issue 1 231125

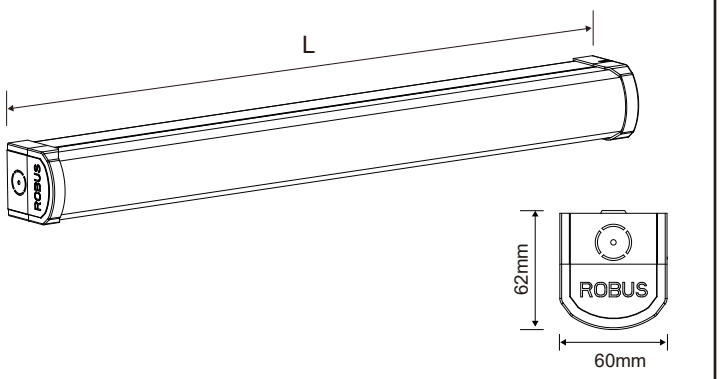


Items	Watts(W)	L(mm)	Weight
RSBSX06CCT3-01	11/14/17/20	0.57	0.52kg
RSBSX12CCT3-01	22/27/33/38	1.17	0.90kg


1

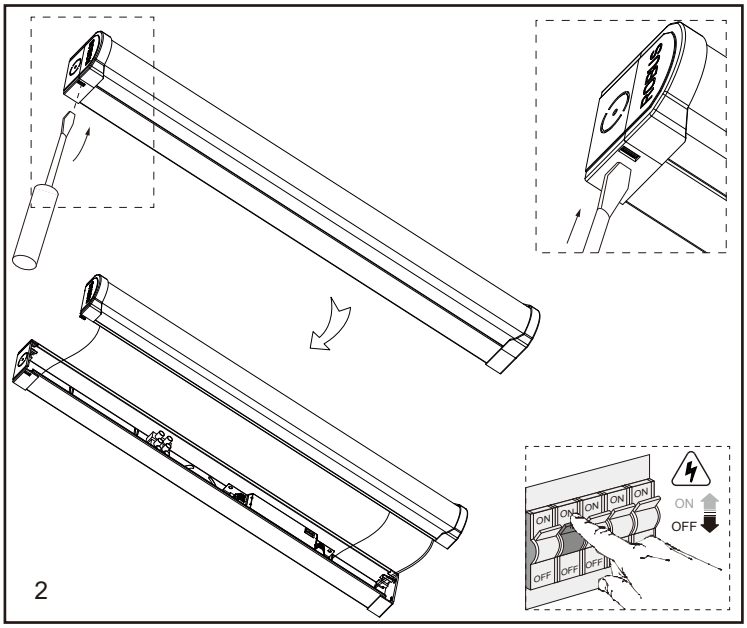


2

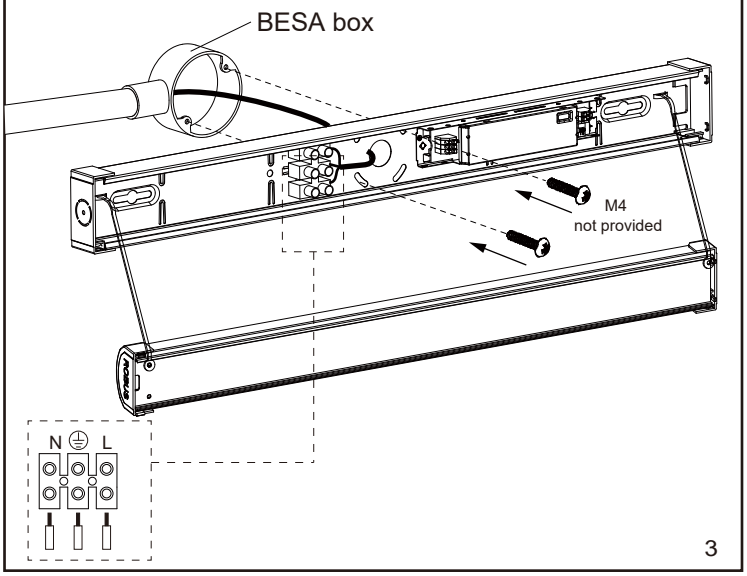

3

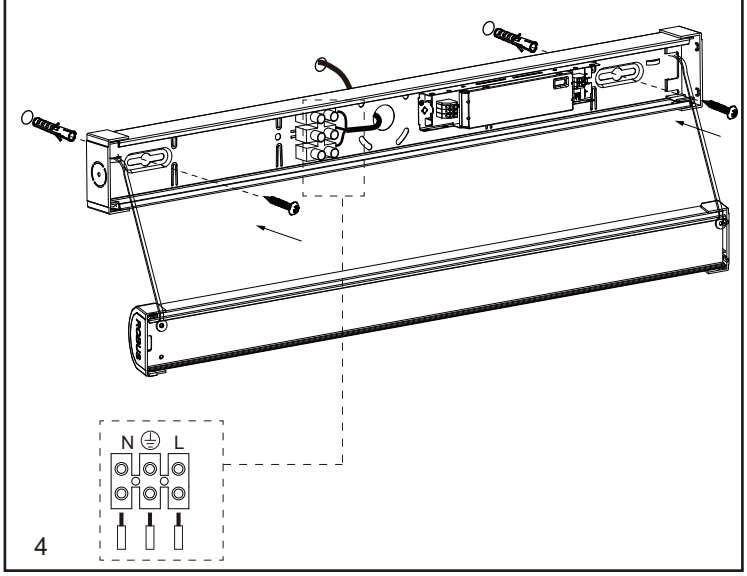

4

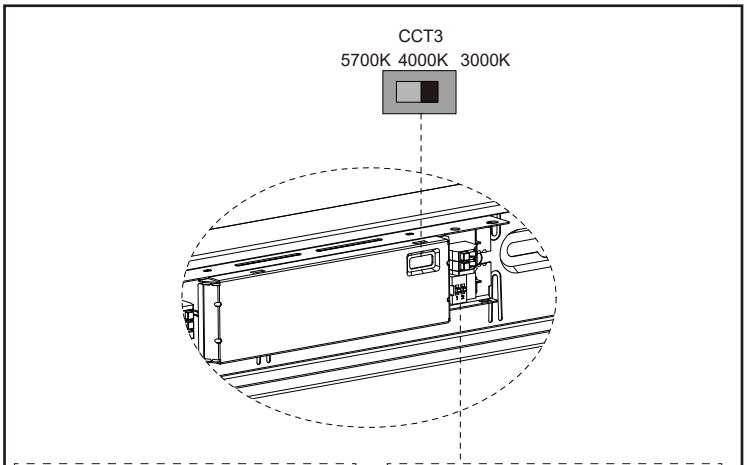

RSBSX06CCT3 DIP Switch wattage

ON
OFF
1 2


PIN1	PIN2	
ON	ON	**20W**
OFF	ON	17W
ON	OFF	14W
OFF	OFF	11W

RSBSX12CCT3 DIP Switch wattage

1 2

PIN1	PIN2	
ON	ON	**38W**
OFF	ON	33W
ON	OFF	27W
OFF	OFF	22W

5

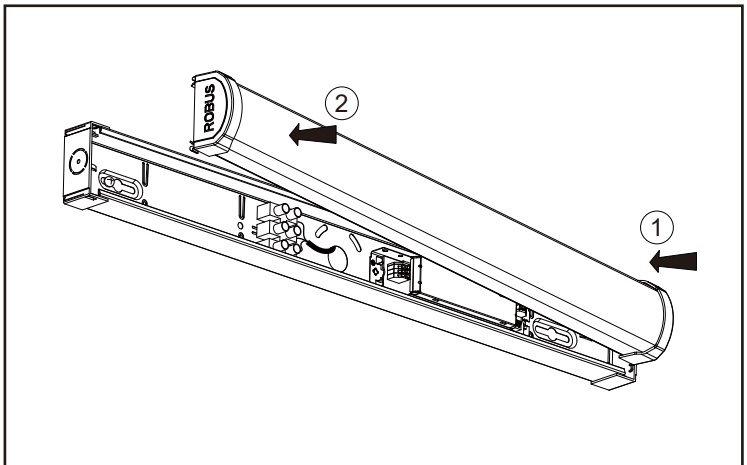

6

The Installation must be carried out by a qualified electrician

LED Group Australia Pty Limited
Unit 3, 2 Pittwin Road
Capalaba
Queensland 4157
Australia

Tel: 07 3890 5444
Fax: 07 3890 4777
Email: purchasesau@robus.com
https://au.robus.com

Cuthbert Stewart Ltd
22 Fisher Crescent,
Mt Wellington, Auckland.
PO Box 62293, Sylvia Park 1644,
Auckland, New Zealand.

Ph: 0800 288 423
Customer Support:
support@csl-online.nz