

**PUPP1G**  
**PUPP151G**  
**PUPP201G**  
**PUPPSW1G**  
**PUPPV1G**  
**PUPP1GL**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Single Power Points

- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm<sup>2</sup> cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Black also stocked - please check availability.
- Switches approved to AS/NZS3133.
- Power points approved to AS/NZS3112.
- Typical example of size seen below:

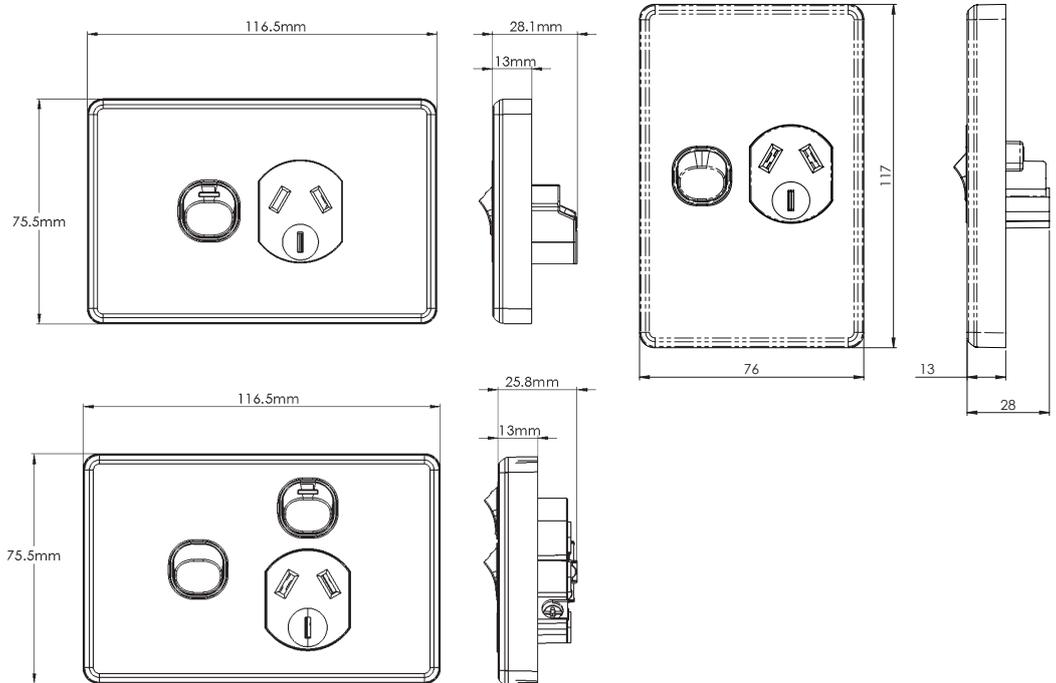

| Catalogue Number | Description  |
|------------------|--|
| PUPP1G           | Power Point Switched 1 Gang 10A 250V~                                |
| PUPP151G         | Power Point Switched 1 Gang 15A 250V~                                |
| PUPP201G         | Power Point Switched 1 Gang 20A 250V~                                |
| PUPPSW1G         | Power Point Switched 1 Gang 10A 250V~<br>With Extra Switch, 10AX/16A |
| PUPPV1G          | Power Point Switched Vertical 1 Gang 10A 250V~                       |
| PUPP1GL          | Power Point Switched 1 Gang 10A 250V~ with Lighting Pin              |

When ordering BLACK product add "BK" at end of catalogue number, ie PUPP1GBK

When ordering BRUSHED ALUMINIUM (cover) add "CBA" at end of catalogue number, ie PUPP1GCBA

When ordering REPLACEMENT "COVERS ONLY" add "CO" at end of catalogue number, ie PUPP1GCO

**Certification Number:**

PUPP1G: GMA-509981-EA  
 PUPP151G: GMA-509981-EA  
 PUPPSW1G: GMA-501109-EA  
 PUPPV1G: GMA-501807-EA

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
 P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au  
[www.gsme.com.au](http://www.gsme.com.au)



**PUPP1GAU  
PUPP1GAUBK**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.



Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Single Power Points (Auto Switched)

- Uses brass terminals that have the screws backed out for easier installation of cabling. Power point terminals have Square wrapped terminals to suit 4 x 2.5mm<sup>2</sup> cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Black also stocked - please check availability.
- Power points approved to AS/NZS3112.
- Active is auto switched.
- Shuttered.
- Typical example of size seen below:

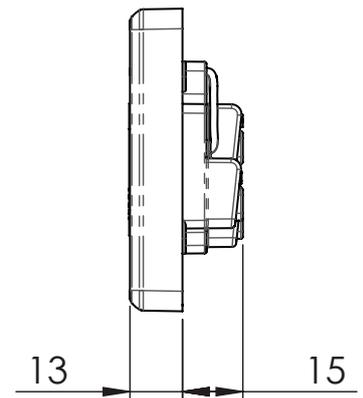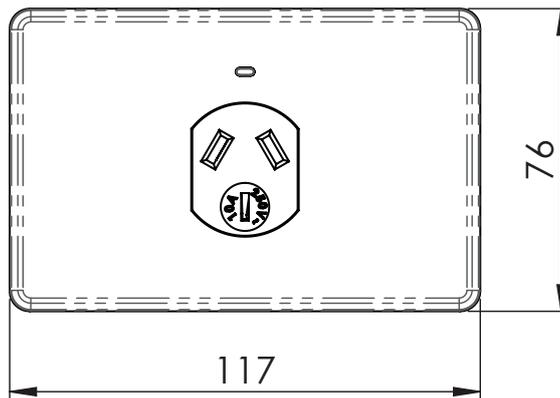

| Catalogue Number | Description                                      |
|------------------|--|
| PUPP2GAU         | Power Point Auto Switched 1 Gang 10A 250V~       |
| PUPP2GAUBK       | Power Point Auto Switched 1 Gang 10A 250V~ Black |

**Certification Number:**  
GMA-511520-EA

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au  
[www.gsm.com.au](http://www.gsm.com.au)



## PUS0321G

\*See current catalogue for further detail

### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Single Power Points (Unswitched)

- Uses brass terminals that have the screws backed out for easier installation of cabling. Terminals suit 6mm<sup>2</sup> cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white.
- Puma unswitched wall socket compliant to AS/NZS3112.
- 32A 250V ac rating
- NOTE: this is not an auto switched socket so must be linked to a control switch.
- Designed for use and linking for control with TRADER large capacity switches such as the MESW32 or PUSWDPV45 series where connection to small appliances is required.
- Typical example of size seen below:

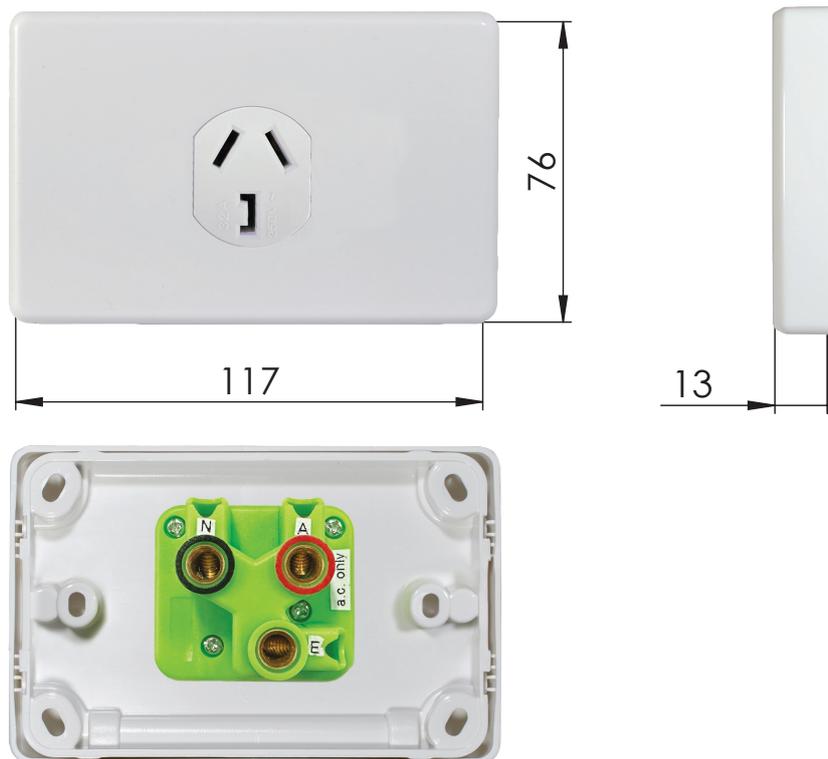

| Catalogue Number | Description                             |
|------------------|---|
| PUS0321G         | Socket Unswitched 1 Gang 32A 250V White |

### Certification Number:

TBC

### GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au

[www.gsm.com.au](http://www.gsm.com.au)



Data Specification Sheet  
August 2024

**PUPP2G**  
**PUPP152G**  
**PUPPSW2G**  
**PUPPV2G**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Double Power Points

- Switches approved to AS/NZS3133
- Power points approved to AS/NZS3112
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm<sup>2</sup> cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Black also stocked - please check availability.
- Typical example of size seen below:

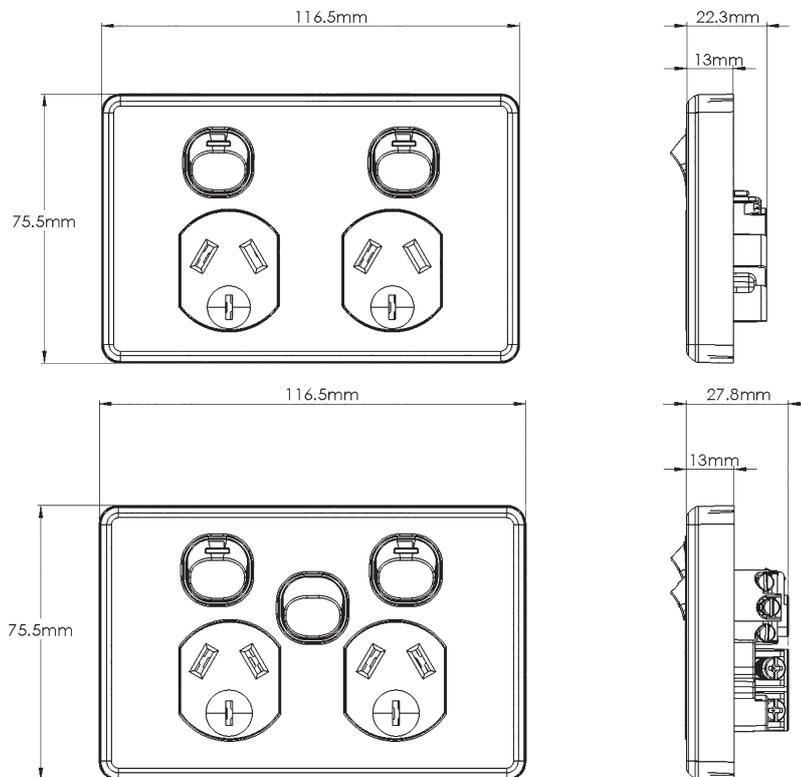

| Catalogue Number | Description  |
|------------------|--|
| PUPP2G           | Power Point Switched 2 Gang 10A 250V~                            |
| PUPP152G         | Power Point Switched 2 Gang 15A 250V~                            |
| PUPPSW2G         | Power Point Switched 2 Gang 10A 250V~ With Extra Switch 10AX/16A |
| PUPPV2G          | Power Point Switched Vertical 2 Gang, 10A 250V~                  |

When ordering BLACK product add "BK" at end of catalogue number, ie PUPP2GBK

When ordering BRUSHED ALUMINIUM (cover) add "CBA" at end of catalogue number, ie PUPP2GCBA

When ordering REPLACEMENT "COVERS ONLY" add "CO" at end of catalogue number, ie PUPP2GCO

**Certification Number:**

PUPP2G: GMA-508660-EA  
PUPP152G: GMA-500830-EA  
PUPPSW2G: GMA-501260-EA  
PUPPV2G: GMA-501806-EA

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au  
[www.gsm.com.au](http://www.gsm.com.au)



## PUPP2GEF

\*See current catalogue for further detail



### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.



Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Double Power Points

- Switches approved to AS/NZS3133
- Power points approved to AS/NZS3112
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm<sup>2</sup> cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white.
- Easy Fit Bracketless Mounting with springs.
- Typical example of size seen below:

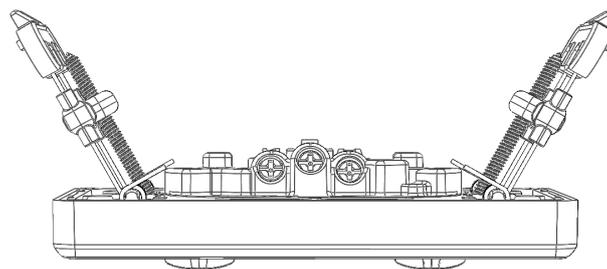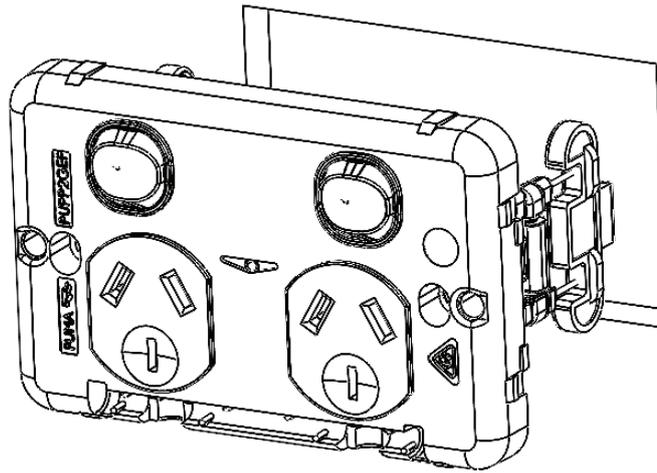

| Catalogue Number | Description  |
|------------------|--|
| PUPP2GEF         | Power Point Switched 2 Gang 10A 250V Easy Fit Bracketless Mounting |

**Certification Number:**  
GMA-508660-EA

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@g sme.com.au  
[www.g sme.com.au](http://www.g sme.com.au)



Data Specification Sheet  
November 2024

**PUPP2GAU  
PUPP2GAUBK**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.



Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Double Power Points (Auto Switched)

- Uses brass terminals that have the screws backed out for easier installation of cabling. Power point terminals have Square wrapped terminals to suit 4 x 2.5mm<sup>2</sup> cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Black also stocked - please check availability.
- Power points approved to AS/NZS3112.
- Active is auto switched.
- Shuttered.
- Typical example of size seen below:

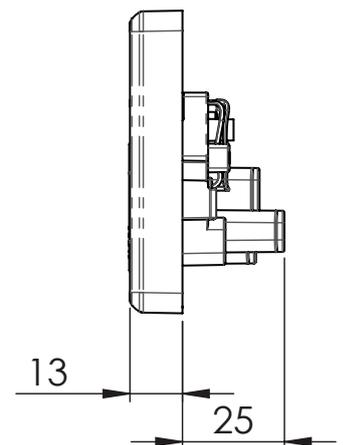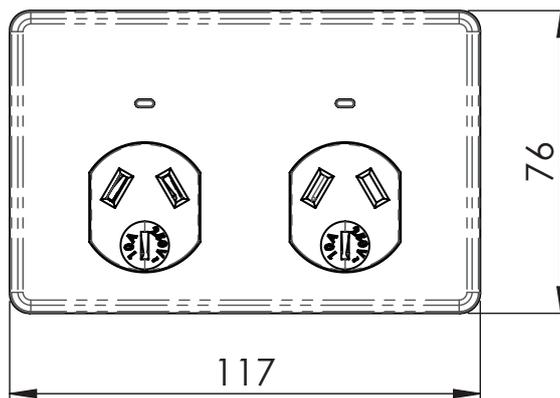

| Catalogue Number | Description                                      |
|------------------|--|
| PUPP2GAU         | Power Point Auto Switched 2 Gang 10A 250V~       |
| PUPP2GAUBK       | Power Point Auto Switched 2 Gang 10A 250V~ Black |

**Certification Number:**  
GMA-511521-EA

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au  
[www.gsm.com.au](http://www.gsm.com.au)



**Vertical Switches**

- PUSWV1G**
- PUSWV2G**
- PUSWV3G**
- PUSWV4G**
- PUSWV5G**
- PUSWV6G**

**Horizontal Switches**

- PUSW1G**
- PUSW2G**
- PUSW3G**
- PUSW4G**
- PUSW5G**
- PUSW6G**

**Switch Plates (Less Mechs)**

- PUSWPV1G**
- PUSWPV2G**
- PUSWPV3G**
- PUSWPV4G**
- PUSWPV5G**
- PUSWPV6G**
- PUSWPVXG**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Switch Plates

- Switches are rated 10AX/16A 250V~ and approved to AS/NZS3133
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm<sup>2</sup> cabling with 4.1 bore.
- Slotted head screws for the terminals.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Black also stocked - please check availability.
- Plates suit Trader Meerkat MESW mechs, including TV and Data; and Clipsal 30 Style\* mechs and accessories
- Typical example of size seen below:

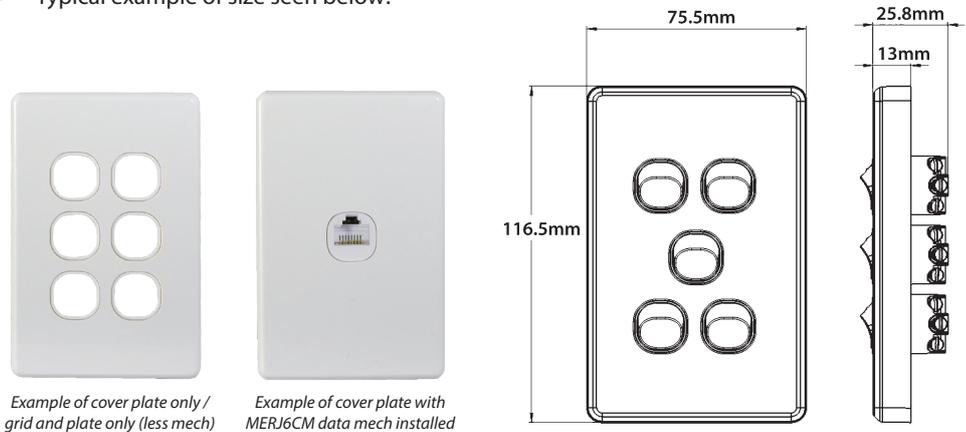

| Catalogue No. | Description                              |
|---------------|--|
| PUSWV1G       | Switch Vertical 1 Gang, 10AX/16A 250V~   |
| PUSWV2G       | Switch Vertical 2 Gang, 10AX/16A 250V~   |
| PUSWV3G       | Switch Vertical 3 Gang, 10AX/16A 250V~   |
| PUSWV4G       | Switch Vertical 4 Gang, 10AX/16A 250V~   |
| PUSWV5G       | Switch Vertical 5 Gang, 10AX/16A 250V~   |
| PUSWV6G       | Switch Vertical 6 Gang, 10AX/16A 250V~   |
| PUSW1G        | Switch Horizontal 1 Gang, 10AX/16A 250V~ |
| PUSW2G        | Switch Horizontal 2 Gang, 10AX/16A 250V~ |
| PUSW3G        | Switch Horizontal 3 Gang, 10AX/16A 250V~ |
| PUSW4G        | Switch Horizontal 4 Gang, 10AX/16A 250V~ |
| PUSW5G        | Switch Horizontal 5 Gang, 10AX/16A 250V~ |
| PUSW6G        | Switch Horizontal 6 Gang, 10AX/16A 250V~ |

| Catalogue No. | Description                              |
|---------------|--|
| PUSWPV1G      | Switch Plate Vertical 1 Gang (Less Mech) |
| PUSWPV2G      | Switch Plate Vertical 2 Gang (Less Mech) |
| PUSWPV3G      | Switch Plate Vertical 3 Gang (Less Mech) |
| PUSWPV4G      | Switch Plate Vertical 4 Gang (Less Mech) |
| PUSWPV5G      | Switch Plate Vertical 5 Gang (Less Mech) |
| PUSWPV6G      | Switch Plate Vertical 6 Gang (Less Mech) |
| PUSWPVXG      | Blank plate with clip on surround        |

The above catalogue numbers where "P" appears in number, refers to Cover Plate Only / Grid and Plate only (less mech)

\*The Clipsal brand and associated products are Trademarks of Schneider Electric (Australia) Pty Ltd.

GSM Electrical (Australia) Pty Ltd, the TRADER brand and it's products, have no endorsement or affiliation with Schneider Electric Pty Ltd.

Horizontals available by request

When ordering BLACK product add "BK" at end of catalogue number, ie PUSWV1GBK

When ordering BRUSHED ALUMINIUM (cover) add "CBA" at end of catalogue number, ie PUSWV1GCBA

When ordering REPLACEMENT "COVERS ONLY" add "CO" at end of catalogue number, ie PUSWPV1GCO



**MEERKAT Switch Mechanisms** are used for all switch plates. Please refer to Meerkat Mech Matrix for range compatibility.

Certification Number: GMA-508434-EA

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

[www.gsme.com.au](http://www.gsme.com.au)



**PUPP1GCBA**  
**PUPP2GCBA**  
**PUPP2USB2GCBA**  
**PUPPSW1GCBA**  
**PUPPSW2GCBA**  
**PUSWDPOV45CBA**  
**PUSWPV1GCBA**  
**PUSWPV2GCBA**  
**PUSWPV3GCBA**  
**PUSWPV4GCBA**  
**PUSWPV5GCBA**  
**PUSWPV6GCBA**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Switch & Power Point Brushed Aluminium Covers

- Brushed Aluminium covers provide a great protective upgrade to switches and power points and do not fingerprint as much as other materials while providing a similar look.
- The brushed finish is complemented with the décor of other brushed stainless appliances or looks stylish on other backgrounds.

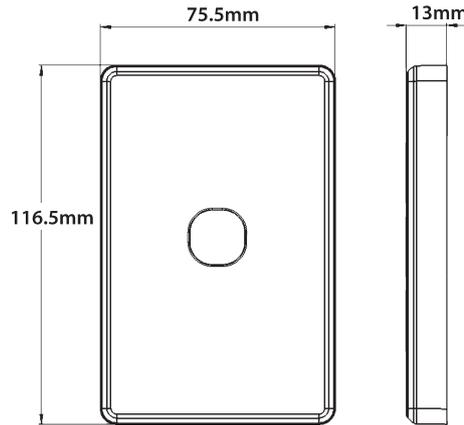

Example of cover plate  
PUPPSW1GCBA



Example of cover plate with  
PUPPSW1GCBA with PUPPSW1G



Example of cover plate with  
PUPPSW1GCBA with PUPPSW1G

| Catalogue Number | Description   |
|------------------|---|
| PUPP1GCBA        | Power Point Switched 1 Gang, Cover Brushed Aluminium                  |
| PUPP2GCBA        | Power Point Switched 2 Gang, Cover Brushed Aluminium                  |
| PUPPSW1GCBA      | Power Point Switched 1 Gang With Extra Switch Cover Brushed Aluminium |
| PUPPSW2GCBA      | Power Point Switched 2 Gang With Extra Switch Cover Brushed Aluminium |
| PUSWPV1GCBA      | Switch Plate Vertical 1 Gang Cover Brushed Aluminium                  |
| PUSWPV2GCBA      | Switch Plate Vertical 2 Gang Cover Brushed Aluminium                  |
| PUSWPV3GCBA      | Switch Plate Vertical 3 Gang Cover Brushed Aluminium                  |
| PUSWPV4GCBA      | Switch Plate Vertical 4 Gang Cover Brushed Aluminium                  |
| PUSWPV5GCBA      | Switch Plate Vertical 5 Gang Cover Brushed Aluminium                  |
| PUSWPV6GCBA      | Switch Plate Vertical 6 Gang Cover Brushed Aluminium                  |
| PUSWDPOV45CBA    | Switch Oven Double Pole Cover Brushed Aluminium                       |



**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au

[www.gsm.com.au](http://www.gsm.com.au)

Data Specification Sheet  
February 2022

## PUSWV3GLFH

### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.


## Puma FAN, LIGHT, HEAT Switch Plate

The Puma PUSWV3GLFH is the stylish 3 Gang Switch Plate that has mechanisms labelled with LIGHT, FAN, HEAT, text.

It is the ideal product to control LIGHT/FAN/HEAT 3IN1 bathroom units (2 lamp version).

Features:

- Switches are rated 10AX/16A 250V~ and approved to AS/NZS3133.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm<sup>2</sup> cabling with 4.1 bore.
- Slotted head screws for the terminals.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Mechs labelled as LIGHT, FAN, HEAT, to be used in conjunction with 3IN1 fan/light/heater
- Standard colour is White.
- Typical example of size seen below:

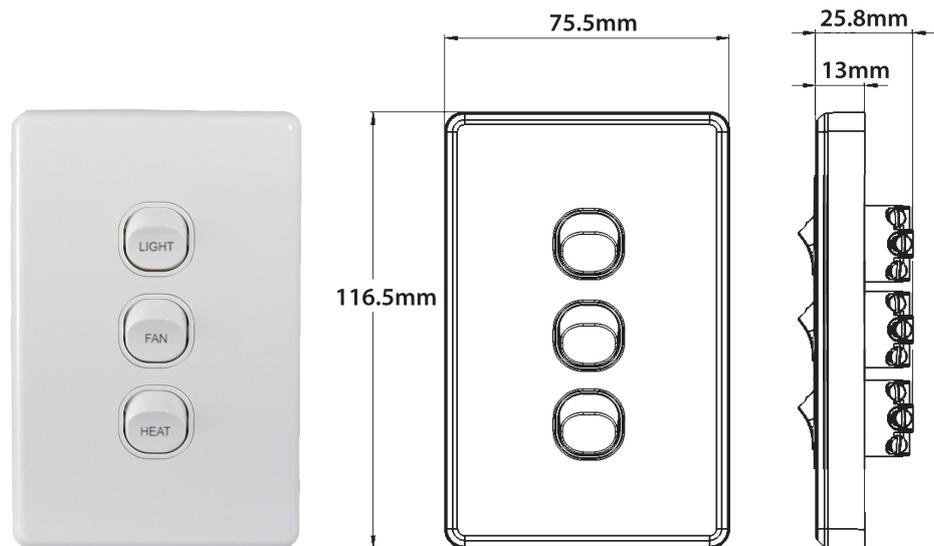

| Catalogue Number | Description  |
|------------------|--|
| PUSWV3GLFH       | Switch Vertical 3 Gang 10AX/16A 250V~<br>(Mechs Labelled LIGHT FAN HEAT) |

**Certification Number:** TBC

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet  
June 2022



## PUSWV4GFLHH

### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.




## Puma FAN, LIGHT, HEAT Switch Plate

The Puma PUSWV4GFLHH is the stylish 4 Gang Switch Plate that has mechanisms labelled with FAN, LIGHT, HEAT, HEAT text.

It is the ideal product to control FAN/LIGHT/HEAT 3IN1 bathroom units.

Features:

- Switches are rated 10AX/16A 250V~ and approved to AS/NZS3133
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm<sup>2</sup> cabling with 4.1 bore.
- Slotted head screws for the terminals.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Mechs labelled as FAN, LIGHT, HEAT, HEAT to be used in conjunction with 3IN1 fan/light/heater
- Standard colour is White.
- Typical example of size seen below:

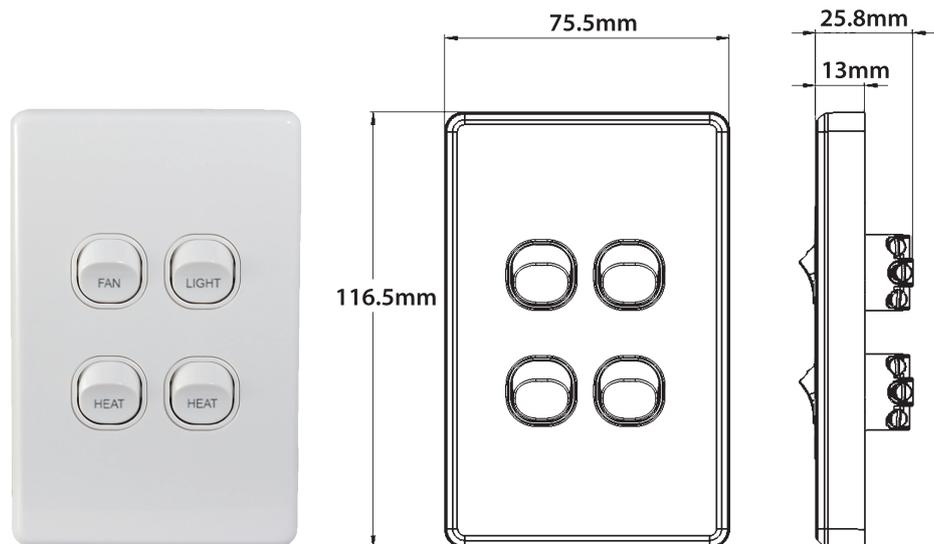

| Catalogue Number | Description  |
|------------------|--|
| PUSWV4GFLHH      | Switch Vertical 4 Gang 10AX/16A 250V~<br>(Mechs Labelled FAN, LIGHT, HEAT, HEAT) |

**Certification Number:** TBC

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au

[www.gsm.com.au](http://www.gsm.com.au)



**PUSWDPOV45**  
**PUSWDPOV45H**  
**PUSWDPOV45BK**  
**PUSWDPOV45BKH**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Oven Switches

- Switch approved to AS/NZS60669.1
- 45A 250V~, Double Pole
- Terminal bore 6.5mm diameter suits 16mm<sup>2</sup> cable
- Cover, plate and dolly is made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Also available in black.

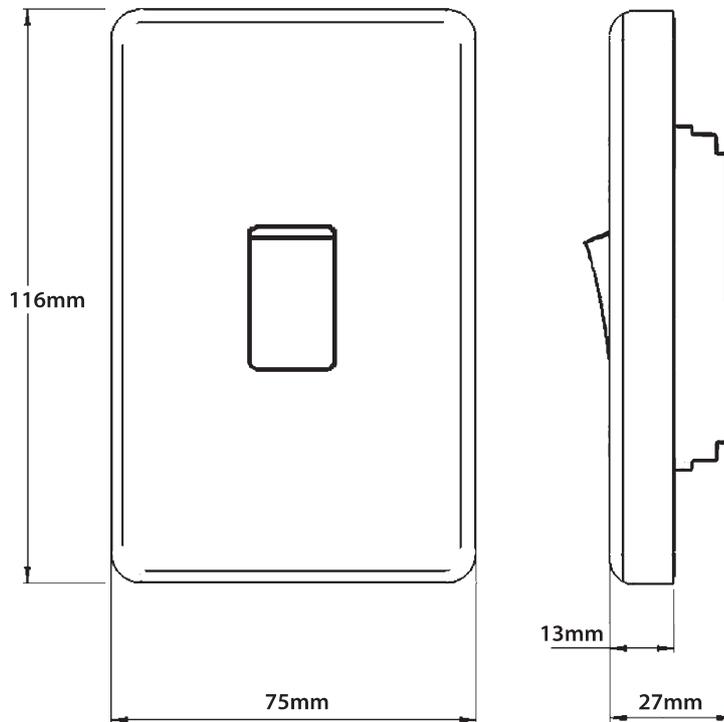

| Catalogue Number | Description  |
|------------------|--|
| PUSWDPOV45       | Switch Oven, 45A 250V~ Double Pole                     |
| PUSWDPOV45H      | Switch Oven, 45A 250V~ Double Pole - Horizontal        |
| PUSWDPOV45BK     | Switch Oven, 45A 250V~ Double Pole, Black              |
| PUSWDPOV45BKH    | Switch Oven, 45A 250V~ Double Pole, Black - Horizontal |

**Certification Number:**  
PUSWDPOV45 / PUSWDPOV45H: GMA-502679

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au  
[www.gsm.com.au](http://www.gsm.com.au)



**PUSWV6GKT4  
PUSWKT**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



**Puma/Puma Vandalproof Switch Key Tag**

- Hospitality/Occupancy key tag access switch plate.
- Rated 16A/10AX per switch mechanism (4 in plate).
- 2 additional blank apertures for retrofitting additional switches or neon indicators where necessary.
- Ideal for use in hotels, site building access and other areas where the use of facilities needs to be controlled.
- 84mm mounting.
- Developed in the robust Puma Vandal proof series.
- Wall plate Overall height 24mm or 33mm with key inserted.
- Requires 120mm below the wall plate to allow the key to be inserted.

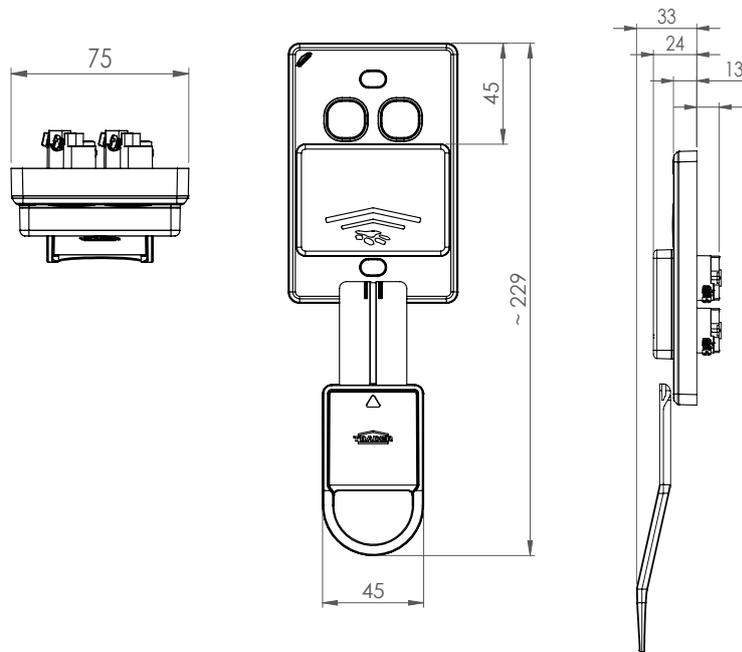

| Catalogue Number | Description   |
|------------------|---|
| PUSWV6GKT4       | Switch Key Tag Vertical 6 Gang Grid With 4 10AX/16A 250V~ Switches and 2 Blank Plugs With Non Removeable Cover Vandal Proof |
| PUSWKT           | Key Tag Only to Suit PUSWV6GKT4 Key Tag Switch  |

**Certification Number:**  
GMA-508434-EA

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au  
[www.gsm.com.au](http://www.gsm.com.au)



**Vertical Switches**

- PUSWV1G66**
- PUSWV2G66**
- PUSWV3G66**
- PUSWV4G66**
- PUSWV4G66FLHH**

**Horizontal Switches**

- PUSW1G66**
- PUSW2G66**
- PUSW3G66**
- PUSW4G66**
- PUSW4G66FLHH**

\*See current catalogue for further detail



**Warning:**

Must be installed by a licensed electrician and installed in accordance with requirements of AS/NZS3000.

Caution no user serviceable parts contained, risk of electric shock if dismantled. Cutting cables or damaging components will void warranty.

Check whether the product has been damaged in transport. Do not operate or install any product which appears damaged in any way. Return the complete product to place of purchase for inspection or replacement.

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.

## Puma Range of IP66 Switch Plates

- Trader IP66 rated flush switches have been designed to achieve IP66 on a smooth, flat, non-porous surface, from the front of the switch only.
- The switches are compatible with mounting hardware for standard 84mm mounting centre wallplates.
- IP Rating : IP66 (from front only).
- Voltage Rating: 250V a.c
- Current Rating: 10AX.
- Motor Rating: M100
- No provision has been made to prevent water and dust entering from behind the switch.
- Care should be taken when mounting, to ensure that water and dust cannot bypass the gasket and come in contact with live parts.
- Ensure that the mounting surface is completely flat, smooth and non-porous.
- Make sure the rear gasket seal is located in its correct position. – Use the silicone washer.
- Clip on front cover/surround.
- Standard colour is white. PUSWV4G66 & PUSW4G66 also available in Black & Matt Black - please check availability.

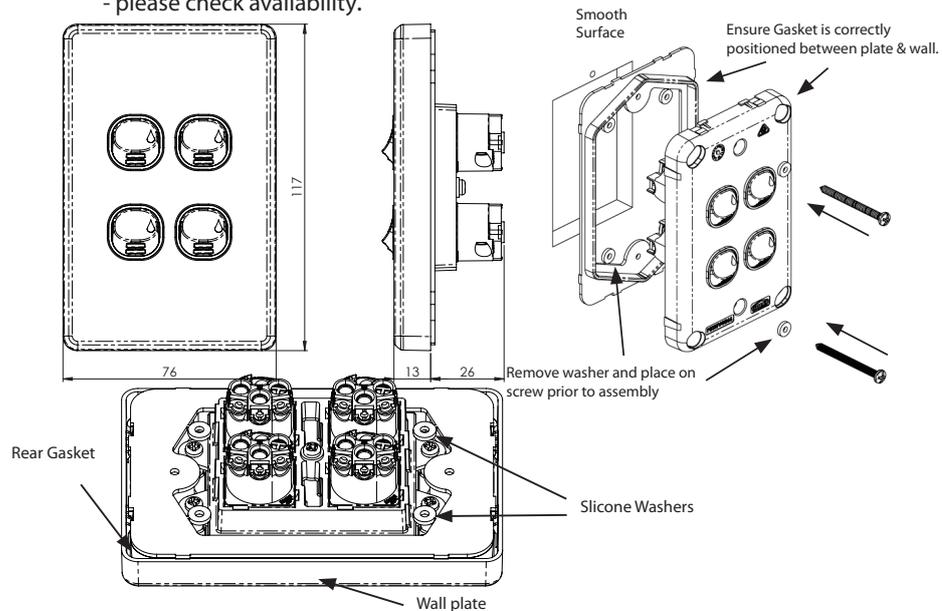

| Catalogue No. | Description   |
|---------------|---|
| PUSWV1G66     | Switch Vertical 1 Gang 10AX 250V~ IP66                                |
| PUSWV2G66     | Switch Vertical 2 Gang 10AX 250V~ IP66                                |
| PUSWV3G66     | Switch Vertical 3 Gang 10AX 250V~ IP66                                |
| PUSWV4G66     | Switch Vertical 4 Gang 10AX 250V~ IP66                                |
| PUSWV4G66FLHH | Switch Vertical 4 Gang 10AX 250V~ IP66, printed FAN LIGHT HEAT HEAT   |
| PUSW1G66      | Switch Horizontal 1 Gang 10AX 250V~ IP66                              |
| PUSW2G66      | Switch Horizontal 2 Gang 10AX 250V~ IP66                              |
| PUSW3G66      | Switch Horizontal 3 Gang 10AX 250V~ IP66                              |
| PUSW4G66      | Switch Horizontal 4 Gang 10AX 250V~ IP66                              |
| PUSW4G66FLHH  | Switch Horizontal 4 Gang 10AX 250V~ IP66, printed FAN LIGHT HEAT HEAT |

When ordering BLACK product add "BK" at end of catalogue number, ie PUSWV4G66BK

When ordering MATT BLACK product add "MBK" at end of catalogue number, ie PUSWV4G66MBK

**Certification Number:** GMA-508434-EA

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

[www.gsme.com.au](http://www.gsme.com.au)



**PUSWVA1G**  
**PUSWVA2G**  
**PUSWVA3G**  
**PUSWVA4G**

\*See current catalogue for further detail

**Page 1 of 2**

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Architrave Switches

- Switches are rated 10AX/16A 250V~
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm<sup>2</sup> cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white.
- Approved to AS/NZS3133
- Typical example of size seen below:

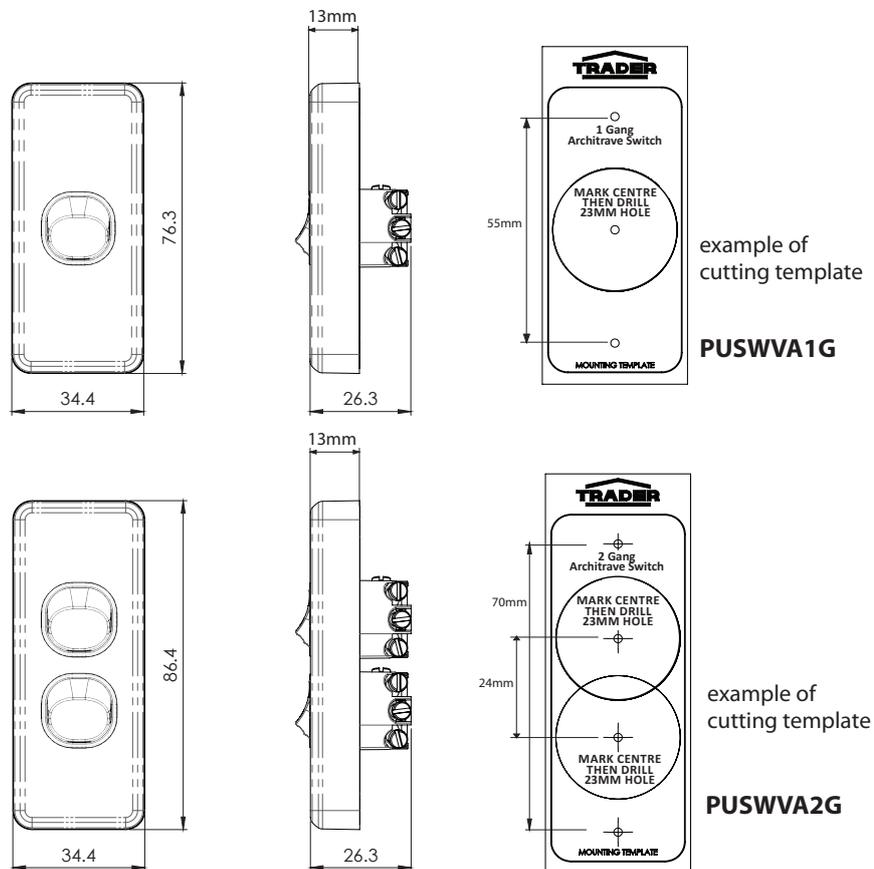

| Catalogue Number | Description                                       |
|------------------|---|
| PUSWVA1G         | Switch Vertical Architrave 1 Gang, 10AX/16A 250V~ |
| PUSWVA2G         | Switch Vertical Architrave 2 Gang, 10AX/16A 250V~ |
| PUSWVA3G         | Switch Vertical Architrave 3 Gang, 10AX/16A 250V~ |
| PUSWVA24         | Switch Vertical Architrave 4 Gang, 10AX/16A 250V~ |



**MEERKAT Switch Mechanisms** are used for all switch plates. Please refer to **Meerkat Mech Matrix** for range compatibility.

**Certification Number:** GMA-508434-EA

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@g sme.com.au  
[www.g sme.com.au](http://www.g sme.com.au)



Data Specification Sheet  
February 2022

**PUSWVA1G**  
**PUSWVA2G**  
**PUSWVA3G**  
**PUSWVA4G**

\*See current catalogue for further detail

**Page 2 of 2**

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



**Puma Range of Architrave Switches**

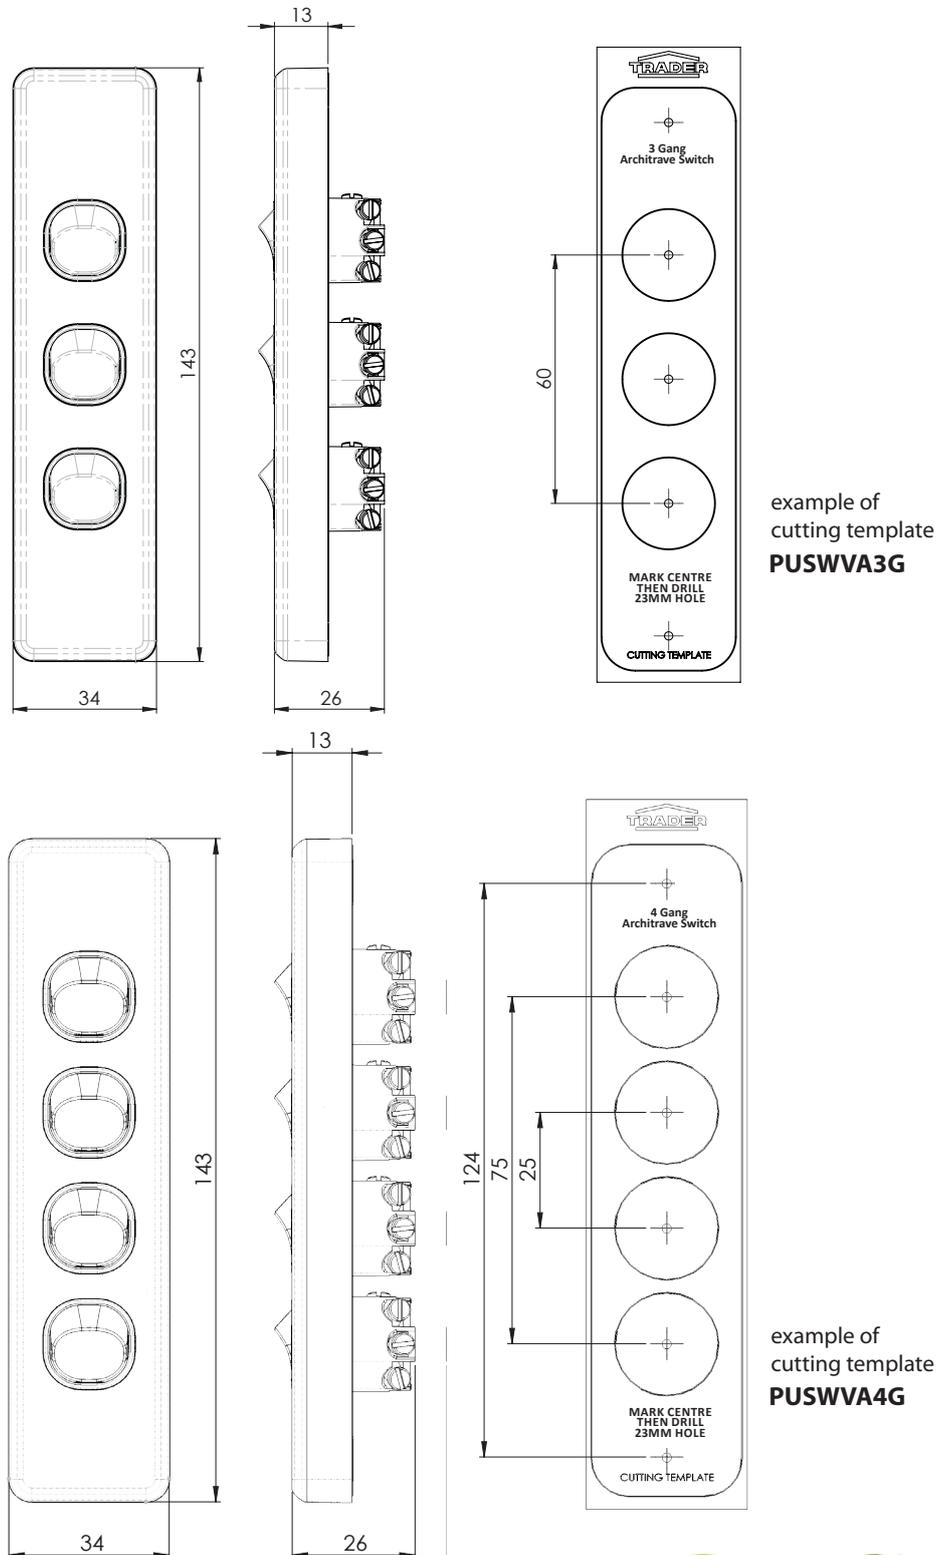

example of cutting template  
**PUSWVA3G**

example of cutting template  
**PUSWVA4G**

**Certification Number:** GMA-508434-EA

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

[www.gsme.com.au](http://www.gsme.com.au)



**PUBIG4**  
**PUBIG5**  
**PUBIG4BK**  
**PUBIG5BK**  
**PUBIG4MW**  
**PUBIG5MW**  
**PUBIG4MBK**  
**PUBIG5MBK**

**PUBIG4MB & PUBIG5MB**  
**Mounting Blocks**  
**are used in conjunction**  
**with PUBIG4 and PUBIG5**  
**PUBIG4CA & PUBIG5CA**  
**(Aluminium Covers)**  
**are also available**  
**(See separate Data Sheet)**

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma BIG4 and BIG5 Fixed Power Points


**PUBIG4 and PUBIG5**  
**DOUBLE POLE**

**PUBIG4**

- Double pole surface mounted switched Quad power point.
- 10A at 250V~
- Diameter 6mm terminal bores to suit 4 x 2.5 mm<sup>2</sup> cables. 6mm terminal bore.
- Fits 84 mm mounting centres.
- Dolly indicator colour orange.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Colour: White / Black / Matt White / Matt Black also stocked - **please check availability.**
- Approved to AS/NZS3112.

**PUBIG5**

- Double pole surface mounted switched Five gang power point.
- 10A at 250V~
- Diameter 6mm terminal bores to suit 4 x 2.5 mm<sup>2</sup> cables. 6mm terminal bore.
- Fits 84 mm mounting centres.
- Dolly indicator colour orange.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Colour: White.
- Mounting blocks include backing plates for situations where fully enclosed insulation is required.
- Colour: White / Black / Matt White / Matt Black also stocked - **please check availability.**
- Approved to AS/NZS3112.
- **The BIG5 uses the same features and mounting system as the BIG4, but has the additional switched power point for convenience.**

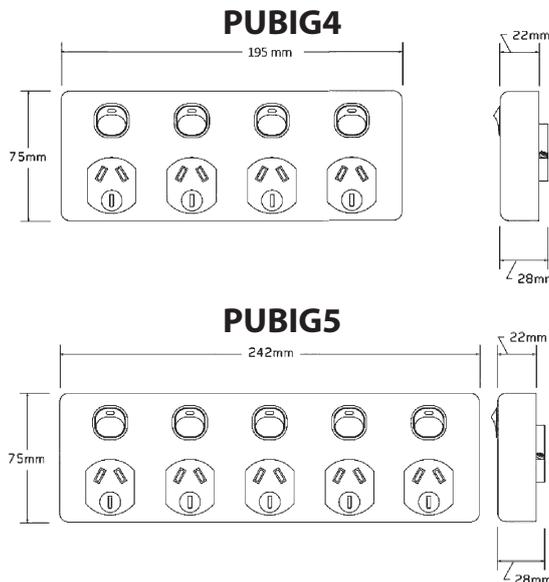

**PUBIG4MB and PUBIG5MB Mounting Blocks are used in conjunction with PUBIG4 & PUBIG5**  
**(Separate Data Sheet available with measurements details)**

- 25mm high mounting block to suit PUBIG4, LEBIG4, PUBIG5 and LEBIG5
- Made from UV stabilised polycarbonate to avoid discolouring to yellow
- BIG4 Mounting blocks include backing plates for situations where fully enclosed insulation is required.
- BIG5 Mounting blocks include backing plates for situations where fully enclosed insulation is required.

When ordering BLACK product add "BK" at end of catalogue number, ie PUBIG5BK  
 When ordering MATT WHITE add "MW" at end of catalogue number, ie PUBIG5MW  
 When ordering MATT BLACK add "MBK" at end of catalogue number, ie PUBIG5MBK

**Certification Number:** GMA-507804-EA

**GSM Electrical (Australia) Pty Ltd**  
 Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
 P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au  
[www.gsm.com.au](http://www.gsm.com.au)



**PUBIG4MB  
PUBIG4MBBK  
PUBIG5MB**

\*See current catalogue for further detail



**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.



Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma BIG4 and BIG5 Fixed Power Points - Mounting Blocks

- 25mm high mounting block to suit PUBIG4 and PUBIG5.
- Made from UV stabilised polycarbonate to avoid discolouring to yellow.
- BIG4 Mounting block available in White or Black
- BIG5 Mounting block only available in White
- BIG4 and BIG4 Mounting blocks include backing plates for situations where fully enclosed insulation is required.

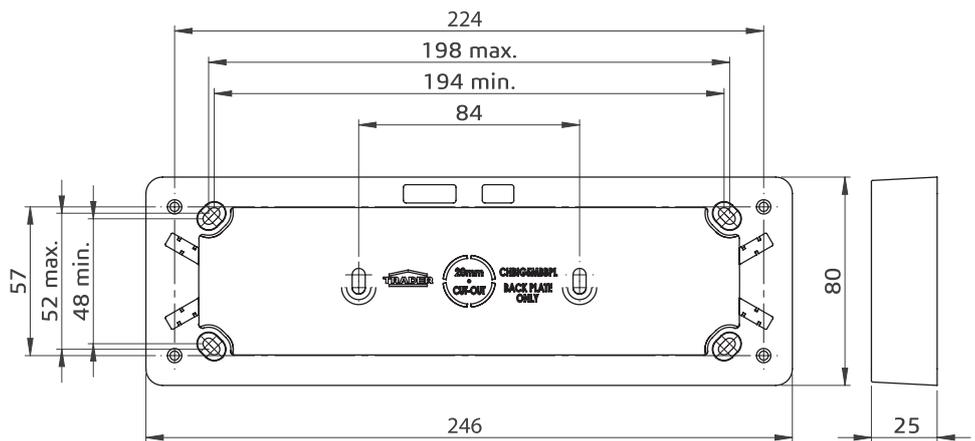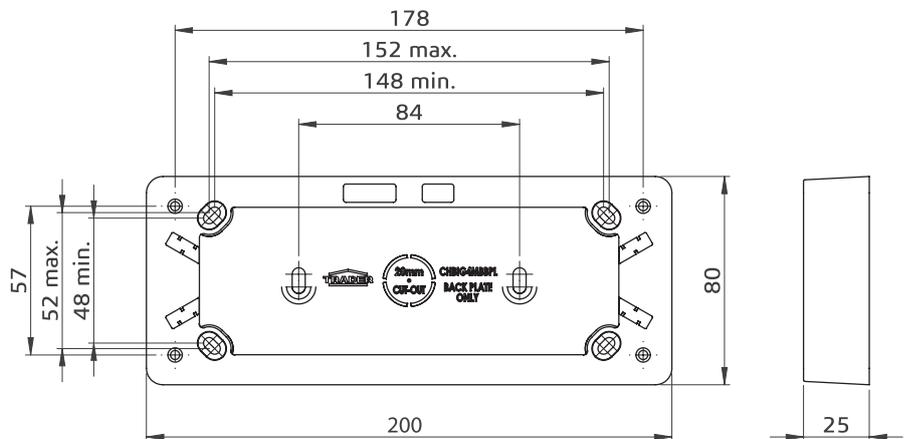

| Catalogue Number | Description                                |
|------------------|--|
| PUBIG4MB         | 4 Gang Mounting Block, for PUBIG4B         |
| PUBIG4MBBK       | 4 Gang Mounting Block, Black, for PUBIG4BK |
| PUBIG5MB         | 5 Gang Mounting Block, for PUBIG5          |

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au

[www.gsm.com.au](http://www.gsm.com.au)



Data Specification Sheet  
230222


**PU4X4  
PU4X4AC  
PU4X2ACSW**

\*See current catalogue for further detail

## 4 x 4/2 – 4 Power Points x 4/2 USBs


### PU4X4

- Approved to AS/NZS3112 & AS/NZS60950-1
- Four power points and four USB ports
- Wide spacing between power points for wide plug bases.
- Mounting Block [PU4X4MB] suits Puma 4X4 Products
- The rating for the USB is 2 x 3.1A at 5V when one device is inserted then it divides to split the output when a device is inserted in each USB socket - 3.1A available across 2 USB outlets on the left and 3.1A available across 2 USB outlets on the right.
- Fits standard wall boxes and mounting accessories
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White. Also available in Black, Matt White and Matt Black  
- please check availability

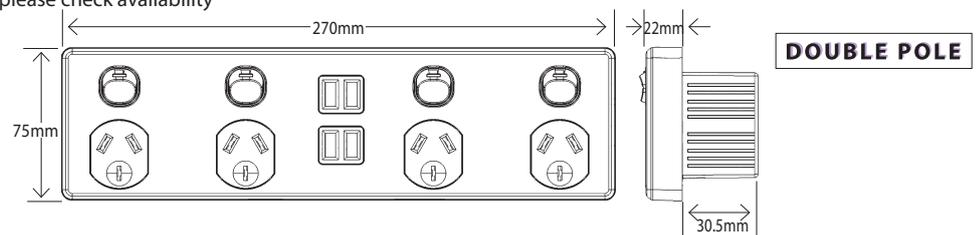

### PU4X4AC & PU4X2ACSW

- Approved to AS/NZS3112 & AS/NZS60950-1
- Suitable for USB Type C applications up to 3 Amp at 5V.
- Ideal for phones that utilise USB Type C connections.
- Not suitable for lap tops or other devices requiring greater output than 3 Amp at 5V.
- Four power points and four USB ports
- Wide spacing between power points for wide plug bases.
- PU4X2ACSW comes with a removable switch.
- Mounting Block [PU4X4MB] suits Puma 4X4 Products
- The overall electronic assembly rating is 3.1A at 5V; it then divides the output when devices are inserted in each USB socket.
- Fits standard wall boxes and mounting accessories
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White.

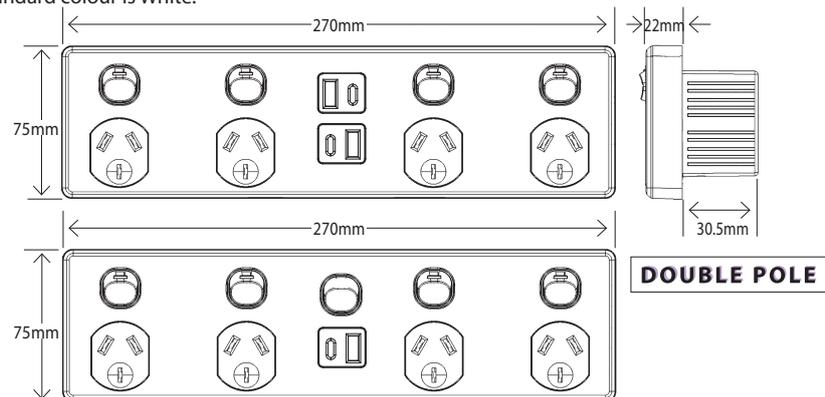

#### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



| Catalogue Number | Description  |
|------------------|--|
| PU4X4            | Power Point Switched 4 Gang, 10A 250V~ and 4 USBs  |
| PU4X4AC          | Power Point 4 Gang 10A 250V~ Double Pole Plus 4 Gang USB Charger Type A & C (3.1A Top & 3.1A Bottom)   |
| PU4X2ACSW        | Power Point Switched 4 Gang 10A 250V Double Pole Plus 2 Gang USB Charger Fully Integrated Type A&C 5V 1.7A 3.4A Removable Extra Switch 10A Double Pole |

When ordering BLACK product add "BK" at end of catalogue number, ie PU4X4BK

When ordering MATT WHITE product add "MW" at end of catalogue number, ie PU4X4MW

When ordering MATT BLACK product add "MBK" at end of catalogue number, ie PU4X4MBK

When ordering BLACK product add "BK" at end of catalogue number, ie PU4X4AC4BK

**Certification Number:** GMA-502543-EA

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

[www.gsme.com.au](http://www.gsme.com.au)



**PUBIG4CA  
PUBIG5CA**


## BIG4 and BIG5 Fixed Power Point Covers Aluminium Look

### PUBIG4CA


- Cover are moulded and painted silver to provide the appearance of Aluminium from a distance.
- Covers have been colour matched and finished to complement other PUMA products with Brushed Aluminium covers fitted.
- Suits PUBIG4 (White) and PUBIG4BK

### PUBIG5CA

- Cover are moulded and painted silver to provide the appearance of Aluminium from a distance.
- Covers have been colour matched and finished to complement other PUMA products with Brushed Aluminium covers fitted.
- Suits PUBIG5 (White) and PUBIG5BK

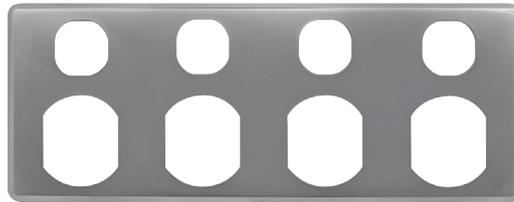

Order code: PUBIG4CA

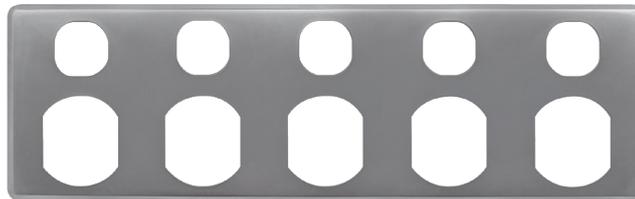

Order code: PUBIG5CA

#### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



| Catalogue Number | Description                               |
|------------------|---|
| PUBIG4CA         | 4 Gang Fixed Power Point, Cover Aluminium |
| PUBIG5CA         | 5 Gang Fixed Power Point, Cover Aluminium |

\*Note: The mounting blocks PUBIG4MB and PUBIG5MB are not available in this finish.

**PUBIG4MB and PUBIG5MB Mounting Blocks** are used in conjunction with PUBIG4 & PUBIG5 (Separate Data Sheet available with measurements details)

- 25mm high mounting block to suit PUBIG4 and PUBIG5
- Made from UV stabilised polycarbonate to avoid discolouring to yellow
- BIG4 Mounting blocks include backing plates for situations where fully enclosed insulation is required.
- BIG5 Mounting blocks include backing plates for situations where fully enclosed insulation is required.

**Certification Number:** N/A

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

[www.gsme.com.au](http://www.gsme.com.au)



**PU4X4MB  
PU4X4MBBK**

\*See current catalogue for further detail



**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma 4X4 Mounting Blocks

- 31mm high mounting block to suit LE4X4 (34mm with backing plate) .
- Made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Mounting block includes backing plate for situations where fully enclosed insulation is required.
- Standard colour is white. Black also stocked - please check availability.

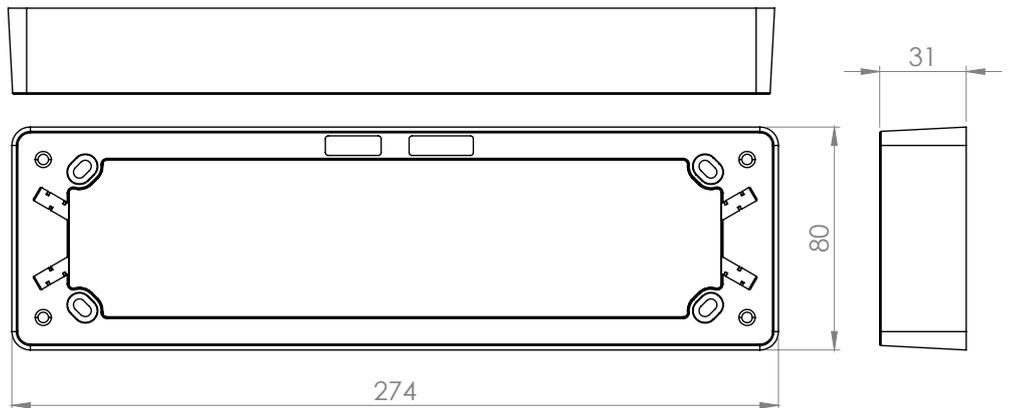

| Catalogue Number | Description   |
|------------------|---|
| PU4X4MB          | Mounting Block (31mm deep) / with backing plate (34mm deep)       |
| PU4X4MBBK        | Mounting Block (31mm deep) / with backing plate (34mm deep) Black |

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au  
[www.gsme.com.au](http://www.gsme.com.au)



**PUUSB2G**  
**PUUSB4G**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


Do not wash the cover plates in water over 60°C.



**Puma Range of USB's**


**PUUSB2G**

- USB outlet approved to AS/NZS 60950.1
- The rating for the USB is 3.4A at 5V when one device is inserted then it divides to split the output when a device is inserted in each USB socket
- USB power supply contains temperature cut out and overload protection
- Fits standard wall boxes and mounting accessories
- Full cover plate
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white.

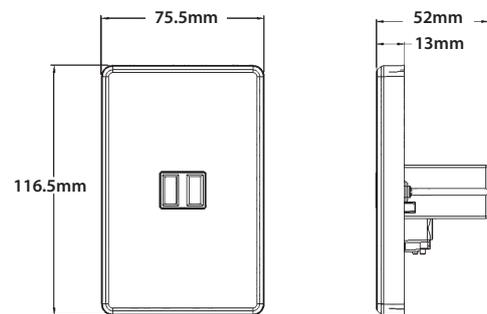

**PUUSB4G**

- USB outlet approved to AS/NZS 60950.1
- The rating for the USB is 2 x 3.1A at 5V when one device is inserted then it divides to split the output when a device is inserted in each USB socket - 3.1A available across 2 USB outlets on the left and 3.1A available across 2 USB outlets on the right
- USB power supply contains temperature cut out and overload protection
- Fits standard wall boxes and mounting accessories
- Full cover plate
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white.

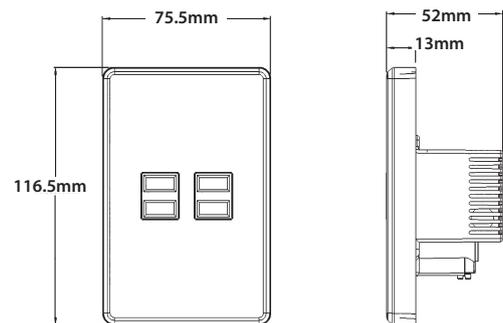

| Catalogue Number | Description                                  |
|------------------|--|
| PUUSB2G          | Fully Integrated 3.4A Dual USB Charger Plate |
| PUUSB4G          | Fully Integrated Quad USB Charger Plate      |

**Certification Number:**  
PUUSB2G / PUUSB4G: GMA-508370-EA

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au  
[www.gsme.com.au](http://www.gsme.com.au)



**PUPP2USB2G**  
**PUPP2USB2GAC**  
**PUPP2USB2GBK**  
**PUPP2USB2GACBK**

**Cleaning Guide:**


Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended. It is important to ensure that switches are turned off before cleaning. Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic. Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack. Do not wash the cover plates in water over 60°C.



## Puma Range of USB's


### PUPP2USB2G

- USB outlet approved to AS/NZS 60950.1
- Electrical power point approved to AS/NZS 3112
- The rating for the USB is 3.4A at 5V when one device is inserted then it divides to split the output when a device is inserted in each USB socket.
- Fits standard wall boxes and mounting accessories
- Full cover plate
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black and Brushed Aluminium covers also stocked - please check availability

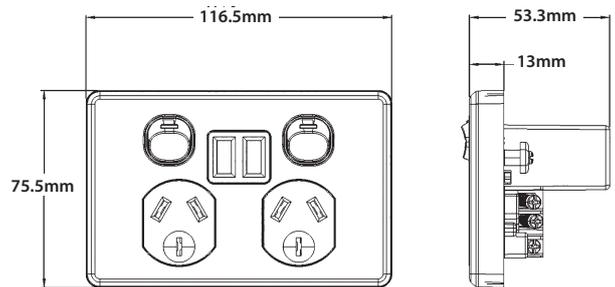

### PUPP2USB2GAC

- Suitable for USB Type C applications up to 3 Amp at 5V.
- Ideal for phones that utilise USB Type C connections.
- Not suitable for lap tops or other devices requiring greater output than 3 Amp at 5V.
- USB outlet approved to AS/NZS 60950.1
- Electrical power point approved to AS/NZS 3112
- The overall electronic assembly rating is 3.4A at 5V; it then divides the output when devices are inserted in each USB socket.
- Fits standard wall boxes and mounting accessories
- Full cover plate
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black and Brushed Aluminium covers also stocked - please check availability

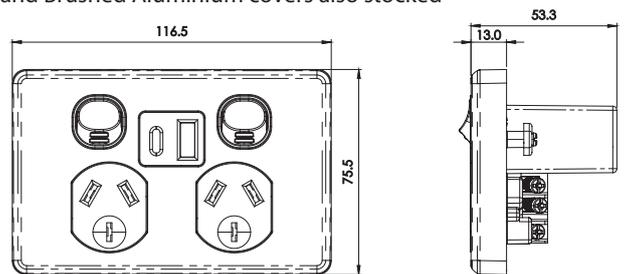

| Catalogue Number | Description   |
|------------------|---|
| PUPP2USB2G       | Fully Integrated Dual USB Charger Power Point                     |
| PUPP2USB2GAC     | Fully Integrated Dual USB Charger Power Point (Type A & C)        |
| PUPP2USB2GBK     | Fully Integrated Dual USB Charger Power Point, Black              |
| PUPP2USB2GACBK   | Fully Integrated Dual USB Charger Power Point (Type A & C), Black |

When ordering BLACK product add "BK" at end of catalogue number, ie PUPP2USB2GBK  
 When ordering BRUSHED ALUMINIUM (cover) add "CBA" at end of catalogue number, ie PUPP2USB2GCBA  
 When ordering REPLACEMENT "COVERS ONLY" add "CO" at end of catalogue number, ie PUPP2USB2GCO

**Certification Number:**  
 GMA-508273-EA

**GSM Electrical (Australia) Pty Ltd**  
 Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
 P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au  
[www.gsme.com.au](http://www.gsme.com.au)



## PUMB

\*See current catalogue for further detail

### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## PUMB Mounting Block

- 84mm mounting centres
- Suitable for use with Puma Range
- Made from UV stabilised polycarbonate to avoid discolouring to yellow
- Overall dimensions (length 117.5mm x width 76mm x depth 14mm)

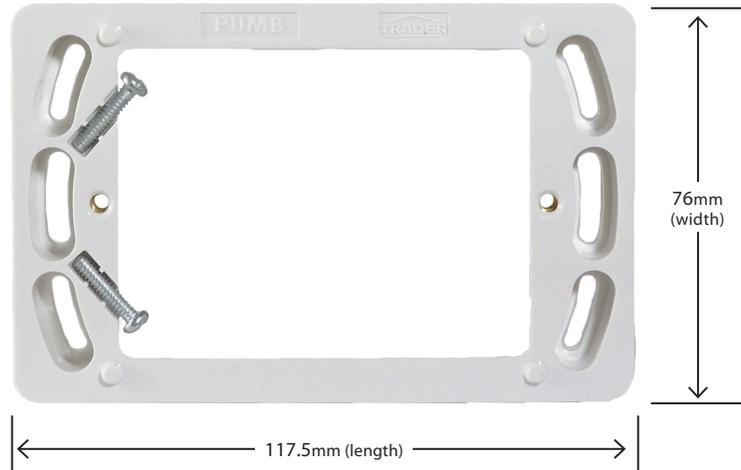

Front view



Side view



Back view

| Catalogue Number | Description         |
|------------------|---------------------|
| PUMB             | Puma Mounting Block |

**PUPPSHELF  
PUPPUSBSHELF**

**For use with:  
PUPP2G  
PUPP2USB2G**

Also suitable for use with  
Clipsal C2000 Series\*

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



**Puma Power Point & USB Shelf**

- Suitable for use with Puma style plates
- Includes screws and screw caps for secure retention on wall
- No need to remove wall plates from wall for installation of the shelf
- Also suitable for use with Clipsal C2000 Series\*



Example of the shelf in use with PUPP2G



Example of the shelf in use with PUPP2USB2G



Example of the PUPPSHELF in use



Example of the PUPPUSBSHELF in use

Includes screws and screw caps



\*All similar products are Clipsal references and Clipsal is the Trademark of Schneider Electric Pty Ltd.

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au  
[www.gsm.com.au](http://www.gsm.com.au)



Data Specification Sheet  
December 2017

**PUENTP3G**  
(Empty)

**PUENTP3GTVA**  
(Populated)

**PU** = Puma **ENT** = Entertainment  
**P** = Plate **3G** = 3 GANG  
**TVA** - Television Accessories (Foxtel TV, Cat 6 Data and HDMI (2.0) all included)

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended. It is important to ensure that switches are turned off before cleaning. Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic. Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack. Do not wash the cover plates in water over 60°C.



**Puma Entertainment Plates**

**PUENTP3G (Empty) and PUENTP3GTVA (Populated)**

- Protrudes from wall 31mm
- Mounting centres standard 84mm
- PUMA style cover finishes the appearance

Product comes in two forms, empty apertures or pre populated:


**PUENTP3G (Empty)**

For use with any form of Trader or Clipsal\* style clip in Audio Visual or Data Jack products

**PUENTP3GTVA (Populated)**

Comes with Cat6 Data Jack [MERJ6CM], HDMI Cable with 2 Fem Clips 18 cm [MEHDMI] and Foxtel approved F-type connector [METVFFCMFX] with 90° screwed adaptor [METVFFA90FX].

**WARNING: This product is not approved for use with 250V~ switches**

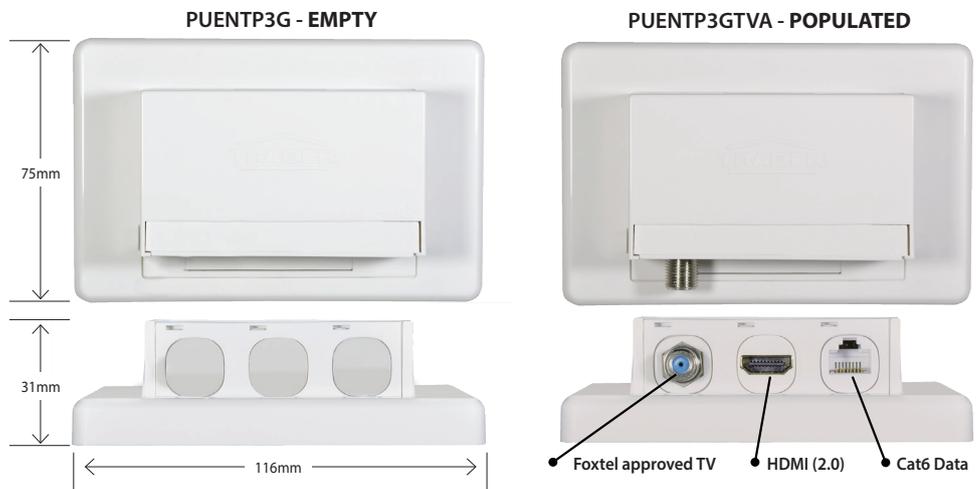

Jack clip in plate comes separate for easy installation and termination



Pre-assembled and terminated plate can be rotated into position and clipped into place.



View shows underside where plate has been completely clipped in.



View shows assembly where plate has been completely clipped in ready for installation.



Examples of alternative solutions showing audio visual jacks being fitted to the Puma Entertainment Plate product

\*Clipsal is registered trademarks of Schneider Electric (Australia) Pty Ltd. Reference is made for suitability of use only. GSM Electrical (Australia) Pty Ltd, the TRADER brand and it's products, have no endorsement or affiliation with Schneider Electric Pty Ltd.

**GSM Electrical (Australia) Pty Ltd**  
 Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
 P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au  
[www.gsme.com.au](http://www.gsme.com.au)



**PUPP2GSK  
PUPP2GSK1015**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Double Power Point, Skirting Mount

- The Double Power Point assembly consists of two single power points that are looped together (loops are included).
- The slim design is ideal for skirting board applications or thin timber panel mounting where space is an issue.
- The styling of the plate aligns with the rest of the PUMA range.
- The power point is only available in single pole format.
- Slim profile of 54mm high.
- Depth into the wall including the wire loops is 26mm.
- 135mm mounting centres.
- Length overall with cover 160mm.
- Variations available (2x 10A) or (1x 10A & 1x 15A)
- Available in White.

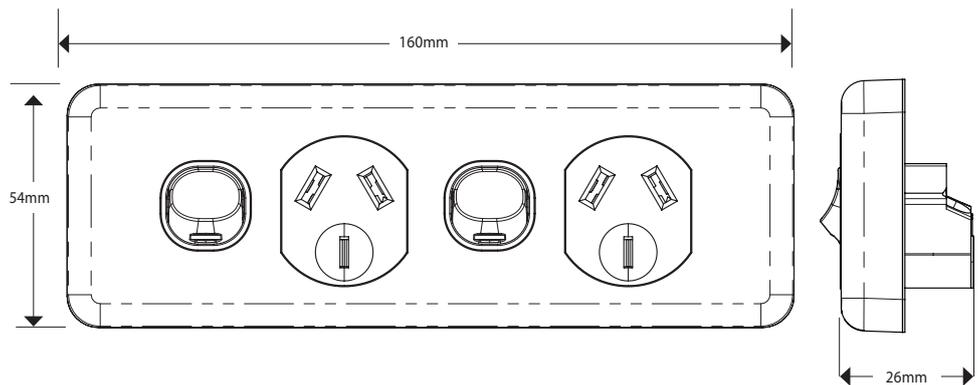

| Catalogue Number | Description  |
|------------------|--|
| PUPP2GSK         | Power Point Switched 2 Gang, Skirting Mount, 10A 250V~                         |
| PUPP2GSK1015     | Puma Power Point Switched 2 Gang Skirting Mount 10A and 15A Sockets 250V White |

**Certification Number:**  
GMA-509981-EA

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au  
[www.gsme.com.au](http://www.gsme.com.au)



**PUPP4G  
PUPP4GBK**

\*See current catalogue for further detail

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



**Puma Range of 4 Gang Power Points**

- 183mm mounting centers
- Supplied 2 gang wall bracket
- Pre-wired with a 240mm cable loop for easy installation to suit 1 power circuit
- 13mm thick
- Single Pole switched
- 10A 250V
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Approved to AS/NZS3112.
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power Point terminals have 5.8mm bore to suit 4 x 2.5mm<sup>2</sup> cable.
- Standard colour is White. Also available in Black - please check availability

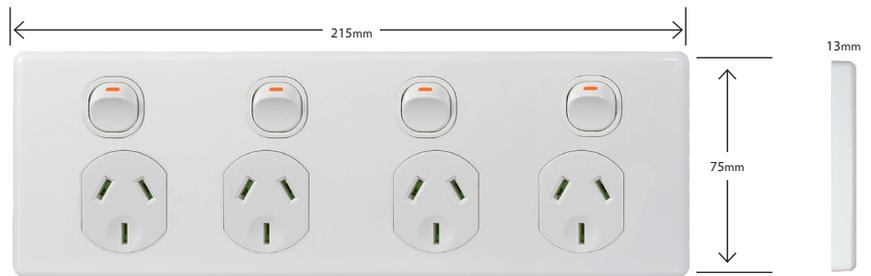

| Catalogue Number | Description   |
|------------------|---|
| PUPP4G           | Power Point Switched 4 Gang 10A 250V Flush Mount with Custom Mounting Bracket       |
| PUPP4GBK         | Power Point Switched 4 Gang 10A 250V Flush Mount with Custom Mounting Bracket Black |

**Certification Number:**  
GMA-508660-EA

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au  
[www.gsme.com.au](http://www.gsme.com.au)



Data Specification Sheet  
August 2024