

Flare-400

Commercial LED Flood Light (Flex and plug)



Description

FLARE Series Commercial LED Floodlights are built for dependable performance across commercial, industrial and sporting applications. Designed to suit demanding Australian conditions, the range offers a practical, flexible solution that simplifies project selection and installation with a variety of different beam angle lens options.



The C5 Marine Grade black powder coated aluminium body delivers a clean architectural look, while the clear glass lens provides strong, even illumination suited to large open areas. Supplied with 2M flex and plug plus an adjustable mounting bracket, it is ready for straightforward installation. Optional bracket accessories are available for specialised mounting requirements.

Specification Features

Input Voltage:	240V AC		
Power (W):	240W / 320W / 400W		
IP rating (IP):	IP65		
IK Rating (IK):	IK08		
Lumens (lm):	240W	320W	400W
Neutral White 4000K	36888.8lm	47794.7lm	57670.4lm
White 5000K	36888.8lm	47794.7lm	57670.4lm
CCT:	4000K - 5000K		
CRI:	≥80		
Surge Protection:	10KV		
Cable:	2M flex and plug		
Sensor:	Built-in daylight sensor		
Standard Beam Angle (°):	120°		
Optional Beam Angles (°):	30°, 60°, 90°		
	T2M, T3M, T4M & 110x45°		
Dimmable:	No		
Average Lifespan (hrs):	50,000hrs		



Diagrams / Additional

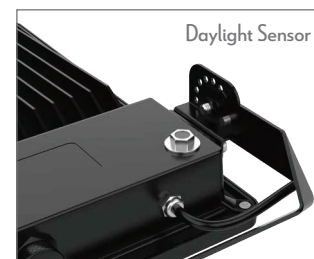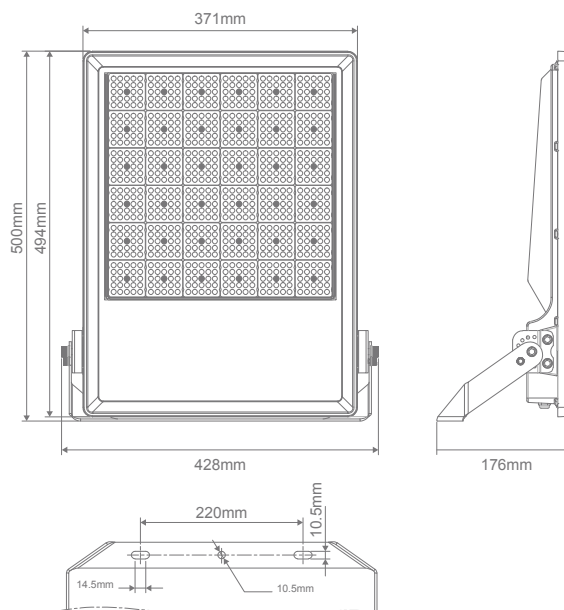

Item No.	Variant								CCT
	120°	90°	60°	30°	T2M	T3M	T4M	Tennis	
FLARE-400	19236	19237	19238	19239	19240	19241	19242	19243	4000K
	19245	19246	19247	19248	19249	19250	19251	19252	5000K

Item No.	Variant
FLARE-CNR-BKT	19288

Item No.	Variant		
	50cm	100cm	120cm
FLARE-SIGN-BKT	19290	19291	19292