

## YETI LED DOWNLIGHT W/ INTEGRAL DRIVER

### Features

- Installation: Recess ceiling mount
- Robust adjustable CTC switch
- Thermal conductive housing for rapid heat dissipation and longer life
- Suitable for damp locations and indoor areas
- EzifiX accessory rings available in various finishes
- CRI = Ra82
- lm = per W: 85-90lm
- Beam angle: 120°

### Specifications



Frame and Body: PC polycarbonate  
 Lens Cover: PMMA  
 Spring Clips: Electroplated Steel  
 LED Chip Type: SMD 2835  
 Input Voltage: 220–240Vac 50Hz  
 Input Rated Voltage: 230V  
 Electrical Classification: II  
 LED Driver: Dimmable  
 Dimming Type: Leading Edge/Trailing Edge  
 Power Factor: ≥0.9  
 Efficiency: ≥85%  
 Output Current: 135mA  
 Operating Temperature: -10°C–45°C  
 Operating Humidity: 0-90%  
 Ingress Protection: IP44 rated  
 Insulation Contact: IC-4 rated

### Application

Ideal for multiple domestic and commercial areas i.e. retail shopping centres, offices, conference rooms, hotels and confined living spaces



Luminous Intensity Distribution Curve

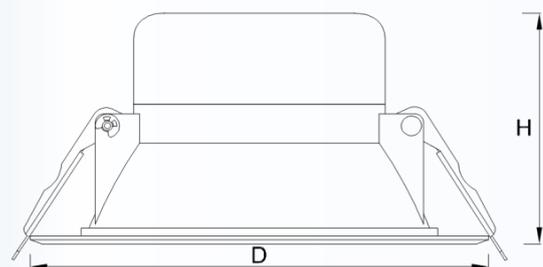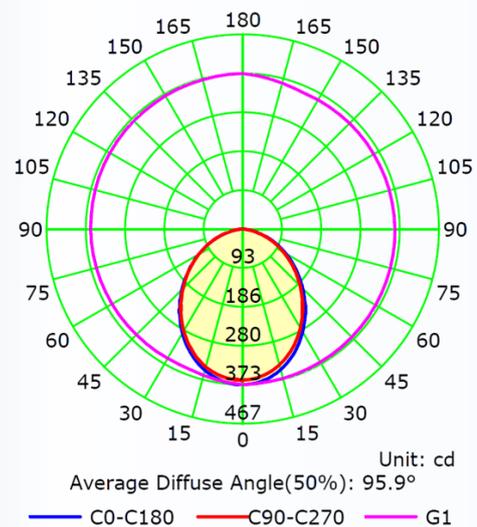

Part No.	Watts	CCT	Lumen Output	LED Qty	Finish	Cut-out	Diameter	Height
NLS20111	10W	3K  4K  6K	850-950lm	40	White	90mm	115mm	60mm