



This product must be installed by a licensed electrician

Features

- Wi-Fi (No hub required)
- No neutral required
- Interchangeable with most popular brands
- White LED to indicate switch status
- Combination head screws
- On/off control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty



Network/Device Requirements


| | |
|--------------------|---|
| Connectivity | Wi-Fi |
| Requirements | Existing 2.4GHz Wi-Fi network |
| Protocol | IEEE 802.11 b/g/n |
| Wireless Frequency | 2.4GHz |
| App Requirements | Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs) |

Technical Specifications

| | |
|------------------------|---|
| Neutral Required | No |
| Supply Voltage | 230 - 250V a.c. 50Hz |
| Standby Wattage | <1W |
| Operating Load | 5W – 300W (resistive) 5W - 400W(LED) ⁽¹⁾ |
| Switching Poles | 1 |
| IP Rating | IP20 (Indoor use only) |
| Terminal Size | 3.5mm ² (can fit up to 3 x 1.5mm ² wires per terminal) |
| Colour | White button, Yellow housing |
| Rear Colour | Yellow |
| Housing Material | Polycarbonate |
| Contact Material | Brass |
| Weight | 35g |
| Dimensions | 24mm x 40mm x 47mm |
| Compliance / Standards | AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, CISPR 15, CISPR 32 |

⁽¹⁾ Mercator load correction device required if load is less than 12W

Dimensions

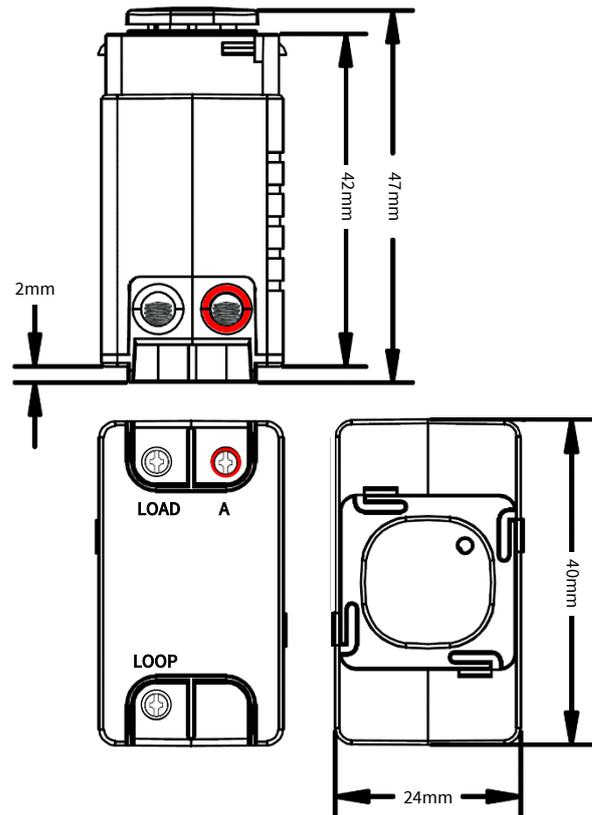

This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuu contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.

