

## SHOWCASE COMMERCIAL LED DOWNLIGHT

### Features

- Installation: Recess ceiling mount
- Dimmable LED driver w/ DC barrel connection
- CTC colour switching
- CRI: >80Ra
- High density ACD12 heatsink for rapid heat dissipation and life longevity
- Lifetime: 50 000Hrs
- Prewired w/ flex and plug

### Specifications

Body and Heatsink: ACD12 Aluminium

Frame and Lens Cover: PMMA

Spring Clips: Electroplated steel 316

LED Chip: 2835 SMD

Input Voltage: 220-240Vac 50Hz

Electrical Class: II

Driver: Constant current

Power Factor: 0.9

Input Current: 0.2A

Output Current: 0.9A

Operating Temp: -10°C—45°C


Operating humidity: 0—90%

Ingress Protection: IP44

Insulation Contact: IC-4




Luminous Intensity Distribution Curve

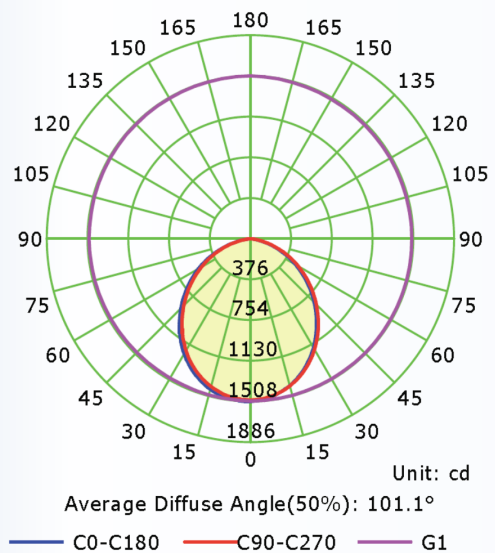

### Application

Ideal for commercial and retail outlet applications

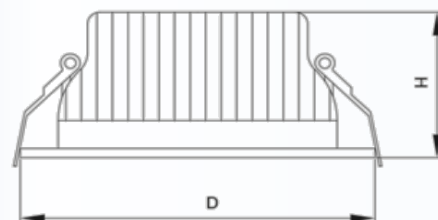

Part No.	Watts	CCT	Lumen Output	LED Qty	Finish	Cut-out	Diameter	Height
NLS20320	40W	3K 4K 6K	3200-3600lm	84	White	230mm	255mm	75mm