

## OPAL LED OYSTER LIGHT

### Features


- Installation: surface mount
- High efficiency lumen output
- Centred 25mm bushed cable entry on backplate for precise mounting and easy installation
- CTC colour temperature switch-3K/4K/6K
- Twist-lock diffuser for quick maintenance
- Includes fitted transparent dust shield
- 30 000Hr average life expectancy
- Non-dimmable

### Specifications

Body: Aluminium  
 Diffuser: PMMA  
 Finish: White  
 Light Source: LED-2835 SMD  
 CCT: CTC 3K/4K/6K  
 Input: 220-240V 50-60Hz  
 Efficiency: ≥85%  
 Driver: Constant current  
 Ingress Protection: IP20

### Application

Ideal for domestic and residential living areas

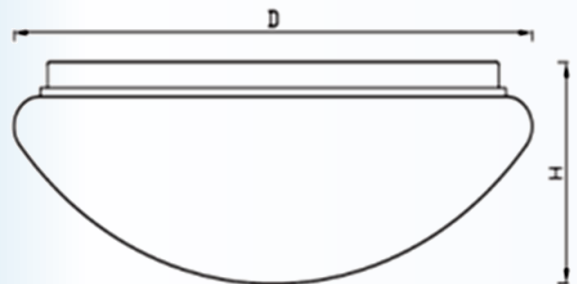

# LED OYSTER LIGHT

## P L A T I N U M S E R I E S

Part No.	Watts	Lumen	Power Factor	In-Current	Out-Current	Diameter	Height
NLS20344	18W	Up to 1450lm	≥0.5	0.17A	135mA	320mm	100mm
NLS20347	28W	Up to 2250lm	≥0.9	0.26A	250mA	380mm	110mm