

LED BATTEN LIGHT

PLATINUM SERIES

Product Features:


- Easy installation
- Central hole for input power cable
- Built-in terminal block
- Aluminium body and PC cover
- IP20 for indoor use
- 3CCT switch control inside (3000K/4000K/6000K)

Application:

Designed for surface mount ceiling applications, domestic and commercial.

Technical Specification

Cover:	Polycarbonate
Housing:	Aluminium
Mounting:	Surface or Hanging
Beam Angle	220°
Light Category:	LED
LED Type:	LED SMD 2835
CRI:	>80Ra
Lumen Efficiency:	120lm = per Watt
Colour Temperature:	3000/4000/6000K
Input Voltage AC:	220-240V 50Hz
Power Factor:	>0.9
Operating Temperature:	-5°C—55°C

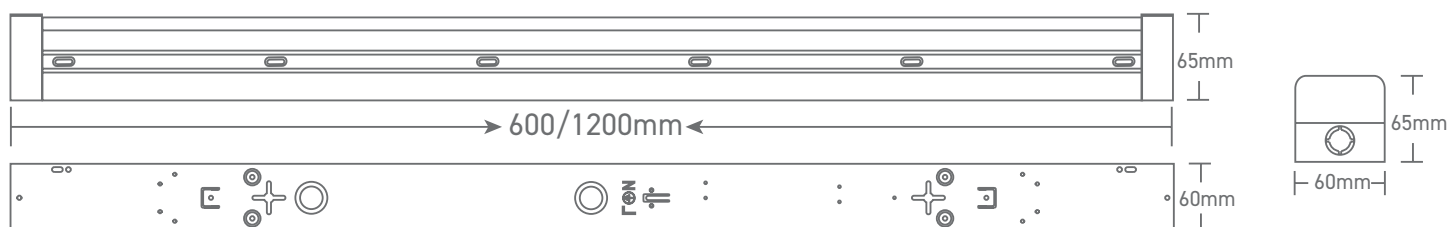

Part No.	Watts	CCT	Lumen	LED	Length	Width	Height
NLS20355	20W	3000/4000/6000K	2400lm	SMD 2835	600mm	60mm	65mm
NLS20400	40W	3000/4000/6000K	4400lm	SMD 2835	1200mm	60mm	65mm

IMPORTANT

Must be installed: To manufacturer specifications and by a qualified licensed electrician.

NationalNLS®

National Light Sources supply only the highest of quality using the latest technology ensuring high lumen maintenance and longer life. Complies to all AS / NZS standards and specifications.

National Light Sources Pty Ltd
Australian Owned & Operated
sales@nlsight.com.au
www.nlsight.com.au