

Let's get connected.

Single and Dual Blind Controllers.



1 Important - Read before installing.

Must only be installed by a LICENSED ELECTRICIAN to local wiring regulations.



Failure to follow these instructions can result in serious injury or death.



Powermesh devices must only be connected with the Active and Neutral from the same RCD.

Surge protection is recommended at the main switchboard. Products damaged by power surges are not covered by warranty.

AVOID THE RISK OF ELECTRIC SHOCK
Once the product has been fastened to the wall, ensure the screw caps are inserted firmly into place over the screw mounting holes.

Megger testing may lead to low readings due to electronic components so disconnect all electronic devices before taking a reading. Install the included warning sticker with circuit detail in the main electrical switchboard.

2 Using the Blind Controller.


Blind Switch

- Single press to open or close
- Press to stop

Open / Stop

Close / Stop

LED indicator pulses when moving.

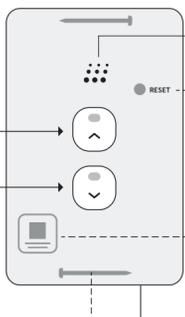

Status Indicator
See overleaf for the meaning of each colour status.

Factory Reset
Press until indicator flashes blue to restore factory settings. When the indicator turns blue, it's ready to pair. (remove cover)


MAC ID
Unique product serial number. (remove cover)

Mounting Screws
Included on rear of device.



Snap on cover

3 Identifying the Blind Controllers.

2 Button PMBC2



4 Button PMBC4

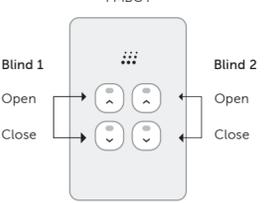

4 Single Blind Controller.


Specifications



Part Number
White PMBC2
Black PMBC2BK

Compatible Loads
Small motor rating: M.40

Rated Loads
600W (2.5A) max, 230V~ 50Hz

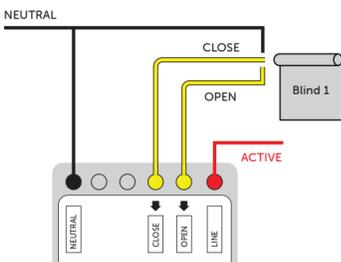

5 Dual Blind Controller.


Specifications



Part Number
White PMBC4
Black PMBC4BK

Compatible Loads
Small motor rating: M.40

Rated Loads
600W (2.5A) max per channel, 230V~ 50Hz

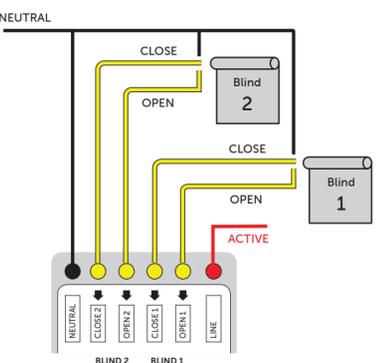


6

Pair and setup with Zimi.



- Download the Zimi App.
- Choose 'Add New Device'.
- Follow the on screen instructions.

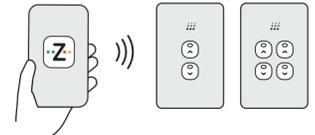

Download Zimi App.

Point your phone camera at the QR code to open the app store.



7

Zimi Cloud Connect.

Enjoy the full experience with all your Zimi devices.



Remote access anywhere.



Voice control hands free.



Sunrise & Sunset schedules.

Internet connection required.

8

Want to learn more or need help?

Enjoy all the features to make your life easier. Visit our website for tips, tricks and help.

support.zimi.life



Smart Blinds
Switch, app and voice control.



Schedules
Automatically open and close.



Double press
Control all your connected blinds.

9

Status Indicator.

	Blue	Ready to pair. 'Add New Device' in Zimi to pair and complete setup.
	White	Setup is complete. This device has been paired and setup completed.
	White pulsing	Action in progress. This lets you know an automatic function is being activated.
	Blue & White pulsing	Identify device. This shows the device when updating its settings.
	Red	Device problem. Please refer to support to resolve the problem.
	Off	Indicator is off. The status indicator can be turned off and on in settings.

Manufacturer's Warranty This product has been manufactured to the highest quality standards. This product is warranted to the original purchaser and is not transferable. The product is guaranteed to be free from defects in workmanship and parts for a period of 1 year from the date of purchase. Defects that occur within this warranty period, under normal use and care will be repaired, replaced or refunded. The benefits conferred by this warranty are in addition to all other rights and remedies of the consumer under a Commonwealth, State and Territory laws in relation to the goods or services to which this warranty relates and Australian Consumer Law. Risk in regard to the product to be repaired shall at all times remain with the Purchaser. The warranty is given on the condition that the product to which it applies is used for the purpose and in the manner intended by its construction and for no other purposes whatsoever. Zimi Ltd shall not be responsible for damage of any kind, caused by accidents, power surges, electrical storm damage, incorrect power current, infestation (vermin or insect), incorrect installation, incorrect electricity or plumbing installation, improper use of controls or failure to use the unit in accordance with the operating instructions, general misuse or abuse or from normal wear and tear. Any attempt by an unauthorised person to repair or tamper with the equipment shall render the warranty null and void. Goods presented for repair under this warranty may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. Zimi Ltd's liability under this warranty is limited to the replacement and/or repair of the defective parts within the warranty period and does not extend to installation or removal of the product. Acceptance of liability by Zimi Ltd contained herein is to the exclusion of any other remedy whatsoever and howsoever arising in respect of any equipment to which it applies.

Proof of Purchase Please keep your purchase docket or receipt as proof of purchase and as proof of the date on which the purchase was made. The purchase docket or receipt must be presented with the warranty when making a claim under this warranty. Failure to produce documentary proof of the date of original acquisition by the original Purchaser will result in a charge being levied for work done, labour and parts supplied. Likewise a charge will be made for any calls following warranty claim where no fault is found with the unit.

Service during the warranty period The first point of contact for product issues is the place of purchase. The product must be returned to the original place of purchase for product repair, replacement or refund. Please ensure the product is properly packaged so as to ensure that no damage occurs to the product during transit and make sure that you have included an explanation of the problem. In the event of goods requiring repair under manufacturer's warranty the owner is responsible for the cost of transportation. Should the goods be found to be in sound working order the owner might be charged a fee. This warranty is given by Zimi Ltd, 14 Millennium Circuit, Helensvale, QLD 4212.

Safety Warnings Read all instructions and safety information. All electrical work must only be undertaken after disconnection of the power by removing fuses or turning off the circuit breaker, to ensure all pole disconnection from the electrical supply. All electrical work must be carried out by a licensed and qualified electrician and in accordance to AS/NZS 3000 Wiring Rules and applicable

local authority regulations. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for their safety. Young children should be supervised to ensure they do not play with the unit. Do not cut or notch joists, beams and rafters to install the unit. Do not damage hidden electrical wiring or utilities when cutting. The product must be installed so switches and other controls cannot be touched by a person in the bath or shower. Do not install the product in a location where water will splash onto it. Check and confirm that all connections are proper and secure to prevent causing property damages or injury. Do not install outdoor where it could be exposed to water or moisture (indoor use only).

Trademarks Zimi and Powermesh and their respective logos are registered trademarks of Zimi Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries.

Copyright © 2022 Zimi Ltd. All rights reserved.



14 Millennium Circuit
Helensvale QLD 4212
Australia.
www.zimi.life



Let's get connected.

Fan Controller with Light Switch.





1 Important - Read before installing.



Must only be installed by a LICENSED ELECTRICIAN to local wiring regulations. Failure to follow these instructions can result in serious injury or death.

This is a semiconductor switching device, the mains power MUST BE SWITCHED OFF before performing any wiring or maintenance work.




Screw caps ↓
Screw mounting holes

AVOID THE RISK OF ELECTRIC SHOCK
Once the product has been fastened to the wall, remove the screw caps and insert firmly into the screw mounting holes.

Factory Reset
Remove the cover and press the RESET button until the Powermesh indicator flashes blue. Release the button and when the indicator turns blue, it's ready to pair.

2 Using the Fan Controller.

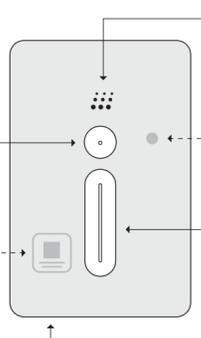

- Powermesh Status Indicator**
See overleaf for the meaning of each colour status.
- Reset Button**
- Light Switch**
Touch for on / off.
- MAC ID**
Unique product serial number.
- Fan Speed**
Touch for on/off. Slide to change speeds. Triple tap for **Speed Sense**, to sync fan speed with temperature.
- Snap on cover**

3 Connect the wiring.



Surge protection is recommended at the main switchboard. Products damaged by power surges are not covered by warranty.

Specifications


Part Number: **PMFC, PMFCBK**

Line Voltage Frequency: **50Hz Nominal**

Fan Load: **120 watts maximum @ 240V**

Light Load: **250 watts maximum @ 240V**

7 speed capacitor control: **1.1-3.3µF + full speed Suitable for AC fans only**

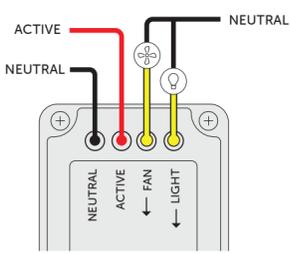

4 Pair and setup with Zimi.




- Download the Zimi App.
- Choose 'Add Device'.
- Follow the on screen instructions.



Zimi App Download
Point your phone camera at the QR code to open the app store.



5 Zimi Cloud Connect.

Enjoy the full experience with all your Powermesh devices.

works with **Hey Google**

WORKS WITH **alexa**



Remote access anywhere.

Voice control hands free.

Energy history over time.

Requires Wi-Fi with Internet connection.

6 Want to learn more or need help?

Enjoy all the features to make your life easier. Visit our website for tips, tricks and help.

support.zimi.life



Speed Sense
Sync fan speed with temperature.



Schedules
Turn it on and off any day or time.



Energy Use
Monitor the power usage and cost.



Auto off Timer
Turn it off automatically.

7 Powermesh Status Indicator.

	Blue	Ready to pair. 'Add device' in Zimi to pair and complete setup.
	White	Setup is complete. This device has been paired and setup completed.
	White pulsing	Action in progress. This lets you know an automatic function is being activated.
	Blue & White pulsing	Identify device. This shows the device when updating its settings.
	Red	Device problem. Please refer to support to resolve the problem.
	Off	If the device is working, the indicator has been 'turned off' in device settings.

Manufacturer's Warranty This product has been manufactured to the highest quality standards. This product is warranted to the original purchaser and is not transferable. The product is guaranteed to be free from defects in workmanship and parts for a period of 1 Year from the date of purchase. Defects that occur within this warranty period, under normal use and care will be repaired, replaced or refunded. The benefits conferred by this warranty are in addition to all other rights and remedies of the consumer under a Commonwealth, State and Territory laws in relation to the goods or services to which this warranty relates and Australian Consumer Law. Risk in regard to the product to be repaired shall at all times remain with the Purchaser. The warranty is given on the condition that the product to which it applies is used for the purpose and in the manner intended by its construction and for no other purposes whatsoever. GSM Innovations Pty Ltd shall not be responsible for damage of any kind, caused by accidents, power surges, electrical storm damage, incorrect power current, infestation (vermin or insect), incorrect installation, incorrect electricity or plumbing installation, improper use of controls or failure to use the unit in accordance with the operating instructions, general misuse or abuse or from normal wear and tear. Any attempt by an unauthorised person to repair or tamper with the equipment shall render the warranty null and void. Goods presented for repair under this warranty may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. GSM Innovations Pty Ltd's liability under this warranty is limited to the replacement and/or repair of the defective parts within the warranty period and does not extend to installation or removal of the product. Acceptance of liability by GSM Innovation Pty Ltd contained herein is to the exclusion of any other remedy whatsoever and howsoever arising in respect of any equipment to which it applies.

Proof of Purchase Please keep your purchase docket or receipt as proof of purchase and as proof of the date on which the purchase was made. The purchase docket or receipt must be presented with the warranty when making a claim under this warranty. Failure to produce documentary proof of the date of original acquisition by the original Purchaser will result in a charge being levied for work done, labour and parts supplied. Likewise a charge will be made for any calls following warranty claim where no fault is found with the unit.

Service during the warranty period The first point of contact for product issues is the place of purchase. The product must be returned to the original place of purchase for product repair, replacement or refund. Please ensure the product is properly packaged so as to ensure that no damage occurs to the product during transit and make sure that you have included an explanation of the problem. In the event of goods requiring repair under manufacturer's warranty the owner is responsible for the cost of transportation. Should the goods be found to be in sound working order the owner might be charged a fee. This warranty is given by GSM Innovations Pty Ltd, 14 Millennium Circuit, Helensvale, QLD 4212

Safety Warnings Read all instructions and safety information. All electrical work must only be undertaken after disconnection of the power by removing fuses or turning off the circuit breaker, to ensure all pole disconnection from the electrical supply. All electrical work must be carried out by a licensed and qualified electrician and in accordance to AS/NZS 3000 Wiring Rules and applicable

local authority regulations. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for their safety. Young children should be supervised to ensure that they do not play with the unit. Do not cut or notch joists, beams and rafters to install the unit. Do not damage hidden electrical wiring or utilities when cutting. The product must be installed so that switches and other controls cannot be touched by a person in the bath or shower. Do not install the product in a location where water will splash onto it. Check and confirm that all connections are proper and secure to prevent causing property damages or injury. Do not install outdoor where it could be exposed to water or moisture (indoor use only).

Trademarks Zimi and Powermesh and their respective logos are registered trademarks of GSM Innovations Pty Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries.

Copyright © 2021 GSM Innovations Pty Ltd. All rights reserved.



14 Millennium Circuit
Helensvale QLD 4212
Australia.
www.zimi.life





Installation Instructions

Powermesh Garage Door Controller & Sensor

Important Safety Instructions

A garage door is the largest automated moving object in most homes. Please ensure that all safety recommendations and regulations are considered and adhered to.



This device allows for operation of the garage door when the door or opener is not in direct line of site.

As the door may operate unexpectedly you must ensure that there is no object near the path of the door. When the door is operating people must be kept away until the door has come to a complete stop. Contact with a moving door may result in serious injury, death or damage to property.




It is highly recommended that safety beams are fitted with all installations.

Safety beams must be installed in accordance with AS/NZ 60335-2-95:2012. Correctly installed safety beams will prevent the door from closing if a person or object is located within the door area.

In addition, monthly safety reverse tests and regular professional maintenance must be carried out as detailed in your opener's Installation and Operating Manual.

- This product, or any internet device that has the Zimi app installed, is not intended for use by children or persons with reduced physical, sensory or mental capabilities.
- The door sensor has an IP66 (water proof) rating however the controller should not be installed in a wet or damp space exposed to weather.
- Do not attempt to disassemble, repair or modify the product in any way. This will void the product warranty.

In the Box

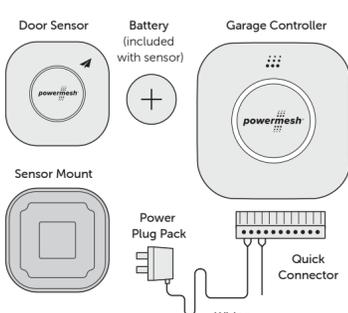

Garage Controller




Powermesh Indicator

- BLUE** Device is operational and ready to be set up on a network. Choose 'Add New Device' in Zimi to finish setting it up.
- WHITE** Device has been set up on a network and is operational. To set up on a different network, simply RESET the device.
- RED** Device has a critical fault, try updating the firmware. If unsuccessful, the unit will have to be replaced.
- OFF** Please check the unit has power. If the unit is not working, it will need to be returned. If the unit is operational, please check that the indicator hasn't been disabled in 'device settings'.


1 Activate the Sensor Battery

- Unscrew the back cover.
- Remove the battery pull tab.
- Screw the back cover on.

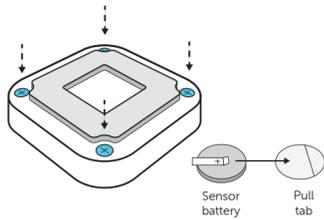


2 Stick the Sensor to your door

- Clean the surface for best adhesion.
- Peel off the adhesive backing.
- Stick on the sensor.

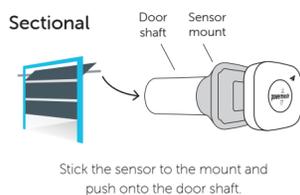


Roller

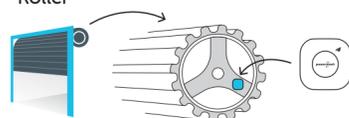

Stick to the spoke, on the end without the motor.


Tilt

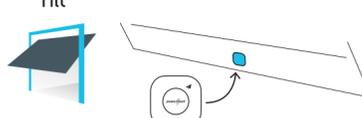

Stick to the inside bottom of the door.


3 Connect the wiring

- Connect the wires to the 'Bell / Push button terminals' on your motor, refer to the motor manual if unsure.
- If using PE safety beams, wire to the P terminals.

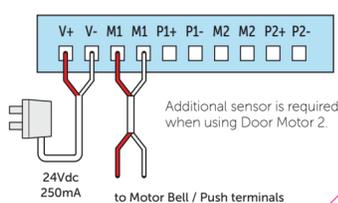

4 Mount the Controller

- Plug the quick connector in to the controller.
- Peel off the adhesive backing.
- Firmly press the controller to the ceiling.

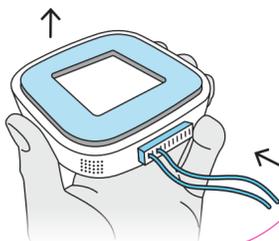

5 Pair with Zimi

- Download the Zimi app and log in.
- Choose 'Add New Device'.
- Stand near the controller and Zimi will find it.
- Follow the onscreen instructions to finish setup.



App Download
Point your phone camera at the QR code to open the app store.



6 Have you got a Zimi Cloud Connect?

Voice control your garage door with your favourite voice assistant.

- Put your Zimi Cloud Connect in a room near your garage, within range of your Wi-Fi router.
- Follow the included setup instructions.



Need help?

Visit the Zimi support site to get help with your powermesh products. support.zimi.life



Scan the QR code with your phone.

Powermesh Video Channel

Learn more about Powermesh products or search YouTube for Powermesh.



Warranty & Terms

Powermesh Garage Door Controller & Sensor

Statutory Rights.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Warranty.

GSM Innovations Pty Ltd provides this defects Warranty in addition to the other rights and remedies available to you under a law in relation to the Products. Nothing in this Warranty limits your rights and remedies under the Australian Consumer Law. In particular, any warranty periods in this Warranty do not vary or limit the period of time in which you may be entitled to remedies under the Australian Consumer Law if the Products are supplied in breach of consumer guarantees under the Australian Consumer Law.

What is covered under this Warranty.

- 1 Subject to the terms of this Warranty, if there is a defect in components or workmanship of a Products within a period of one (1) year from the original date of purchase, the manufacturer will repair or replace the Products free of charge or refund you the cost of the Products. No additional warranty period will apply for Products repaired or replaced by the manufacturer free of charge beyond this one (1) year warranty period. 2 If a defect is not covered by this Warranty and we repair or replace Products and charge you for this work, and there is a defect in components or workmanship within a period of three (3) months from the date the

work is carried out, subject to the terms of this Warranty, the manufacturer will repair or replace the work carried out free of charge or refund you the cost of the repair or replacement. 3 Goods presented for repair may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods.

Warranty Conditions.

- 1 This Warranty only applies to the original purchaser of the Products purchased in Australia. This Warranty cannot be transferred to a new owner. 2 The Products are designed only for use in a single-family dwelling. This Warranty does not apply if you use the Products in other residential premises or commercial or industrial premises. 3 It is a condition of this Warranty that the Products must be installed and maintained in accordance with the instructions supplied with the Products. 4 If the Products are purchased online from an online reseller, the manufacturer accepts no responsibility for determining the suitability of the Products for your intended use and accepts no responsibility for unauthorised installation.

Making a claim under this Warranty and expenses for making a claim.

You must comply with all the following steps to make a claim under this Warranty. If you suspect Products may be defective, and you wish to make a claim under this Warranty, during the warranty period you must contact the retailer that you purchased the Products from or contact our technical support team (on the contact details below) and they will work to diagnose the issue and arrange for your defects claim to be assessed. You must provide a sales docket or invoice or other proof of

purchase to demonstrate the original date of purchase, or where relevant, to demonstrate the date of repair or replacement, and provide details of the model and serial number. You must return the Products to us in original or suitably secure packaging. We do not cover the cost of on-site attendance to inspect or de-install the Products or to re-install the Products. You will be responsible for transportation costs associated with returning the Products to us, unless we have agreed alternative arrangements with you. We will be responsible for transportation costs associated with sending you the repaired or replacement Products, unless your claim is invalid. If there is no defect in the Products or your claim is otherwise invalid, the following applies. We may charge you a fee for the assessment of the Products, and where relevant, a fee for attending your premises to inspect the Products and the cost of transporting the Products back to you. If your claim is invalid and there is a failure in the Products, we will also tell you the cost of any recommended repairs or replacement and ask you whether you would like us to repair or replace the Products at that price.

What is not cover under this Warranty

This Warranty does not cover batteries, fuses, transmitter and receiver range, labour and travel for attendance at your premises. This Warranty will not cover any Products failure or defect to the extent it has been caused by any of the following: 1 non-conformity with the instructions concerning installation, maintenance, operation and testing of the Products; 2 modification, adjustment or repairs of the Products by anyone other than authorised persons; 3 problems relating to the garage door opener or garage door hardware or other goods with which the Products are intended to be used including springs, rollers, hinges, door alignment or other issues

associated with lack of proper maintenance of garage door opener or hardware by a professional garage door technician; 4 normal wear and tear; 5 corrosion or electrical malfunction caused by exposure to water damage or condensation in excess of the Products' water resistance rating; 6 corrosion or problems due to installation within 800m of the sea or body of water of equivalent or greater salt concentration; 7 electrical storms, power strikes, power surges, incorrect power current, fire, excess water exposure, flood, rain or other acts of God; 8 problems caused by blown fuses or replacement of batteries; 9 damage caused by insects or pests; 10 damage caused by malware or viruses; 11 radio or electrical interference; 12 and misuse, tampering, neglect, abuse, accidents or damage beyond the manufacturer's reasonable control. The garage door hardware, opener and other goods, with which the Products are intended to be used must be properly installed, operational and serviced so that they operate properly with the Products. The garage door may not open, close and stop in accordance with the expected transmissions of messages. Where such issues occur, because of problems with the garage door hardware, opener or other goods, this is not a Product defect but a problem with the garage door hardware, opener or other goods.

Our Liability

To the maximum extent permitted by law, we exclude all warranties, conditions and guarantees relating to the Products and our repair services in connection with the Products, which are not provided under Australian Consumer Law for under any other law or regulation in Australia, which cannot be excluded by law) or which are not set out in this Warranty or any other terms and conditions between you and the manufacturer. Without limiting our liability under Australian Consumer Law or any

other liability which cannot be excluded or limited under any other law or regulation in Australia, our liability in connection with the Products and our repair services in connection with the Products is limited to the remedies set out in this Warranty, and if we do not comply with these remedies the price charged for the Products, or for a repair or replacement the price charged for the repair or replacement.



14 Millennium Circuit, Helensvale, Queensland 4212 Australia. www.zimi.life



1 Important - Read before installing.

⚠️ Must only be installed by a LICENSED ELECTRICIAN to local wiring regulations. Failure to follow these instructions can result in serious injury or death.

This is a semiconductor switching device, the mains power MUST BE SWITCHED OFF before performing any wiring or maintenance work.

⚠️ **AVOID THE RISK OF ELECTRIC SHOCK**
Once the product has been fastened to the wall, ensure the supplied screw caps are placed firmly into the screw mounting holes.

Factory Reset.
Remove the cover and press the RESET button until the Powermesh indicator flashes blue. Release the button and when the indicator turns blue, it's ready to pair.

2 Specifications

Part Number: **PMLD, PMLDBK**

Line Voltage Frequency: **50Hz Nominal**

Load Brightness Control Range: **1% to > 95% (load dependent)**

Rated Load: **Maximum Load 1A @ 250V / 250W**

Minimum Load: **2W**

Due to the variety of LED lamps / transformers / CFLs, the maximum load and performance will be specific to the product make and model.

Compatible load types

- Dimmable LED Drivers & Lamps
- Electronic transformers
- Standard iron core & toroidal transformers
- Incandescent
- Dimmable CFLs

⚠️ Powermesh products must only be connected with the **Active and Neutral from the same RCD.**

⚠️ **Surge protection is recommended** at the main switchboard. Products that are damaged by power surges are not covered by warranty.

3 Using the Light Dimmer.

Light Dimming Button with mini brightness indicator.

- Press x 1 - on / off.
- Press & hold to dim.
- Press x 2 - full brightness
- Press x 3 - timed fade to off.

Powermesh Status Indicator
See overleaf for the meaning of each colour status.

Reset Button

MAC ID
Unique product serial number.

Mounting screws Snap on cover

⚠️ Set device Min & Max dimming levels in Zimi 'Settings' to avoid flicker if necessary.

4 Choose your wiring installation.

2 Wire without Neutral

3 Wire with Neutral

Set the switch positions as shown.

5 Two Way Switching

2 Wire without Neutral

Set the switch positions as shown.

6 Two Way Switching

3 Wire with Neutral

⚠️ For multi-way switching only use multiple Powermesh Light Dimmer switches with master & slave configurations. Never wire with normal switches for multi-way switching.

7 Three Way Switching

Set the switch positions as shown.

⚠️ Always use a Neutral wire where possible for best performance. Set the Neutral / No Neutral and Master / Slave switches as shown for '3 Wire with Neutral'.

8 Pair and setup with Zimi.

zimi

- Download the Zimi App.
- Choose 'Add Device'.
- Follow the on screen instructions.

Zimi App Download
Point your phone camera at the QR code to open the app store.

Download on the **App Store**
GET IT ON **Google Play**

9 Zimi Cloud Connect.

Enjoy the full experience with all your Powermesh devices.

works with **Hey Google**

WORKS WITH **ALEXA**

Remote access anywhere.

Voice control hands free.

Energy history over time.

Requires Wi-Fi with Internet connection.

10 Want to learn more or need help?

Enjoy all the features and make your life easier. Visit our website for tips, tricks and help.

support.zimi.life

- Behaviour Link**
Control a switch from another switch.
- Schedules**
Turn it on and off any day or time.
- Energy Use**
Monitor the power usage and cost.
- Auto off Timer**
Turn it off automatically.

11 Powermesh Status Indicator

- Blue** **Ready to pair.**
'Add device' in Zimi to pair and complete setup.
- White** **Setup is complete.**
This device has been paired and setup completed.
- White pulsing** **Action in progress.**
This lets you know an automatic function is being activated.
- Blue & White pulsing** **Identify device.**
This shows the device when updating its settings.
- Red** **Device problem.**
Please refer to support to resolve the problem.
- Off** **Device working.**
If the device is working, the indicator has been 'turned off' in device settings.

Manufacturer's Warranty This product has been manufactured to the highest quality standards. This product is warranted to the original purchaser and is not transferable. The product is guaranteed to be free from defects in workmanship and parts for a period of 1 Year from the date of purchase. Defects that occur within this warranty period, under normal use and care will be repaired, replaced or refunded. The benefits conferred by this warranty are in addition to all other rights and remedies of the consumer under a Commonwealth, State and Territory laws in relation to the goods or services to which this warranty relates and Australian Consumer Law. Risk in regard to the product to be repaired shall at all times remain with the Purchaser. The warranty is given on the condition that the product to which it applies is used for the purpose and in the manner intended by its construction and for no other purposes whatsoever. GSM Innovations Pty Ltd shall not be responsible for damage of any kind, caused by accidents, power surges, electrical storm damage, incorrect power current, infestation (vermin or insect), incorrect installation, incorrect electricity or plumbing installation, improper use of controls or failure to use the unit in accordance with the operating instructions, general misuse or abuse or from normal wear and tear. Any attempt by an unauthorised person to repair or tamper with the equipment shall render the warranty null and void. Goods presented for repair under this warranty may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. GSM Innovations Pty Ltd's liability under this warranty is limited to the replacement and/or repair of the defective parts within the warranty period and does not extend to installation or removal of the product. Acceptance of liability by GSM Innovation Pty Ltd contained herein is to the exclusion of any other remedy whatsoever and howsoever arising in respect of any equipment to which it applies.

Proof of Purchase Please keep your purchase docket or receipt as proof of purchase and as proof of the date on which the purchase was made. The purchase docket or receipt must be presented with the warranty when making a claim under this warranty. Failure to produce documentary proof of the date of original acquisition by the original Purchaser will result in a charge being levied for work done, labour and parts supplied. Likewise a charge will be made for any calls following warranty claim where no fault is found with the unit.

Service during the warranty period The first point of contact for product issues is the place of purchase. The product must be returned to the original place of purchase for product repair, replacement or refund. Please ensure the product is properly packaged so as to ensure that no damage occurs to the product during transit and make sure that you have included an explanation of the problem. In the event of goods requiring repair under manufacturer's warranty the owner is responsible for the cost of transportation. Should the goods be found to be in sound working order the owner might be charged a fee. This warranty is given by GSM Innovations Pty Ltd, 14 Millennium Circuit, Helensvale, QLD 4212.

Safety Warnings Read all instructions and safety information. All electrical work must only be undertaken after disconnection of the power by removing fuses or turning off the circuit breaker, to ensure all pole disconnection from the electrical supply. All electrical work must be carried out by a licensed and qualified electrician and in accordance to AS/NZS 3000 Wiring Rules and applicable

local authority regulations. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for their safety. Young children should be supervised to ensure that they do not play with the unit. Do not cut or notch joists, beams and rafters to install the unit. Do not damage hidden electrical wiring or utilities when cutting. The product must be installed so that switches and other controls cannot be touched by a person in the bath or shower. Do not install the product in a location where water will splash onto it. Check and confirm that all connections are proper and secure to prevent causing property damages or injury. Do not install outdoors where it could be exposed to water or moisture (indoor use only).

Trademarks Zimi and Powermesh and their respective logos are registered trademarks of GSM Innovations Pty Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries.

Copyright © 2021 GSM Innovations Pty Ltd. All rights reserved.

zimi
14 Millennium Circuit
Helensvale QLD 4212
Australia
www.zimi.life

powermesh



Let's get connected.

Multi Dimmer Switch 2 and 4 button



7 Multi-way Switching with Behaviour Link.

The 'Behaviour Link' feature makes multi-way switching easy. Any button **without a load** can be linked to a button **with a load**. Use the Zimi app to create a new 'Behaviour Link' or change the link later.

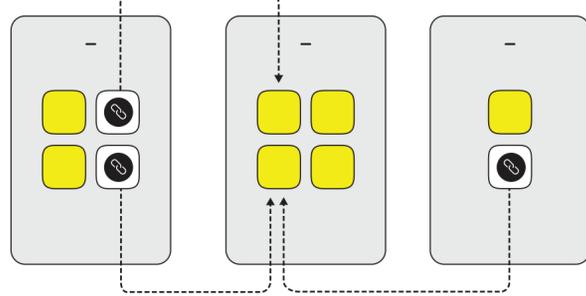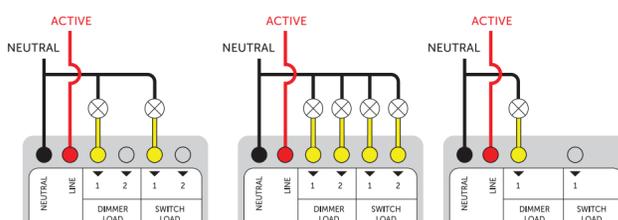

Multi-way switching.
The POWERMESH Multi Purpose Switch SHOULD NOT be wired with any other type of switches.

8 Zimi Cloud Connect.

Enjoy the full experience with all your Zimi devices.



Internet connection required.

9 Want to learn more or need help?

Enjoy all the features to make your life easier. Visit our website for tips, tricks and help.

support.zimi.life

- Behaviour Link**
Control a switch from another switch.
- Schedules**
Turn it on and off any day or time.
- Energy Use**
Monitor the power usage and cost.
- Auto Off Timer**
Turn it off automatically.

10 Status Indicator.

- Blue** **Ready to pair.**
Add device' in Zimi to pair and complete setup.
- White** **Setup is complete.**
This device has been paired and setup completed.
- White pulsing** **Action in progress.**
This lets you know an automatic function is being activated.
- Blue & White pulsing** **Identify device.**
This shows the device when updating its settings.
- Red** **Device problem.**
Please refer to support to resolve the problem.
- Off** **Indicator is off.**
The status indicator can be turned off and on in settings.

Manufacturer's Warranty This product has been manufactured to the highest quality standards. This product is warranted to the original purchaser and is not transferable. The product is guaranteed to be free from defects in workmanship and parts for a period of 1 Year from the date of purchase. Defects that occur within this warranty period, under normal use and care will be repaired, replaced or refunded. The benefits conferred by this warranty are in addition to all other rights and remedies of the consumer under a Commonwealth, State and Territory laws in relation to the goods or services to which this warranty relates and Australian Consumer Law. Risk in regard to the product to be repaired shall at all times remain with the Purchaser. The warranty is given on the condition that the product to which it applies is used for the purpose and in the manner intended by its construction and for no other purposes whatsoever. Zimi Ltd shall not be responsible for damage of any kind, caused by accidents, power surges, electrical storm damage, incorrect power current, infestation (vermin or insect), incorrect installation, incorrect electricity or plumbing installation, improper use of controls or failure to use the unit in accordance with the operating instructions, general misuse or abuse or from normal wear and tear. Any attempt by an unauthorised person to repair or tamper with the equipment shall render the warranty null and void. Goods presented for repair under this warranty may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. Zimi Ltd's liability under this warranty is limited to the replacement and/or repair of the defective parts within the warranty period and does not extend to installation or removal of the product. Acceptance of liability by Zimi Ltd contained herein is to the exclusion of any other remedy whatsoever and howsoever arising in respect of any equipment to which it applies.

Proof of Purchase Please keep your purchase docket or receipt as proof of purchase and as proof of the date on which the purchase was made. The purchase docket or receipt must be presented with the warranty when making a claim under this warranty. Failure to produce documentary proof of the date of original acquisition by the original Purchaser will result in a charge being levied for work done, labour and parts supplied. Likewise a charge will be made for any calls following warranty claim where no fault is found with the unit.

Service during the warranty period The first point of contact for product issues is the place of purchase. The product must be returned to the original place of purchase for product repair, replacement or refund. Please ensure the product is properly packaged so as to ensure that no damage occurs to the product during transit and make sure that you have included an explanation of the problem. In the event of goods requiring repair under manufacturer's warranty the owner is responsible for the cost of transportation. Should the goods be found to be in sound working order the owner might be charged a fee. This warranty is given by Zimi Ltd, 14 Millennium Circuit, Helensvale, QLD 4212.

Safety Warnings Read all instructions and safety information. All electrical work must only be undertaken after disconnection of the power by removing fuses or turning off the circuit breaker, to ensure all pole disconnection from the electrical supply. All electrical work must be carried out by a licensed and qualified electrician and in accordance to AS/NZS 3000 Wiring Rules and applicable local authority regulations. This product is not intended for use by persons (including children) with reduced physical, sensory or mental

capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for their safety. Young children should be supervised to ensure that they do not play with the unit. Do not cut or notch joists, beams and rafters to install the unit. Do not damage hidden electrical wiring or utilities when cutting. The product must be installed so that switches and other controls cannot be touched by a person in the bath or shower. Do not install the product in a location where water will splash onto it. Check and confirm that all connections are proper and secure to prevent causing property damages or injury. Do not install outdoor where it could be exposed to water or moisture (indoor use only).

Trademarks Zimi and Powermesh and their respective logos are registered trademarks of Zimi Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries.


Copyright © 2022 Zimi Ltd. All rights reserved.




1 Important - Read before installing.

- DIY** Must only be installed by a LICENSED ELECTRICIAN to local wiring regulations.
- Failure to follow these instructions can result in serious injury or death.
- Powermesh devices must only be connected with the Active and Neutral from the same RCD.
- Megger testing may lead to low readings due to electronic components so disconnect all electronic devices before taking a reading. Install the included warning sticker with circuit detail in the main electrical switchboard.
- Surge protection is recommended at the main switchboard. Products damaged by power surges are not covered by warranty.
- AVOID THE RISK OF ELECTRIC SHOCK**
Once the product has been fastened to the wall, ensure the screw caps are inserted firmly into place over the screw mounting hole locations as shown below.
- Set device Min & Max dimming levels in the Zimi App 'Settings' for low and high brightness.

2 Using the Multi Dimmer Switch.

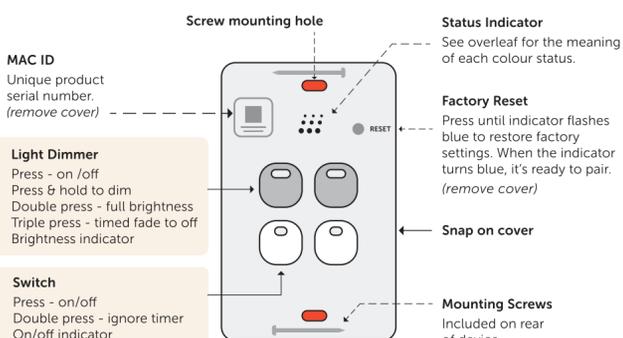


3 Identifying the Dimmers and Switches.

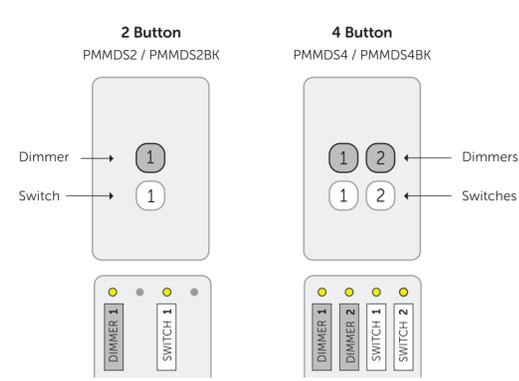

4 Compatible Load & Types

2 Button		4 Button	
DIMMER	SWITCH	2 CHANNEL DIMMER	2 CHANNEL SWITCH
250W	250W	250W	250W
100W	5A	100W	5A
X	2AX	X	2AX
X	2A	X	2A
X	M.20	X	M.20
230V~ 50Hz		MAX 10A TOTAL, 230V~ 50Hz	

5 Connect the wiring.

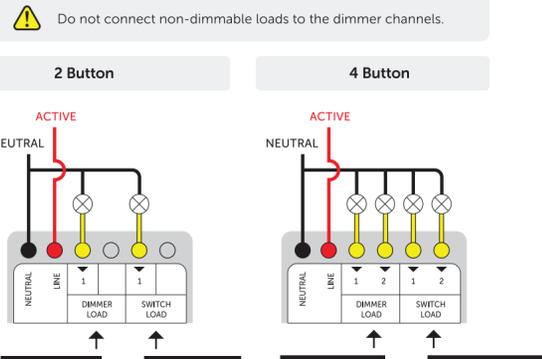

6 Pair and setup with Zimi.

zimi

- Download the Zimi App.
- Choose 'Add Device'.
- Follow the on screen instructions.

Download Zimi App. Point your phone camera at the QR code to open the app store.



1 Important - Read before installing.

Must only be installed by a LICENSED ELECTRICIAN to local wiring regulations.

Failure to follow these instructions can result in serious injury or death.

Screw mounting holes

Factory Reset

Remove the cover and press the RESET button until the Powermesh indicator flashes blue. Release the button and when the indicator turns blue, it's ready to pair.

AVOID THE RISK OF ELECTRIC SHOCK

Once the product has been fastened to the wall, ensure the supplied screw caps are inserted firmly into the screw mounting holes.

2 Using the Power Point.

Powermesh Status Indicator
See overleaf for the meaning of each colour status.

Reset Button

Power Switch
Single press on / off with indicator.

Power Socket
Each socket can be controlled independently.

Snap on cover

Mounting screws

MAC ID
Unique product serial number.

3 Connect the wiring.

Surge protection is recommended at the main switchboard. Products damaged by power surges are not covered by warranty.

Specifications

Part Number: **PMPP / PMPPBK**

Line Voltage Frequency: **50Hz Nominal**

Rated Load:
Maximum Load 10A @ 250V / 2500W

4 Pair and setup with Zimi.

- Download the Zimi App.
- Choose 'Add Device'.
- Follow the on screen instructions.

Zimi App Download

Point your phone camera at the QR code to open the app store.

Download on the **App Store**

GET IT ON **Google Play**

5 Zimi Cloud Connect.

Enjoy the full experience with all your Powermesh devices.

works with

WORKS WITH

Remote access anywhere.

Voice control hands free.

Energy history over time.

Requires Wi-Fi with Internet connection.

6 Want to learn more or need help?

Enjoy all the features to make your life easier. Visit our website for tips, tricks and help.

support.zimi.life

Power Lock

Prevent power use at the switch.

Schedules

Turn it on and off any day or time.

Energy Use

Monitor the power usage and cost.

Auto off Timer

Turn it off automatically.

7 Powermesh Status Indicator.

	Blue	Ready to pair. 'Add device' in Zimi to pair and complete setup.
	White	Setup is complete. This device has been paired and setup completed.
	White pulsing	Action in progress. This lets you know an automatic function is being activated.
	Blue & White pulsing	Identify device. This shows the device when updating its settings.
	Green pulsing	Energy alert. This shows the device is using high power.
	Red	Device problem. Please refer to support to resolve the problem.
	Off	If the device is working, the indicator has been 'turned off' in device settings.

Manufacturer's Warranty This product has been manufactured to the highest quality standards. This product is warranted to the original purchaser and is not transferable. The product is guaranteed to be free from defects in workmanship and parts for a period of 1 Year from the date of purchase. Defects that occur within this warranty period, under normal use and care will be repaired, replaced or refunded. The benefits conferred by this warranty are in addition to all other rights and remedies of the consumer under a Commonwealth, State and Territory laws in relation to the goods or services to which this warranty relates and Australian Consumer Law. Risk in regard to the product to be repaired shall at all times remain with the Purchaser. The warranty is given on the condition that the product to which it applies is used for the purpose and in the manner intended by its construction and for no other purposes whatsoever. GSM Innovations Pty Ltd shall not be responsible for damage of any kind, caused by accidents, power surges, electrical storm damage, incorrect power current, infestation (vermin or insect), incorrect installation, incorrect electricity or plumbing installation, improper use of controls or failure to use the unit in accordance with the operating instructions, general misuse or abuse or from normal wear and tear. Any attempt by an unauthorised person to repair or tamper with the equipment shall render the warranty null and void. Goods presented for repair under this warranty may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. GSM Innovations Pty Ltd's liability under this warranty is limited to the replacement and/or repair of the defective parts within the warranty period and does not extend to installation or removal of the product. Acceptance of liability by GSM Innovation Pty Ltd contained herein is to the exclusion of any other remedy whatsoever and howsoever arising in respect of any equipment to which it applies.

Proof of Purchase Please keep your purchase docket or receipt as proof of purchase and as proof of the date on which the purchase was made. The purchase docket or receipt must be presented with the warranty when making a claim under this warranty. Failure to produce documentary proof of the date of original acquisition by the original Purchaser will result in a charge being levied for work done, labour and parts supplied. Likewise a charge will be made for any calls following warranty claim where no fault is found with the unit.

Service during the warranty period The first point of contact for product issues is the place of purchase. The product must be returned to the original place of purchase for product repair, replacement or refund. Please ensure the product is properly packaged so as to ensure that no damage occurs to the product during transit and make sure that you have included an explanation of the problem. In the event of goods requiring repair under manufacturer's warranty the owner is responsible for the cost of transportation. Should the goods be found to be in sound working order the owner might be charged a fee. This warranty is given by GSM Innovations Pty Ltd, 14 Millennium Circuit, Helensvale, QLD 4212.


Safety Warnings Read all instructions and safety information. All electrical work must only be undertaken after disconnection of the power by removing fuses or turning off the circuit breaker, to ensure all pole disconnection from the electrical supply. All electrical work must be carried out by a licensed and qualified electrician and in accordance to AS/NZS 3000 Wiring Rules and applicable

local authority regulations. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for their safety. Young children should be supervised to ensure that they do not play with the unit. Do not cut or notch joists, beams and rafters to install the unit. Do not damage hidden electrical wiring or utilities when cutting. The product must be installed so that switches and other controls cannot be touched by a person in the bath or shower. Do not install the product in a location where water will splash onto it. Check and confirm that all connections are proper and secure to prevent causing property damages or injury. Do not install outdoor where it could be exposed to water or moisture (indoor use only).

Trademarks Zimi and Powermesh and their respective logos are registered trademarks of GSM Innovations Pty Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries.

Copyright © 2021 GSM Innovations Pty Ltd. All rights reserved.

14 Millennium Circuit
Helensvale QLD 4212
Australia.
www.zimi.life

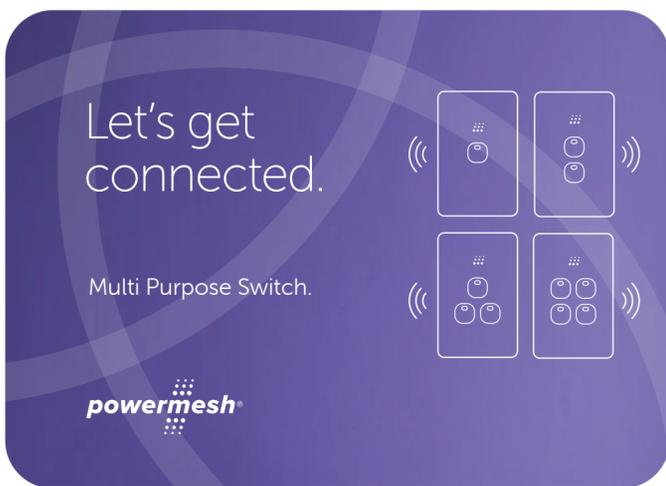

1 Important - Read before installing.



Must only be installed by a LICENSED ELECTRICIAN to local wiring regulations.



Failure to follow these instructions can result in serious injury or death.



Powermesh devices must only be connected with the Active and Neutral from the same RCD.




Surge protection is recommended at the main switchboard. Products damaged by power surges are not covered by warranty.




Megger testing may lead to low readings due to electronic components so disconnect all electronic devices before taking reading. Install the included warning sticker with circuit detail in the main electrical switch board.

2 Using the Multi Purpose Switch.

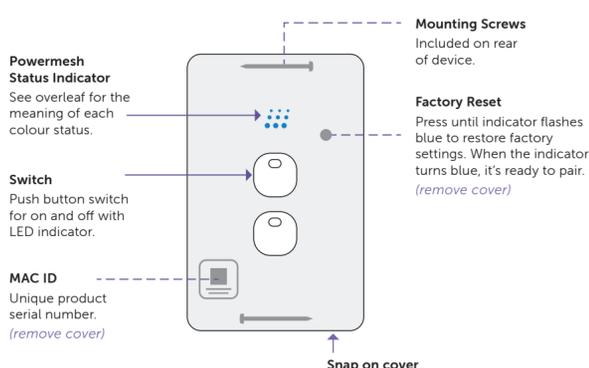


3 Identifying the switches.

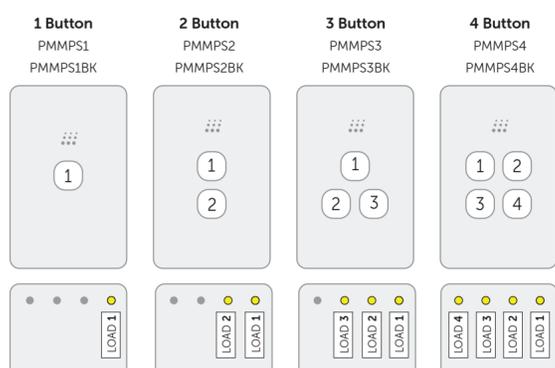

4 Technical specifications.

Compatible load types		Rated Loads	
	LED	Mode	☐
	Incandescent		☐ ○
	Fluorescent		☐ ○ ○
	CFLs		☐ ○ ○ ○
	Electronic transformers	3 Wire with Neutral	5AX max
	Standard iron core & toroidal transformers		5AX max per channel, 10AX total max load
	Exhaust fans / small motors	2 Wire without Neutral	5A max
			5AX max per channel, channel 1 is 5A only.
			See note below.

5 2 or 3 Wire Mode with Auto-Sensing.

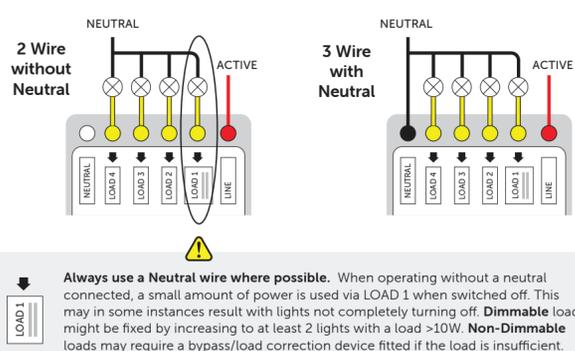

Always use a Neutral wire where possible. When operating without a neutral connected, a small amount of power is used via LOAD 1 when switched off. This may in some instances result with lights not completely turning off. Dimmable loads might be fixed by increasing to at least 2 lights with a load >10W. Non-Dimmable loads may require a bypass/load correction device fitted if the load is insufficient.

6 Pair and setup with Zimi.



- Download the Zimi App.
- Choose 'Add Device'.
- Follow the on screen instructions.




Zimi App Download

Point your phone camera at the QR code to open the app store.



7 Multi-way Switching with Behaviour Link.

The 'Behaviour link' feature makes multi-way switching easy. Buttons turn off and on together when either one is pressed. Any button without load can be linked to a button with a load.

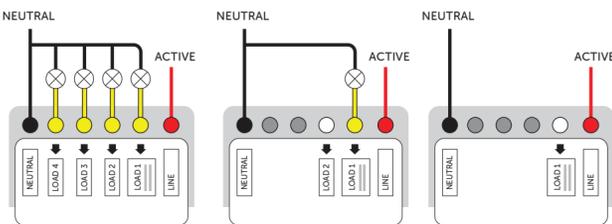

'Behaviour link' buttons with the Zimi app. This can be changed at any time.

Multi-way switching. The Powermesh Multi Purpose Switch SHOULD NOT be wired with any other type of switches.

8 Zimi Cloud Connect.

Enjoy the full experience with all your Powermesh devices.



Remote access anywhere.



Voice control hands free.



Energy history over time.

Requires Wi-Fi with Internet connection.

9 Want to learn more or need help?

Enjoy all the features to make your life easier. Visit our website for tips, tricks and help.

support.zimi.life



Behaviour Link
Control a switch from another switch.



Schedules
Turn it on and off any day or time.



Energy Use
Monitor the power usage and cost.



Auto off Timer
Turn it off automatically.

10 Powermesh Status Indicator.

	Blue	Ready to pair. 'Add device' in Zimi to pair and complete setup.
	White	Setup is complete. This device has been paired and setup completed.
	White pulsing	Action in progress. This lets you know an automatic function is being activated.
	Blue & White pulsing	Identify device. This shows the device when updating its settings.
	Red	Device problem. Please refer to support to resolve the problem.
	Off	If the device is working, the indicator has been 'turned off' in device settings.

Manufacturer's Warranty This product has been manufactured to the highest quality standards. This product is warranted to the original purchaser and is not transferable. The product is guaranteed to be free from defects in workmanship and parts for a period of 1 Year from the date of purchase. Defects that occur within this warranty period, under normal use and care will be repaired, replaced or refunded. The benefits conferred by this warranty are in addition to all other rights and remedies of the consumer under a Commonwealth, State and Territory laws in relation to the goods or services to which this warranty relates and Australian Consumer Law. Risk in regard to the product to be repaired shall at all times remain with the Purchaser. The warranty is given on the condition that the product to which it applies is used for the purpose and in the manner intended by its construction and for no other purposes whatsoever. GSM Innovations Pty Ltd shall not be responsible for damage of any kind, caused by accidents, power surges, electrical storm damage, incorrect power current, infestation (termite or insect), incorrect installation, incorrect electricity or plumbing installation, improper use of controls or failure to use the unit in accordance with the operating instructions, general misuse or abuse or from normal wear and tear. Any attempt by an unauthorised person to repair or tamper with the equipment shall render the warranty null and void. Goods presented for repair under this warranty may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. GSM Innovations Pty Ltd's liability under this warranty is limited to the replacement and/or repair of the defective parts within the warranty period and does not extend to installation or removal of the product. Acceptance of liability by GSM Innovation Pty Ltd contained herein is to the exclusion of any other remedy whatsoever and howsoever arising in respect of any equipment to which it applies.

Proof of Purchase Please keep your purchase docket or receipt as proof of purchase and as proof of the date on which the purchase was made. The purchase docket or receipt must be presented with the warranty when making a claim under this warranty. Failure to produce documentary proof of the date of original acquisition by the original Purchaser will result in a charge being levied for work done, labour and parts supplied. Likewise a charge will be made for any calls following warranty claim where no fault is found with the unit.

Service during the warranty period The first point of contact for product issues is the place of purchase. The product must be returned to the original place of purchase for product repair, replacement or refund. Please ensure the product is properly packaged so as to ensure that no damage occurs to the product during transit and make sure that you have included an explanation of the problem. In the event of goods requiring repair under manufacturer's warranty the owner is responsible for the cost of transportation. Should the goods be found to be in sound working order the owner might be charged a fee. This warranty is given by GSM Innovations Pty Ltd, 14 Millennium Circuit, Helensvale, QLD 4212

Safety Warnings Read all instructions and safety information. All electrical work must only be undertaken after disconnection of the power by removing fuses or turning off the circuit breaker, to ensure all pole disconnection from the electrical supply. All electrical work must be carried out by a licensed and qualified electrician and in accordance to AS/NZS 3000 Wiring Rules and applicable

local authority regulations. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for their safety. Young children should be supervised to ensure that they do not play with the unit. Do not cut or notch joists, beams and rafters to install the unit. Do not damage hidden electrical wiring or utilities when cutting. The product must be installed so that switches and other controls cannot be touched by a person in the bath or shower. Do not install the product in a location where water will splash onto it. Check and confirm that all connections are proper and secure to prevent causing property damages or injury. Do not install outdoor where it could be exposed to water or moisture (indoor use only).

Trademarks Zimi and Powermesh and their respective logos are registered trademarks of GSM Innovations Pty Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries.

Copyright © 2021 GSM Innovations Pty Ltd. All rights reserved.



14 Millennium Circuit
Helensvale QLD 4212
Australia.
www.zimi.life

