

BOULEVARD LED SLIMLINE FLOODLIGHT

Features


- Installation: Undermount surface bracket
- Contemporary industrial slimline designer outlook
- Lumen efficacy: 90lm per Watt
- High performance polished multifaceted reflector
- Spot frost low glare tempered glass
- Beam angle: 110°
- Average lifetime of 40 000 hours
- Power factor: >0.9

Specifications

Body and Reflector: Aluminium
 Diffuser: Tempered Glass
 Gear Tray: Galvanised Steel
 Cable Gland: Steel IP66 rated
 Rubber Flex: 0.6M
 Light Category: LED
 LED Type: SMD 2820
 Input Voltage: 220—240Vac 50/60Hz
 LED Driver: Constant Current
 Driver Type: Non Dimmable
 Operating Temperature: -10°C—50°C
 Operating humidity: 0-95%
 Ingress Protection: IP65

Application

Ideal for temporary and/or permanent lighting in domestic, commercial and moderate industrial areas

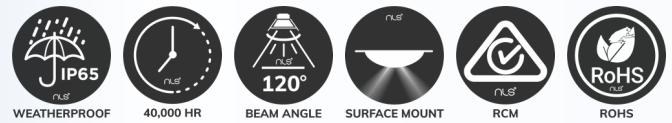

Code	Wattage	Lumens	mA	Weight	Bracket	Height	Width	Depth
20372NLS	20W	1800lm	600mA	0.7KG	84mm	179mm	138mm	35mm
20373NLS	30W	2700lm	900mA	0.98KG	87.5mm	223mm	184mm	46mm
20374NLS	50W	4500lm	1400mA	1.23KG	105mm	283mm	237mm	59mm
20375NLS	70W	6400lm	1400mA	2.3KG	235mm	345mm	295mm	63mm
20376NLS	100W	9000lm	1400mA	2.4KG	235mm	345mm	295mm	63mm
20377NLS	150W	13500lm	1400mA	2.6KG	235mm	345mm	295mm	63mm
20387NLS	200W	18000lm	1500mA	4.8KG	235mm	345mm	295mm	92mm
20388NLS	250W	22500lm	1500mA	5.65KG	235mm	345mm	295mm	92mm
20389NLS	300W	27000lm	1500mA	8.15KG	238.5mm	440mm	398mm	105mm
20390NLS	400W	36000lm	1600mA	12.3KG	290mm	568mm	498mm	116mm