

DATASHEET 41EPBCLM-VW

Iconic™ Smart Push-Button Remote Mechanism with LED indicator


Application

The Iconic Smart Push-Button Remote Mechanism with LED indicator is a three wire modular slave unit providing multiway dimming and switching control for Clipsal ControlLink enabled master devices. The Remote mech contains a smart LED indicator that will automatically track the status of the master unit. When used with Wiser Iconic units, it will automatically sync its LED settings as well, simplifying install. For use with all ControlLink enabled Iconic Push-Button devices, the Smart Push-Button Remote Mech is a simple way to provide seamless multiway control.




- Provides multiway dimming and switching via ControlLink using standard wiring.
- Smart LED indicator automatically tracks the status of the master unit
- Suitable for use with all Iconic ControlLink enabled Push-Button devices
- LED indicator setting syncs to Wiser enabled devices, and can be adjusted using Push-Button menu
- Supplied with Vivid White (VW) Push-Button assembly, additional colour options available as parts packs


Wiring Diagram

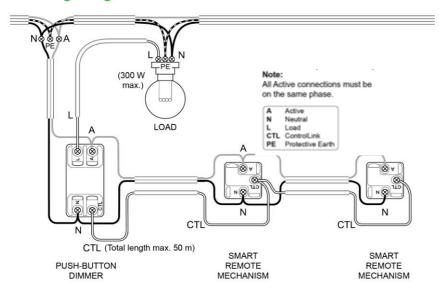



Dimensions





Specifications

Supply Voltage	220 to 240 V, 50 Hz	
Load	ControlLink communication only, no direct load control	
Standby Power	Does not exceed 0.1 W	
Wiring type	3 Wire (Active, Neutral and CTL (ControlLink)	
Connection Terminals	Screw type, square head & combination head (Suits: 3x1.5 mm² cable, Torque: 0.8 Nm)	
Max units per plate	6	
Multiway control	Yes, up to 5 way (i.e. using up to 4 x 41EPBCLM-VW per master unit)	
Max ControlLink cable length	50m total length of multiway circuit	
LED Indicator Options	Warm White, default mode: On 10% when load is off, ON full when load is ON. 4 configurable modes	
Compatible units	For use only with Iconic ControlLink enabled master devices (Not a momentary switch)	
Depth from plate	39mm, Suits standard and deep wall boxes	
Environmental status	Green Premium Product, (environmental profile available)	
Compliance	AS/NZS 60669.2.1, AS/NZS CISPR-15	
Temperature Ratings	0 to 45° C (0 to 60° C storage)	
Ambient Operating & Storage Humidity Range	5% to 90% relative humidity, non-condensing (Storage: 5% to 95% C RH non-condensing)	
Warranty	2 years	
Dimensions	22 H / 22 L / 41cm D	

Ordering Information

Catalogue Number Description

41EPBCLM-VW	Smart Push-Button Remote Mechanism with LED indicator
	(provided with VW Push button assembly)

Accessories

40APB-VW	PB Mech Colour Cap - Vivid White (pk 5)
40-APB-WY	PB Mech Colour Cap - Warm Grey (pk 5)
40-APB-CY	PB Mech Colour Cap - Cool Grey (pk 5)
40-APB-AN	PB Mech Colour Cap - Anthracite (pk 5)



40APB-VW

Schneider Electric (Australia) Pty Ltd Contact us: Clipsal.com/feedback

National Customer Care Enquiries: Tel 1300 2025 25 Fax 1300 2025 56 New Zealand National Customer Care Enquiries: Tel 0800 652 999 Fax 0800 101 152 Schneider Electric (Australia) Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

