

# MINI FLUSH PRESENCE DETECTOR, 360 DEGREES



Actual Size





Power Box



55-451

Description	Colour	Model
Mini Flush Mount Presence Detector	White	55-451

- Adjustable Time, Distance & Lux
- Omni-directional dual element sensor
- Cutout diameter: 33mm
- Polycarbonate construction
- Minimum load 10W

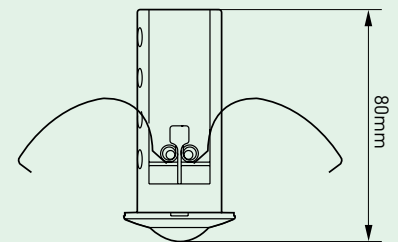

## TECHNICAL DATA

<b>Mounting</b>	Flush
<b>Sensor Type</b>	Passive IR
<b>Detection Range</b>	11m Diameter at a 2.5m Mounting Height
<b>Detection Angle</b>	360° Fixed
<b>Time on Adjustment</b>	1 sec to 15 mins
<b>Lux Setting (Lux)</b>	0 to 2000
<b>Load</b>	- 2000W max. for Incandescent Light - 1000W max. for Halogen Light - 600VA max. for Low Voltage Halogen Light - 900VA/100° µF for Fluorescent Light (CFL & PL Lamps) - 600VA (Max) 400W for Energy Saving CFL Lamp - 500VA/400W Max. for LED Lamp
<b>Voltage</b>	240V AC 50Hz
<b>Operating Temperature</b>	0°C to +45°C
<b>Environmental Protection</b>	IP40 Detector, IP20 Power Box

