




<https://www.wago.com/887-957>

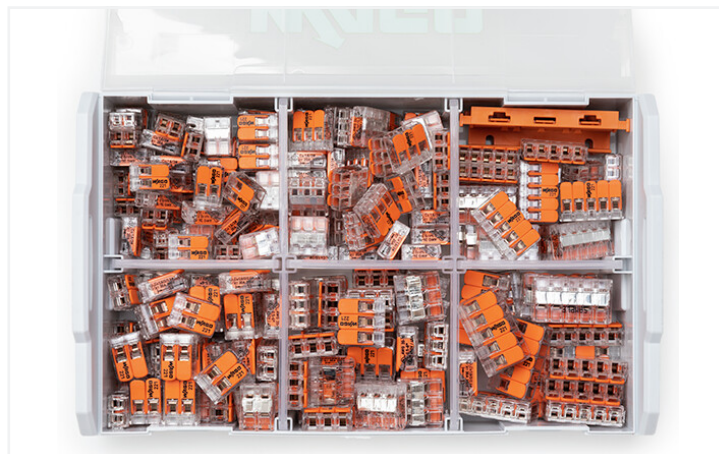

**This item includes:**

 <p><b>Item No.: 221-412</b>                  COMPACT Splicing Connector; for all conductor types; max. 4 mm<sup>2</sup>; 2-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm<sup>2</sup>; transparent</p>	 <p><b>Item No.: 221-413</b>                  COMPACT Splicing Connector; for all conductor types; max. 4 mm<sup>2</sup>; 3-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm<sup>2</sup>; transparent</p>	 <p><b>Item No.: 221-415</b>                  COMPACT Splicing Connector; for all conductor types; max. 4 mm<sup>2</sup>; 5-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm<sup>2</sup>; transparent</p>	 <p><b>Item No.: 221-500</b> 1                  Mounting carrier; 221 Series - 4 mm<sup>2</sup>; for DIN-35 rail mounting/screw mounting; orange</p>
 <p><b>Item No.: 221-612</b>                  COMPACT Splicing Connector; for all conductor types; max. 6 mm<sup>2</sup>; 2-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm<sup>2</sup>; transparent</p>	 <p><b>Item No.: 221-613</b>                  COMPACT Splicing Connector; for all conductor types; max. 6 mm<sup>2</sup>; 3-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm<sup>2</sup>; transparent</p>	 <p><b>Item No.: 221-615</b> 15                  COMPACT Splicing Connector; for all conductor types; max. 6 mm<sup>2</sup>; 5-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm<sup>2</sup>; transparent</p>	

**Physical data**

Width	260 mm / 10.236 inches
Height	63 mm / 2.48 inches
Depth	155 mm / 6.102 inches

**Material data**

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Fire load	15.129 MJ
Weight	996.2 g

Commercial data	
eCl@ss 10.0	27-14-11-04
eCl@ss 9.0	27-14-11-04
ETIM 8.0	EC000446
ETIM 7.0	EC000446
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143739160
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

## Downloads

### Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 887-957	

## Documentation

Additional Information		
Technical Section	pdf 2142.18 KB	