


AT6021

LED backlit panel - Low glare

- Easy-to-install flex and plug
- LED driver included
- Low-glare polycarbonate diffuser
- Long LED lifetime >60,000h L80B10
- Can be upgraded with phase-cut dimmable driver (not included)
- Can be upgraded with DALI-2 dimmable driver (not included)

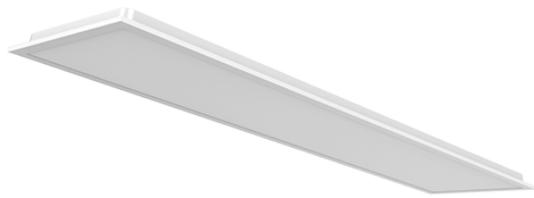

ORDERING INFORMATION

Order code	13346
Description	36W LED Backlit panel 300 X 1200 - Daylight
Driver Type	Fixed output
Item Code	AT6021/312/DL
Driver Power	40 W

EFFICIENCIES

Total System Efficiency	97 lm/W
--------------------------------	---------

The performance of each component of a luminaire is demonstrated through its efficiencies, which together determine the total system efficiency of the product. The output of the LED chip is first multiplied by the optical and thermal efficiencies to calculate the Luminaire efficiency. However, this calculation does not consider the driver efficiency. To determine the overall efficiency of the system, the Luminaire efficiency must be multiplied by the driver efficiency, which accounts for all losses in the system.

MECHANICAL

IP Rating	IP40
IC Rating	IC-4
IC-4 rating has been conducted at the products maximum working Temperature Range (C) in line with Australian standards. This provides the required safety when covered with insulation and used in Australian Environments.	
Adjustability	Fixed
Fitting Colour	White
Product Finish	Powdercoated
Body Material	Steel
Diffuser Material	Polycarbonate

Installation Type

Recessed

ELECTRICAL

Working Temp Range	-10 to 40 °C
Input Frequency	50 Hz
Switch Type	Inline
Power Factor	0.9
Maximum Wattage	36 W
Input voltage	230Vac

In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%

LAMP

Colour Rendering Index (CRI)	>80
Number of Lamps	1
UGR	<19
CCT Configuration	Single
Macadam Steps (SDCM)	3-step MacAdam Ellipse
Beam Angle	90 °
Lamp/LED voltage	36 V
Lamp/LED Current	900 mA

LED LIFETIME

LED Lifetime	>60,000 hrs	
This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected L _p (D _k) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.		
Ambient Temp (°C)	25 °C	40 °C
L90B10	52000 hrs	52000 hrs
This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.		
TM-21 Test Hours	10000 hrs	

COLOUR TEMPERATURE

CCT Colour	Daylight
Luminaire Lumens	3520 lm
All photometric data has a tolerance of $\pm 10\%$. Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.	

CCT	5700 K
------------	--------

DRIVER

Driver Type	Fixed output
Driver Included	Yes
Integrated Driver	No
Dimmable	No
Flex & Plug or Lead Length	900 mm
Wiring Type	Re-wireable Flex & Plug (2 pin)
Driver Mode	Constant Current

ENERGY SAVINGS SCHEME

Ipart Approval	Yes
REES Approval	Yes
VEU Approval	Yes

COMPLIANCE

Product Design Life	10 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	
Daily Use	12 hrs
The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.	
Standards	AS/NZS 60598.1 AS/NZS 60598.2.2 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15

WARRANTY


VIP Warranty	2 Onsite, 3 RTB (Total 5 Years)
VIP warranty is available to registered users and is subjected to additional terms and conditions.	
Operational Lifetime	50000 hrs
This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).	
Domestic Use Warranty	3 RTB (Total 3 Years)

DIMENSIONS

Product Height	34 mm
Product Length	1195 mm
Product Width	295 mm


LINE DRAWINGS

AT6021/312/DL

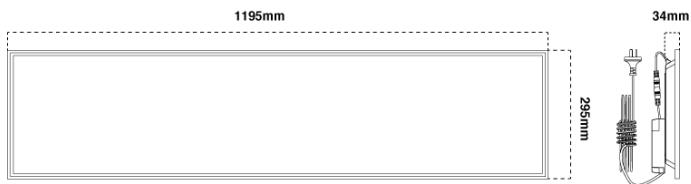

PHOTOMETRICS

AT6021/312/DL

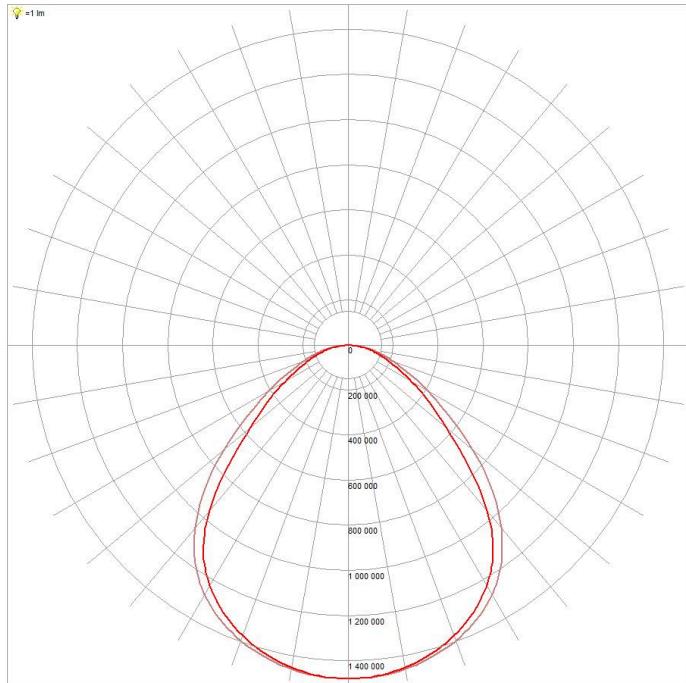

ACCESSORIES

Order code	10398
Description	Plaster Recessed frame 300x1200 WHITE to suit panels (PRE-ASSEMBLED)
Item Code	AT9050/PRF/WH
Order code	11315
Description	1m Panel Suspension Cable Kit - 4x Straight 1m Droppers
Item Code	AT9057
Order code	13352
Description	Trapezoid surface-mount one piece panel frame 300x1200mm White
Item Code	AT9059/312