

■ Non-Insulated Terminals

**CTR03150**

## HEX

### Features

- High quality hex crimp tool for terminating copper tube cables
- Die sets revolve within the tool head for quick and easy selection
- **Terminal sizes:**  
25mm<sup>2</sup>; 35mm<sup>2</sup>; 50mm<sup>2</sup>; 70mm<sup>2</sup>; 95mm<sup>2</sup> 120mm<sup>2</sup>; 150mm<sup>2</sup>

Product Code	Length	Handle
CTR03150	650mm	470mm



■ Non-Insulated Terminals

**CTR03120**

## HEX

### Features

- High quality hex crimp tool for terminating copper tube cables
- Die sets revolve within the tool head for quick and easy selection
- **Terminal sizes:**  
6mm<sup>2</sup>; 10mm<sup>2</sup>; 16mm<sup>2</sup>; 25mm<sup>2</sup>; 35mm<sup>2</sup>; 50mm<sup>2</sup>; 70mm<sup>2</sup>; 95mm<sup>2</sup>; 120mm<sup>2</sup>

Product Code	Length	Handle
CTR03120	650mm	470mm



■ Non-Insulated Terminals


**CTR03650**

## HEX

### Features

- High quality hex crimp tool for terminating copper tube cables
- Die sets revolve within the tool head for quick and easy selection
- **Terminal sizes:**  
6mm<sup>2</sup>; 10mm<sup>2</sup>; 16mm<sup>2</sup>; 25mm<sup>2</sup>; 35mm<sup>2</sup>; 50mm<sup>2</sup>

Product Code	Length	Handle
CTR03650	385mm	255mm

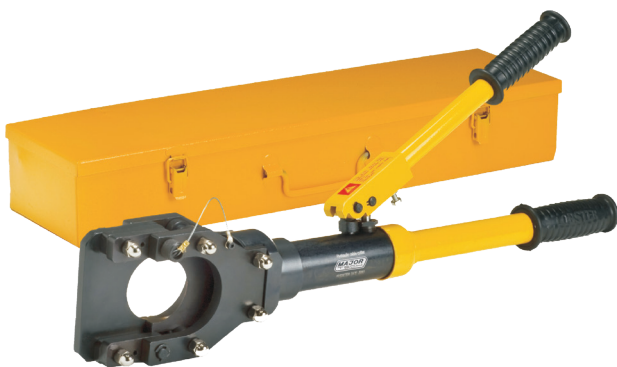

■ Includes metal carry case

**HCC45**

## HYDRAULIC CABLE CUTTER

### Features

- Ø45mm max (for armoured Cu/Alu cable)
- Cutting force: 12 Tonne
- Note: Not suitable for cutting steel wired armoured cables

Product Code	Die
HCC45	Ø45



■ Includes hard plastic carry case

**HCT435**

## HYDRAULIC SET

### Features

- Safety system inside
- Crimping force: 13 Tonne
- Stroke: 30mm
- Oil capacity: 145cc
- **Crimping dies (Included):**  
Copper: 50mm<sup>2</sup>, 70mm<sup>2</sup>, 95mm<sup>2</sup>, 120mm<sup>2</sup>, 150mm<sup>2</sup>, 185mm<sup>2</sup>, 240mm<sup>2</sup>, 300mm<sup>2</sup>, 400mm<sup>2</sup>  
Aluminium: 35mm<sup>2</sup>, 50mm<sup>2</sup>, 70mm<sup>2</sup>, 95mm<sup>2</sup>, 120mm<sup>2</sup>, 150mm<sup>2</sup>, 185mm<sup>2</sup>, 240mm<sup>2</sup>, 300mm<sup>2</sup>

Product Code	Dies
HCT435	35mm <sup>2</sup> - 400mm <sup>2</sup>