


ELECTRA CABLES

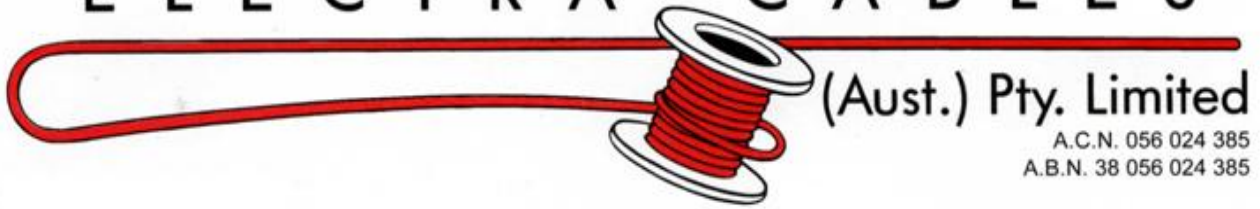

(Aust.) Pty. Limited

A.C.N. 056 024 385
A.B.N. 38 056 024 385

Multi Pair

Insulation: PVC V90HT

Core Colours: White and Black numbered cores

Sheath: PVC 5V-90

Sheath Colour: Black


Voltage: These cables are run with a 240V radial thickness sheath and must not be connected to mains power supplies.

Typical Features:

Electra Cables Part No.	No. of Pairs	Stranding No./mm	Nom. area mm ²	Nom. O/D. mm	Insulation Thickness mm	Sheath Thickness mm
EAS7301P	1	7/0.30	0.5	5.8	0.5	0.8
EAS7302P	2	7/0.30	0.5	7.7	0.5	0.8
EAS7303P	3	7/0.30	0.5	8.9	0.5	1.0
EAS7304P	4	7/0.30	0.5	9.8	0.5	1.0
EAS7306P	6	7/0.30	0.5	11.2	0.5	1.2
EAS7308P	8	7/0.30	0.5	13.6	0.5	1.2
EAS7310P	10	7/0.30	0.5	14.4	0.5	1.2
EAS7312P	12	7/0.30	0.5	15.8	0.5	1.2
EAS7316P	16	7/0.30	0.5	17.2	0.5	1.4
EAS7320P	20	7/0.30	0.5	19.0	0.5	1.4
EAS7324P	24	7/0.30	0.5	20.6	0.5	1.6
EAS7336P	36	7/0.30	0.5	25.4	0.8	1.8
EAS7401P	1	7/0.40	0.88	6.3	0.5	0.8
EAS7402P	2	7/0.40	0.88	8.5	0.5	0.9
EAS7403P	3	7/0.40	0.88	9.6	0.5	1.0
EAS7501P	1	7/0.50	1.5	7.0	0.5	0.8
EAS7502P	2	7/0.50	1.5	8.8	0.5	0.9
EAS7503P	3	7/0.50	1.5	10.6	0.5	1.0
EAS7504P	4	7/0.50	1.5	12.0	0.5	1.0
EAS7506P	6	7/0.50	1.5	14.6	0.5	1.2
EAS7508P	8	7/0.50	1.5	16.5	0.5	1.4
EAS7510P	10	7/0.50	1.5	18.4	0.5	1.4
EAS7512P	12	7/0.50	1.5	20.3	0.5	1.8

Note: Other types or other lengths of the above cables can be manufactured according to customers' specifications.

ELECTRA CABLES

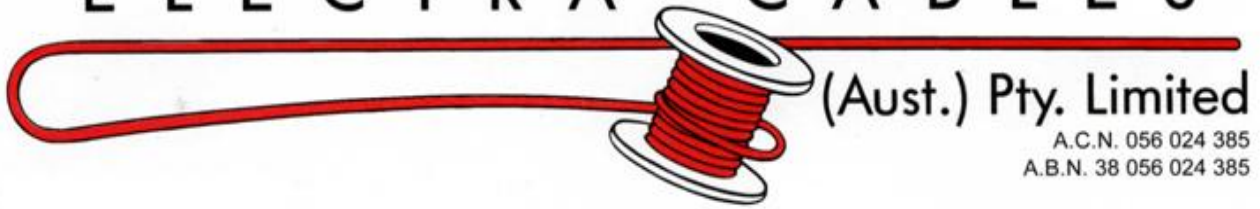

(Aust.) Pty. Limited

A.C.N. 056 024 385
A.B.N. 38 056 024 385

Electra Cables Part No.	No. of Pairs	Stranding No./mm	Nom. area mm ²	Nom. O/D. mm	Insulation Thickness mm	Sheath Thickness mm	Core Colours
EAS14201P	1	14/0.20	0.44	5.6	0.5	0.8	Red & Black
EAS16201P	1	16/0.20	0.5	5.8	0.5	0.8	Red & Black
EAS16202P	2	16/0.20	0.5	8.5	0.5	0.8	White & Black numbered cores
EAS24201P	1	24/0.20	0.75	6.8	0.6	0.8	Red & Black
EAS24202P	2	24/0.20	0.75	8.8	0.6	0.8	White & Black numbered cores
EAS32201P	1	32/0.20	1.0	7.0	0.6	0.8	Red & Black
EAS7301PHV#	1	7/0.30	0.5	7.0	0.8	0.8	Blue & White
EAS7302PHV#	2	7/0.30	0.5	8.7	0.8	0.8	Blue & White numbered cores
EAS7501PHV#	1	7/0.50	1.5	8.8	0.8	0.8	Black & White
EAS7502PHV#	2	7/0.50	1.5	9.9	0.8	0.8	Black & White numbered cores

Note: # These cable have 0.6/1kV insulation radial thickness. And blue sheath.

Note: Other types or other lengths of the above cables can be manufactured according to customers' specifications.