

DATA SHEET

GT240L

240v Photoelectric mains powered smoke alarm with a rechargeable lithium battery backup

- ✓ Split-spectrum sensor technology
- ✓ Built-in 10-year rechargeable lithium battery back-up
- ✓ Hardwire interconnection up to 24 units
- ✓ Wireless interconnected with maximum of 24 devices, compatible with GT wireless interconnected module
- ✓ Test and silence features in the central push button
- ✓ Loud sound output over 85 dB(A) at 3 meters
- ✓ Silenced by a working infrared remote controller

SYSTEM OVERVIEW

Mains Powered Smoke Alarm is specifically designed to continuously monitor smoke concentration. Adopting advanced split-spectrum photoelectric chamber and a built-in high-volume buzzer, it responds quickly and becomes highly sensitive with stable performance and low false alarm. Once the surrounding smoke concentration reaches the alarm value, it will promptly send out visual and audible alarm signal to remind the user to take immediate measures. Smoke alarm can be interconnected via a hardwired or wireless system (using optional WisuLink wireless interconnected module). Once one device triggers an alarm, the alarm signal will be pushed to every alarm in the interconnected network and they will raise the alarm in unison.



SCENE

Application scenarios include household or similar residential applications such as family home or apartment.

TECHNICAL SPECIFICATION

Working Principle

Collection Type	Smoke
Sampling Period	10 s
Sensor Type	Photoelectric

Alarm

Alarm Type	Smoke alarm, fault warning, low battery warning
Alarm Response Threshold	0.2dB/m-0.3dB/m
Alarm Volume	≥ 85dB (A) at 3 m (9.84 ft)
Alarm Mode	Visual and audible alarm
Silencing Function	Yes
Silence Duration	9 min
Silence by IR Remotes	Support

TECHNICAL SPECIFICATION

Basic Parameters

Indicator Light	Alarm, fault and operation indicator
LED Instructions	Standby: Green indicator remains lit Alarm: Red indicator flashes once per second Sensor fault: Yellow indicator flashes twice per minute Low battery backup fault: Yellow indicator flashes once per minute
Maximum Number of Connected Units	24 hardwire interconnected / 24 wirelessly interconnected with WisuLink wireless interconnected module

Power Supply

Power Source	AC 100V- 250V, 50/60Hz
Battery Back-up	10-year rechargeable lithium battery

Operating Ambient

Operating Environment	Indoor
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Operating Humidity	≤95% RH (non condensing)

Appearance

Color	White
Casing	PC+ABS
Dimensions	φ148.6mm × H55.5mm (φ5.85" × H2.19")
Weight	330 g
Installation	Ceiling Mount

Certification


Certifications	CE, UKCA and CSIRO ActivFire listed
Compliance Standard	EN 14604:2005+AC:2008 and AS 3786:2014

ORDERING INFORMATION


Type	Model Number	Description
Smoke Alarm	GT240L	240v Photoelectric mains powered smoke alarm with a rechargeable lithium battery backup

INSTALLATION

Ceiling mount

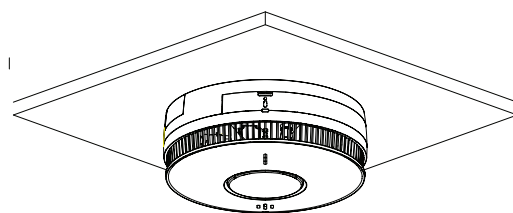

DIMENSIONS (MM/INCH)

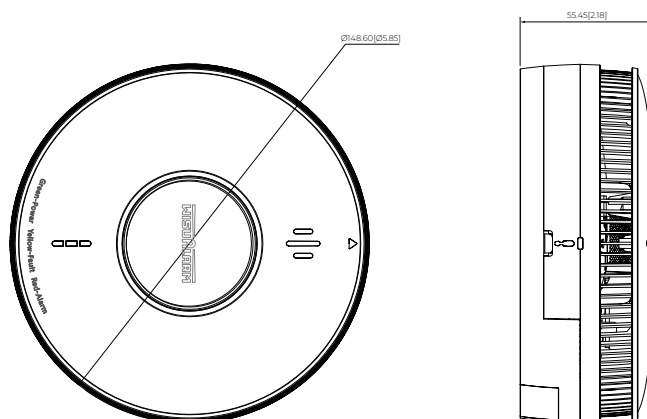



**HIGH PERFORMANCE
SMOKE ALARMS**

AUSTRALIA'S **BEST VALUE** SMOKE ALARMS

DATA SHEET

WIRELESS INTERCONNECTED ALARM CONTROL

10 years sealed lithium battery



- ✓ Works with Any GT wireless (RF) product
- ✓ 72 hour post event memory feature - locates trigger alarm from last alarming event
- ✓ Individual fire, CO and fault indicators
- ✓ Test function for testing all interlinked alarms from one centralised product
- ✓ Locate function for silencing all interlinked alarms except the initiating alarm
- ✓ Silence function for muting all interlinked alarms
- ✓ 10-year lithium battery

SYSTEM OVERVIEW

The Wireless Interconnected Alarm Control Unit can pair with any GT brand wireless interconnected alarms. After the successful pairing, it stays connected to your smoke alarms, carbon monoxide alarms and heat alarms all times. Adopting a microprocessor and advanced electronic technology, this unit receives real-time fire alarm and CO alarm information from interconnected devices, and promptly sends out visual alarm signal to remind the user to take immediate measures.



SCENE

This product is designed for residential scenarios such as homes, townhouses, villas, apartments, etc. where interconnected GT smoke alarms, Heat alarms or carbon monoxide alarms are fitted.


TECHNICAL SPECIFICATION

Indicator Light	Fire alarm: red CO alarm: red Fault: yellow
Operating Frequency	925 MHz
Maximum Number of Interconnected Units	24 pcs
Radio Signal Range	Up to 1000 m (3280.84 ft) in open air
Power Supply	DC 3V, CR123A non-replaceable battery
Battery Life	10 years
Operating Temperature	10°C to +55°C (+14°F to +131°F)
Operating Humidity	≤95% RH (non condensing)
Color	White
Dimensions	"84 mm × 84 mm × 25.7 mm (3.31" × 3.31" × 1.01")
Weight	91.3 g (0.20 lb)
Installation	Wall mount or portable

INSTALLATION

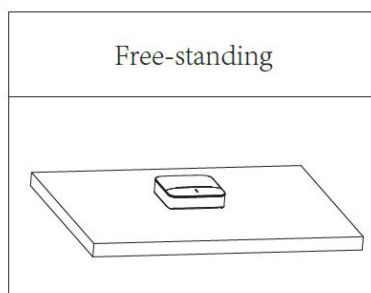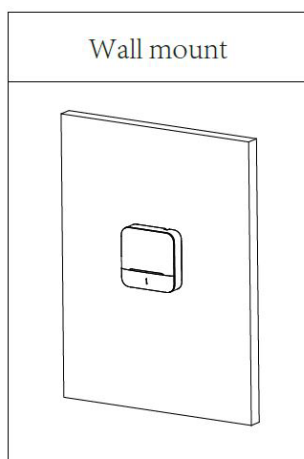

INSTALLATION

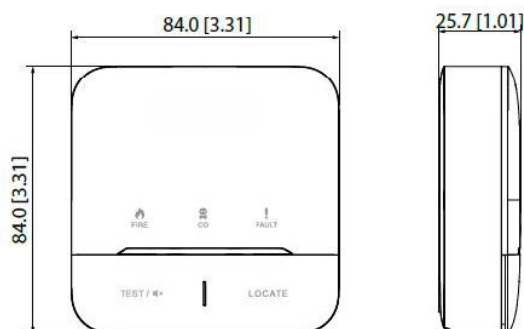

ORDERING INFORMATION

Type:

Wireless Interconnected Alarm Control Unit

Part Number:

GT REMOTE

Description:

Wireless Interconnected Alarm Control Unit