




Insulated prong busbar 1P 80A 16mm² 6C

KB181A1

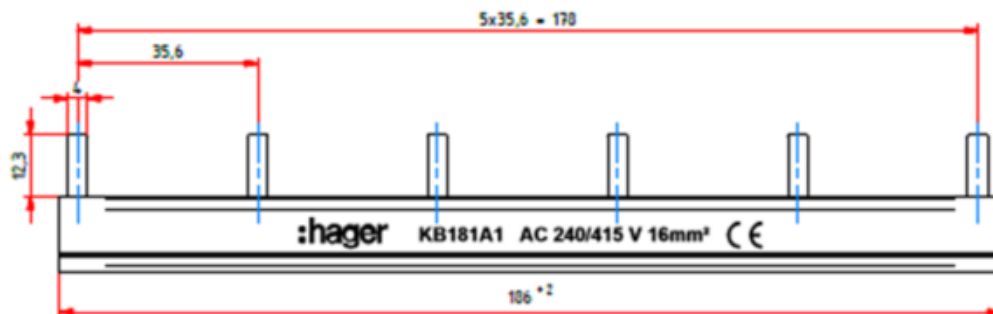

Architecture

Number of poles	1 P
-----------------	-----

Compatibility

Intended for the compatible references	Hager protection line devices
--	-------------------------------

Voltage

Max operating voltage	240/415 V AC
Rated impulse withstand voltage	4 kV

Dimensions

Length	186 +2 mm (6 prongs)
Prong Thickness	1.5 mm
Prong Length	11.3 mm
Prong Width	4 mm +0 -0.1 mm
Distance between centre of prong	35.6 +/-0.15 mm

Connection

Connection cross-sect. rigid cable	16mm ²
Connector type	busbar prong
Type of connection	with screw

Equipment

Number of connections	6 C
-----------------------	-----

Standards

European directive WEEE	not concerned
-------------------------	---------------