



MINI P60


Australian approved electronic transformer 12V AC / 60 watt

Application

For use with dimmable leading or trailing edge dimmers

Design Specifications


- Overload and short circuit protection
- Overheating protection
- Safe no load operation
- Dimmable with compatible trailing edge or leading edge dimmers
- Wired complete with flex and plug
- Minimum / Max loads -
LED 1 watt min / 20 watt max,
HALOGEN 1 watt min / 60 watt max,
Note: minimum load compatibility with a dimming device, may be subject to the inclusion of a load correction capacitor/s in the circuit.

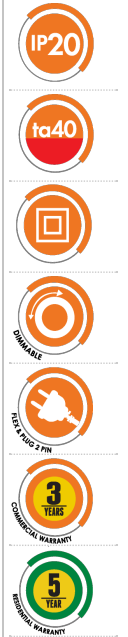

Performance

- Dimmable - **YES**
- Dimmer Type - **TRAILING OR LEADING EDGE**


Technical Specification

Product	Model No.	Input Voltage (V/AC)	Output Voltage (V/AC)	Frequency (Hz)	Power Factor	Power (W)
	MINI/P60	240	11.5	50	0.99	60
Dimmable		Dim (mm)				
YES		109(L) x 42(W) x 42(H)				

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

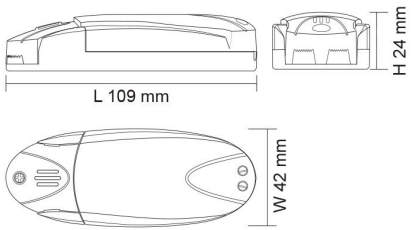

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**DIMMABLE
CONTROL WITH
SFI FLICKER
CONTROL
TECHNOLOGY**
when paired with
SAL SFI downlights



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

