

## OWPIROD

### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.




## Arctic Owl Outdoor Infrared Sensor

- Sensor uses Passive Infrared technology
- Manual override for greater convenience
- 110° detection up to 18 metres
- Suitable for installing on walls and ceiling both interior and exterior
- Fits standard mounting blocks using 84mm centres (example: HYSMB2025)
- 3 wire design (Active, Neutral, Sensor load) for greater reliability
- Relay in circuit allows for loads up to 2400W (incandescent)
- Easy mounting and adjustment
- Easy sensing, light level and on time adjustment
- LED compatible
- IP66 Rating
- Minimum load <10W
- Must be installed by a licenced electrician
- Colour: Beige


### Product Specification

Voltage	220-240V/AC
Time Duration	5 seconds to 10 minutes (time button is adjustable)
Time Delay	Minimum: 5 -10 seconds on initial power up at installation
Detection Method	Passive Infrared
Detection Angle	Up to 110°
Lux Control Level	<2 LUX
Detection Distance	Up to 18m depending on installation variable
Load	2400W incandescent 1200W inductive
Power Consumption	0.7W

### Area of Detection View from Top

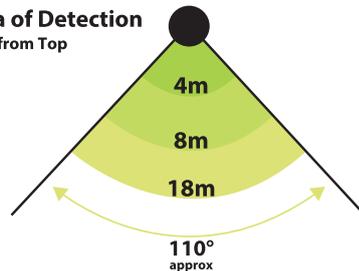

### Elevated View

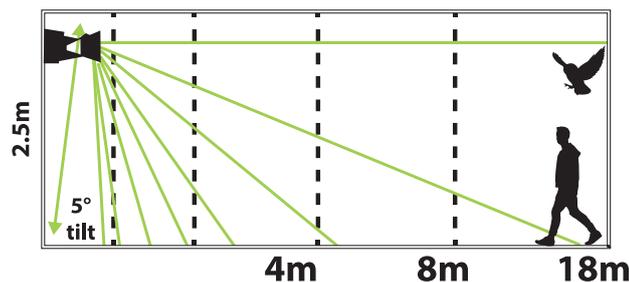

### Certification Number:

EESS-180273-1

### GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au

