


CONSTANT VOLTAGE LED DRIVER

PLUTO, PLUTO EGL


- Independent compact design
- Captured terminal screws
- Safe no load operation
- Overload protection
- Short circuit protection
- Overheating protection
- SELV and EMC compliant
- 1.2 m flex & 3 pin plug fitted (PLUTO 30, PLUTO 100, PLUTO 200)

WIRING DIAGRAM

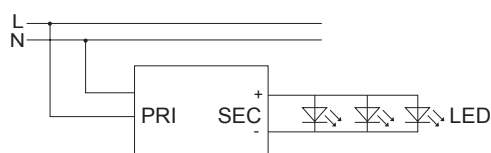


DIMENSIONS


PLUTO EGL

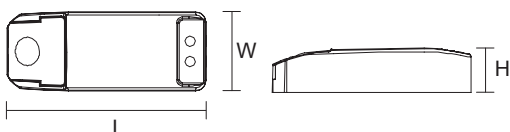

PLUTO 50

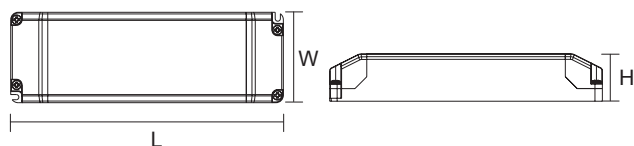

PLUTO 30, PLUTO 100, PLUTO 200

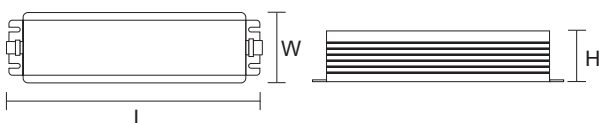

Model No.	Input	Power	Output	Power Factor	Dimensions L x W x H	IP Rating
PLUTO EGL 12V/6W	240V	6W	12V	0.6	81 x 40 x 22 mm	IP20
PLUTO EGL 12V/15W	240V	15W	12V	0.8	113 x 44 x 28 mm	IP20
PLUTO 15/24V	240V	15W	24V	0.8	113 x 44 x 28 mm	IP20
PLUTO 50/12V	240V	50W	12V	0.95	184 x 61 x 32 mm	IP20
PLUTO 50/24V	240V	50W	24V	0.95	184 x 61 x 32 mm	IP20
PLUTO 30/12V	240V	30W	12V	0.95	169 x 55 x 30 mm	IP67
PLUTO 30/24V	240V	30W	24V	0.95	169 x 55 x 30 mm	IP67
PLUTO 100/12V	240V	100W	12V	0.95	192 x 70 x 40 mm	IP67
PLUTO 100/24V	240V	100W	24V	0.95	192 x 70 x 40 mm	IP67
PLUTO 200/12V	240V	200W	12V	0.95	249 x 70 x 40 mm	IP67
PLUTO 200/24V	240V	200W	24V	0.95	249 x 70 x 40 mm	IP67