

DOWNLIGHTS

CASSIE CCT4 LED DOWNLIGHT

8W CCT4



3 YRS
LUMINAIRE
LIFETIME

30,000 HRS
LUMENS
PER W

82-101
LmW
IK 04

IP 44
IK RATING

OP 220-240
OPERATING
VOLTAGE

A 60°
BEAMANGLE

DIMMABLE
DIMMING

**3000K
4000K
5000K
6500K**
CCT

**Safety
Class**



PRODUCT INFORMATION DOCUMENT


CONSTRUCTION

- White or Black Nylon housing with polycarbonate trim
- Polymethyl methacrylate (PMMA) Diffuser with silver finish reflector
- Steel spring clips
- Pre-wired with 600mm Flex & Plug

FEATURES

- Switch on the back of the fitting allows selection between 3,000K, 4,000K, 5000K and 6,500K colour temperature
- Very low glare with UGR <19 (black version) or UGR<22 (white version)
- Offers Thermal Insulation rating of IC-4
- High efficacy of 82-101Lm/W
- Dimming Compatible with most TRIAC dimmers (compatibility list available on the website)

PRODUCT CODE	RCS8CCT4-01	RCS8CCT4-04
Comparable to:	50W halogen	50W halogen
Total Power (W):	7.9	7.8
Total Light Output (lm):	790	630
Total Emergency Light Output (lm):	NA	NA
Efficacy (lm/cctW):	101	82
Lux at 1m (lux):	800	750
Emergency Lux at 1m (lux):	NA	NA
CCT (K):	3000/4000/5000/6500	3000/4000/5000/6500
Cri:	80	80
IP:	44	44
Operation Temperature (°C)	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	3.9A/12ns	3.9A/12ns
RG Value:	0	0
Rated Life to L70B50 (Hrs):	>30000	>30000
Dimensions ØxH (mm):	103x85	103x85
Cut Out (mm):	90	90
Weight (kg):	0.2	0.2

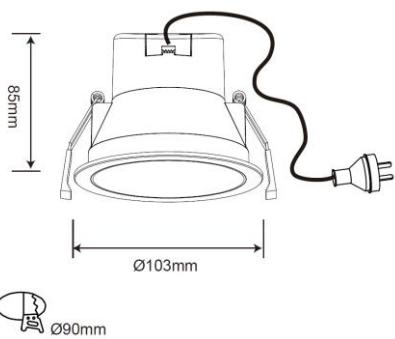

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

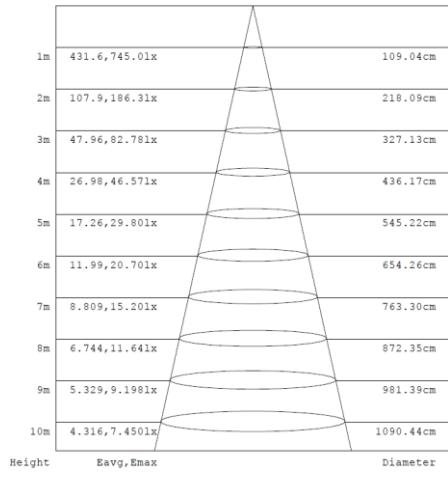


Diagram for RCS8CCT4-01 in 3000K. Other diagrams available on request