

ROBUS®

INDUSTRIAL

HARBOUR LED

IP65, CORROSION PROOF

CCT3 SELECTABLE



Self-Test Emergency pack
Control gear and battery

Fixing kit



PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Grey polycarbonate body
- Opal polycarbonate diffuser
- Polycarbonate clips and stainless steel mounting brackets
- Aluminum gear tray

FEATURES

- Complete range covering lengths of 2ft, 4ft & 5ft with wattages of 10W, 20W, 40W & 55W meeting just about any requirement
- CCT3 Integrated switch allowing selection between 3000K, 4000K and 6500K
- IP65 construction with high impact rating of IK08 providing protection against dust and water and can be installed in areas where occasional knocks or scrapes may occur
- Easy emergency conversion using self-test, plug and play emergency pack (RHA2WEMSTA-PSU)



	RHA1006CCT3-24	RHA2006CCT3-24	RHA2012CCT3-24	RHA4012CCT3-24	RHA4012CCT3E-24	RHA5515CCT3-24
Comparable to:	1x18W T8	2x18W T8	1x36W T8	2x36W T8	2x36W T8	2x58W T8
Total Power [W]:	9.5	18.4	18.8	38.9	37.6	52.7
Total Light Output [lm]:	1220	2370	2360	4800	4760	6800
Emergency Light Output [lm]:	180	280	300	310	310	300
Efficacy [lm/cctW]:	129	129	125	126	127	129
Lux at 1m [lux]:	300	670	590	1320	1330	1970
Emergency Lux at 1m [lux]:	90	80	80	80	80	80
CCT [K]:	3000/4000/6500	3000/4000/6500	3000/4000/6500	3000/4000/6500	3000/4000/6500	3000/4000/6500
CRI:	80	80	80	80	80	80
IP:	65	65	65	65	65	65
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	14A/20ns	10.4A/56ns	19.2A/56ns	18A/15ns	18A/15ns	19.2A/5.6ns
RG Value:	0	0	0	0	0	0
Rated Life to L70B50 (Hrs):	>54000	>54000	>54000	>54000	>54000	>54000
Dimensions LxWxH (mm):	650x72x70	650x117x70	1250x72x70	1250x117x70	1250x117x70	1550x117x70
Weight (kg):	0.60	0.9	1.1	1.55	1.75	1.9

ACCESSORIES:

RHA2WEMSTA-PSU

Self-test E-Pack with
LiFePo4 Battery

Emergency pack is compatible with:

- RHA1006CCT3-24
- RHA2006CCT3-24
- RHA2012CCT3-24
- RHA4012CCT3-24
- RHA5515CCT3-24

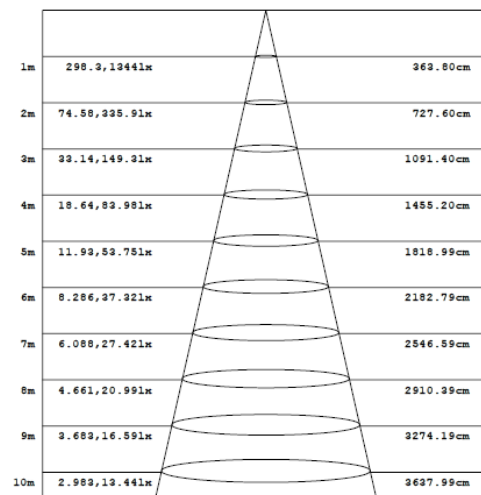
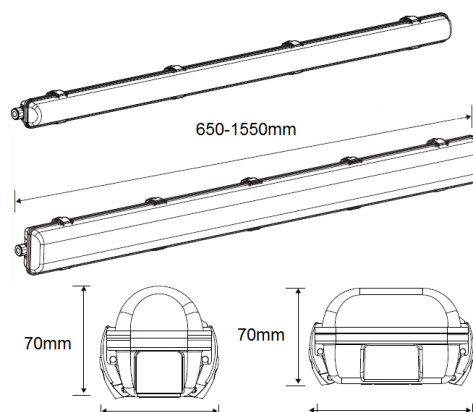


Diagram for RHA4012CCT3-24 in 4,000K. Other diagrams available on request

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA