ROBUS®

COMMERCIAL

SPEEDBEAM SLIM LED CCT3 SELECTABLE MULTIWATTAGE LED BATTEN

12-18W, 21-36W, IP20




PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Pressed steel, powder coated base
- Polycarbonate screw-less end caps
- Polycarbonate opal diffuser

FEATURES

- Unique design allows selection between four wattages and colour temperature between 3000K, 4000K and 5700K
- Quick release 2-part construction for easy and fast installation
- High efficacy up to 154lm/W
- Multiple BESA points for 20mm conduit entry

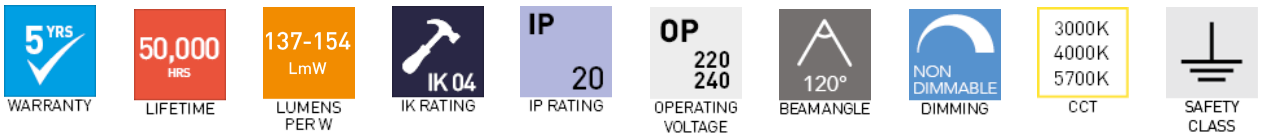

Product Code:	RSBSX06CCT3-01	RSBSX12CCT3-01
Comparable to:	1x/2x18W T8	1x/2x36W T8
Total Power (W):	11.8/13.3/15.8/18.0	21.1/26.1/31.2/35.8
Power Factor:	0.9	0.9
Total Light Output (lm):	1520/1860/2190/2460	3250/3980/4660/5250
Total Emergency Light Output (lm):	NA	NA
Efficacy (lm/cctW):	141/141/139/137	154/152/149/146
Lux at 1m (lux):	380/460/550/610	790/970/1140/1280
Emergency Lux at 1m (lux):	NA	NA
CCT (K):	3000/4000/5700	3000/4000/5700
CRI:	80	80
SDCM:	6	6
UGR:	25.9	26.4
IP:	20	20
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	15.7A/106us	18.3A/144us
Rated Life to L70B50 (Hrs):	50000	50000
Dimensions LxWxH (mm):	570x60x62	1170x60x62
Weight (kg):	0.5	0.9

Product is certified to all the relevant standards.
Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000 WEB: ROBUS.COM
UK: TEL: 0800 973 220 WEB: ROBUS COM
AUS: TEL: +61 7 3890 5444 WEB: AU.ROBUS.COM
NZ: WEB: NZ.ROBUS.COM

ROBUS®

COMMERCIAL

SPEEDBEAM SLIM LED CCT3 SELECTABLE MULTIWATTAGE LED BATTEN

12-18W, 21-36W, IP20

Cone Illuminance Diagram

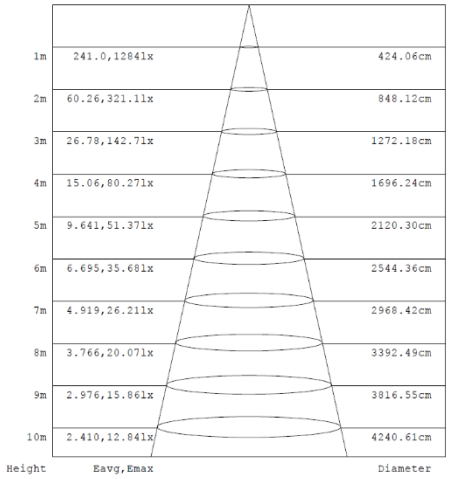


Diagram for RSBSX12CCT3-01 38W in 4000K. Other diagrams available on request

Polar Intensity Diagram


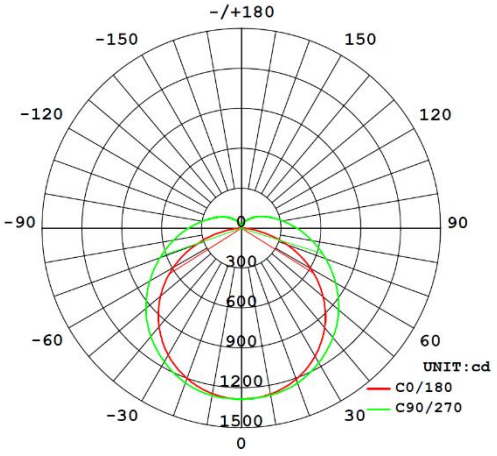


Diagram for RSBSX12CCT3-01 38W in 4000K. Other diagrams available on request

Dimension Diagram

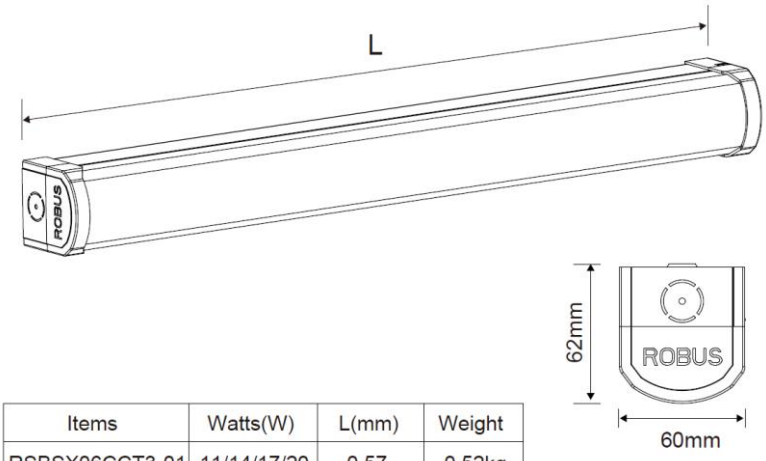

Items	Watts(W)	L(mm)	Weight
RSBSX06CCT3-01	11/14/17/20	0.57	0.52kg
RSBSX12CCT3-01	22/27/33/38	1.17	0.90kg

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000 WEB: ROBUS.COM
UK: TEL: 0800 973 220 WEB: ROBUS COM
AUS: TEL: +61 7 3890 5444 WEB: AU.ROBUS.COM
NZ: WEB: NZ.ROBUS.COM