



PANEL S9784TC/DP2 - 12/50W


LED Backlit panel with selectable CCT and power

Application

Designed for commercial and office space lighting tasks.

Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- White powder coat finish, high efficiency Backlit LED optics, CRI >90
- Remote flickerCONTROLLED non-dimmable LED driver, complete with flex and plug
- Selectable CCT 3000K/4000K/5700K
- Suspension configuration guide:
S9784SP4NS requires (4 x Brackets in Pkt),
(612 Panel Requires 6 x Brackets).
Suspension Wire Only : SSY1512,
(612 Panels Requires 3 x SSY1512)
- Emergency models available using SEL20PK, [see Interior Emergency section.](#)

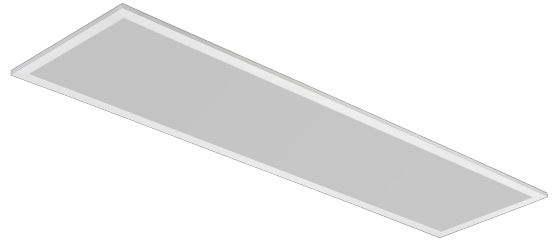

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**



Note (1) : Lumens (lm) shown are for TOTAL system performance.

Note (2) : For dimmable configurations, the CCT must be specified at the time of order and the DP function is deactivated.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".