



TRADESTAR SE7169MP - 70/300W


A versatile LED floodlight range with four models ranging from 70 - 300 watt, with selectable colour temperature and power.

Application

Perfect for any exterior space from residential small wattage designs through to high performance commercial applications

Design Specifications

- Integral LED control gear, non-dimmable 70, 100, 150, 200, 300 watt models
- Robust die-cast aluminium body profile with multi-function angled trunnion bracket, colour black
- Pre-wired with 1500mm UV rated flex for easy installation
- IK08, IP66 rated
- CRI >80, CCT 3000/4000/5000K and an impressive 140lm/W optical performance at 4000K
- 110 degree wide beam distribution, tempered glass lens

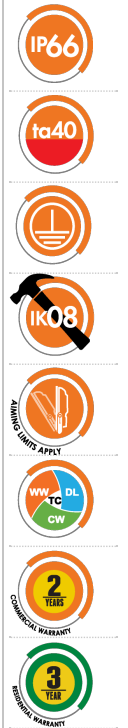

Technical Specification

Product	Input Voltage (V/AC)	Model No.	Power (W)	Lumens (lm)	CCT (K)	CRI
	240	SE7169MP70TC	70	8400/9800/9100	3000/4000/5000	80
	240	SE7169MP100TC	100	12000/14000/13000	3000/4000/5000	80
	240	SE7169MP150TC	150	18000/21000/19500	3000/4000/5000	80
	240	SE7169MP200TC	200	24000/28000/26000	3000/4000/5000	80
	240	SE7169MP250TC	250	30000/35000/32500	3000/4000/5000	80
	240	SE7169MP300TC	300	36000/42000/39000	3000/4000/5000	80

Beam Angle (°)	Body Colour	Dim (mm)	Mass (kg)
110	Black	280(L) x 55(W) x 246(H)	2.55
110	Black	280(L) x 55(W) x 246(H)	2.55
110	Black	310(L) x 55(W) x 345(H)	3.77
110	Black	334(L) x 57(W) x 351(H)	4.27
110	Black	435(L) x 63(W) x 395(H)	7.3
110	Black	435(L) x 63(W) x 395(H)	7.93

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

