



ECOLINE MKII SL9732 - 12/40W

LED narrow diffused batten with selectable colour temperature and dual power

Application

Conventional linear LED batten products for commercial service spaces

Design Specifications

- 65 mm narrow steel body
- Quality white powder coat finish with robust polycarbonate diffuser
- Large terminal block, easy installation
- Selected models as listed below are designed with selectable colour temperature with an integral DIP switch 3000K / 4000K / 5700K and selectable power
- High efficiency SMD LED chips, CRI > 80, 120 degree beam distribution
- Integral constant current non-dimmable LED driver 20 and 40 watt models, emergency options available compliant to AS/NZS2293



Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Multiple Wattage	Lumens (lm)	CCT (K)
SL9732/20TC/DP2	LED DIFFUSED BAT	240		12/20	1500/2500	3000/4000/5700
SL9732/40TC/DP2	LED DIFFUSED BAT	240		24/40	3000/5000	3000/4000/5700
SL9732/40CW2	LED DIFFUSED BATTEN	240	40		5000	4000
SL9732/40DL2	LED DIFFUSED BATTEN	240	40		5000	5700
SL9732/20TC/C	LED DIFF BATT TC CORRIDOR FUNCTION	240	20		2500	3000/4000/5700
SL9732/40TC/C	LED DIFF BATT TC CORRIDOR FUNCTION	240	40		5000	3000/4000/5700


Technical Specification

Model No.	CRI	Beam Angle (°)	Dim (mm)	Body Colour
SL9732/20TC/DP2	80	120	600(L) x 65(W) x 65(H)	WHITE
SL9732/40TC/DP2	80	120	1135(L) x 65(W) x 65(H)	WHITE
SL9732/40CW2	80	120	1135(L) x 65(W) x 65(H)	WHITE
SL9732/40DL2	80	120	1135(L) x 65(W) x 65(H)	WHITE
SL9732/20TC/C	80	120	600(L) x 65(W) x 65(H)	WHITE
SL9732/40TC/C	80	120	1135(L) x 65(W) x 65(H)	WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SL9732 20

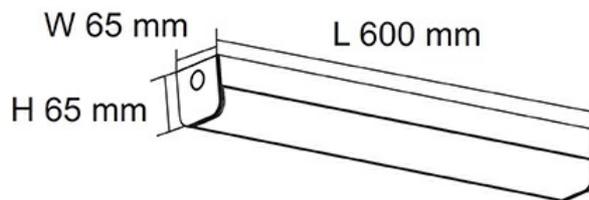

SL9732 40

