

VIFTU

Interior Low Profile DC Surface Mounted Ceiling Fan with LED Tri-CCT Light




- Input voltage: 220-240V 50/60Hz
- Output voltage: LED 210V DC and Fan 24V DC
- Housing: plastic
- Diffuser: opal plastic
- Blade: PC
- Mounting plate: aluminium
- Tri-CCT (3000K / 4000K / 5500K) in one fitting
- LED chips: 72pcs 2835
- Power factor: 0.9
- Ambient temperature: -20 to 40°C
- Speed, Timer, Dimming & Reverse function on remote
- Suitable for 2 way switching

Fan Features:

- Fan Speed: 6-speed fan control with remote
- Number of Blades: 8
- Airflow: 43 m³/min
- RPM: 1080
- Fan power consumption: 15W
- Fan sound power level: 58 dB



VIFTU1

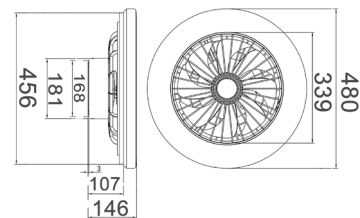

Part No.	Description	Lumens			Light Watt	Power Factor	CRI	Box Weight	Box Size	Carton QTY
		3000K	4000K	5500K						
VIFTU1	Ceiling Fan w/LED Light RND Wh Opal Diff 40W Tri Dimm Remote Control	2150LM	4300LM	2150LM	40W	0.9	80	3kg	53x53x17cm	1/1

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)