

SPECTRE (25W)

XCLS2



120°



IP20



COLOUR
TEMP ADJUSTABLE




SMD LED



SURFACE
MOUNTED


PHOTOMETRIC DIAGRAM (4000K)

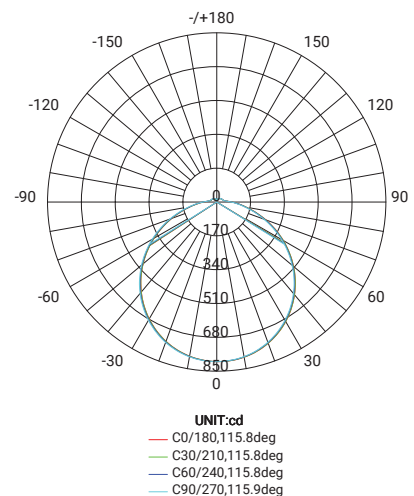

PHOTOMETRIC DATA

Efficacy	≥86
CCT	3000/4000/5700K
CRI	≥80
Beam Angle (°)	120°
LED Type	SMD3825

DIAGRAM(S)/ADDITIONAL

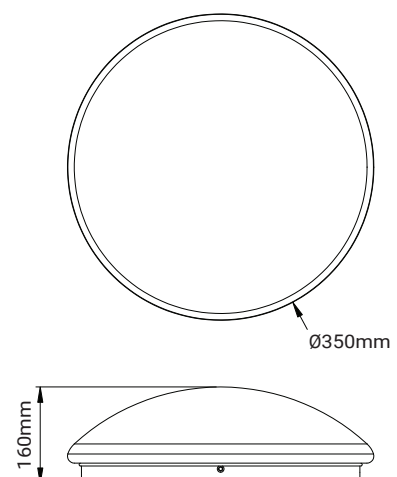

DESCRIPTION

The XLED Spectre surface mounted LED Oyster fitting has sleek and elegant design and feel while using energy saving LED. Opal diffuser, with pressed metal powder coated base, this durable, efficient surface oyster fitting suits many simple applications.



KEY INFORMATION

Model	XCLS2
Power (W)	25W
Lumens (lm)	~2170/2500/2200lm
Construction	Powder coated steel body Opal diffuser
Dimming Options	Non-dimmable
Fitting Colour	White
IP Rating (IP)	IP20
Lifespan (hrs)	50,000hrs
Dimensions (mm)	Ø380mm x 160mm
Mounting	Surface mounted
Control Gear	Integral electronic LED driver

Additional:

Twist lock removable diffuser
3 Year replacement warranty on fitting