

SURFACE MOUNT EXIT

XEX24SML



IP40




COLOUR
TEMP. 6500K



SURFACE
MOUNTED

PHOTOMETRIC DIAGRAM

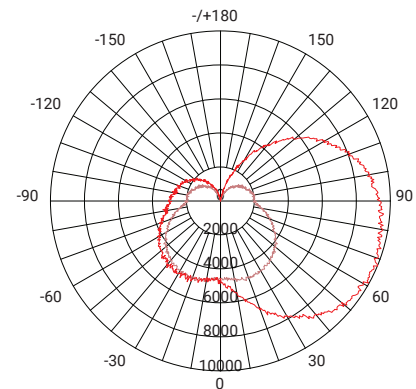

DESCRIPTION

The XEX24SML is a multi-purpose LED exit sign which is available as hybrid single or double-sided design which means one fitting does it all. Complete with interchangeable pictogram panels.



OPERATIONAL INFORMATION

Operating Mode	Maintained or Non Maintained
Voltage (V)	220-240V
Operating Temperature	-25~+50°C
IP Rating	IP40
Wiring	Hard wired
Mounting Type	Surface mounted
Testing System	Auto test and Manual test button
Construction	Polycarbonate body Acrylic pictogram diffuser
Classification	AS/NZS 2293
Standards	CO:E2 C90:E2
Life Span (hrs)	50,000hrs
Dimensions (mm)	358mm x 220mm x 80mm

ELECTRICAL DATA

Battery	LiFePo4 3.2V 1500mAh
Power Consumption	4.5W
Charging Method	Intelligent current limited constant voltage charger
Charging Time (hr)	24hrs
Charging Operation	Continuous
Duration (hr)	2hrs

OPTICAL DATA

LED Type	Epistar SMD2835
LED Quantity	18
CCT	6500K
CRI	≥80
Viewing Distance	24 metres

ADDITIONAL INFORMATION

- 1 Year Replacement Warranty on Fitting
- Available in Black or White
- Single and double sided decal
- Self testing function included