


CEILING OR WALL MOUNT JUMBO EXIT - 40M

XEX40SML-D



IP20



COLOUR
TEMP. 6500K




SURFACE / WALL
MOUNT


DESCRIPTION

The ILD Double-sided Jumbo Exit Light offers unmatched clarity, energy efficiency, and durability. Ideal for large areas, it ensures visibility and safety in a sleek, sustainable design.

40m viewing allows for installation into larger spaces such as warehouses and distribution facilities or any application requiring more extended view areas.

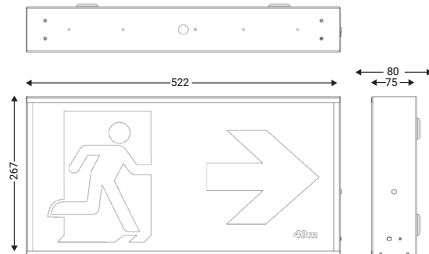

PHOTOMETRIC DIAGRAM

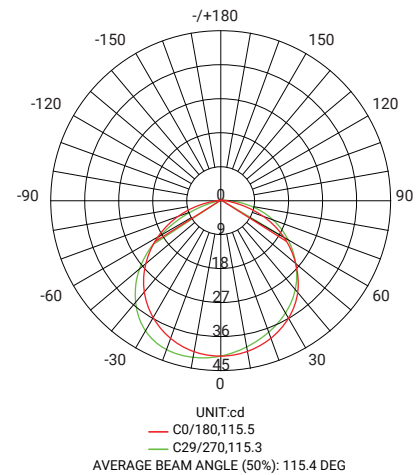

ELECTRICAL DATA

Battery	LiFePo4 3.2V 3000mAh
Power Consumption	5W
Charging Method	Intelligent current limited constant voltage charger
Charging Time (hr)	24hrs
Charging Operation	Continuous
Duration (hr)	2hrs

OPTICAL DATA

LED Type	Epistar SMD2835
LED Quantity	12
CCT	6500K
CRI	≥80
Viewing Distance	40 metres

OPERATIONAL INFORMATION

Model	XEX40SML-D
Operating Mode	Maintained or Non Maintained
Voltage (V)	220-240V
Operating Temperature	-25~+50°C
Fiting Colour	White
IP Rating	IP20
Wiring	Hard wired
Mounting Type	Surface or wall mount
Testing System	Auto test and Manual test button
Construction	Polycarbonate body Acrylic pictogram diffuser
Classification	C0:D10 C90:D8
Life Span (hrs)	50,000hrs
Dimensions (mm)	L 522mm x W 130mm x H274mm