

# ECLIPSE (50W)

XFLE50



120°



IP65



COLOUR  
TEMP. 4000K




SMD LED



SURFACE  
MOUNT

## PHOTOMETRIC DIAGRAM

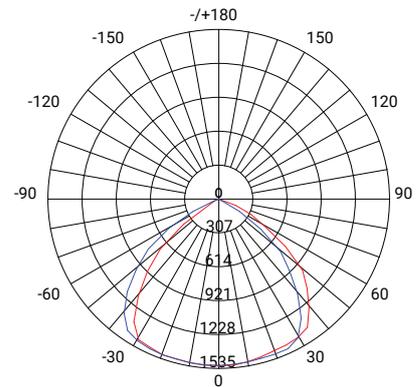

## PHOTOMETRIC DATA

Efficacy (lm/W)	≥100
CCT	4000K
CRI	≥80
Beam Angle (°)	120°
LED Type	SMD2835

## DESCRIPTION

The XLED ECLIPSE series of floodlights are robust high-performance LED floodlights, which are ideal for commercial buildings, security lighting, sign illumination and public areas applications as well as residential applications.

Available in many wattages & sizes, the eclipse series not only provides great lighting solutions, BUT also fits many budgets.




## KEY INFORMATION

Model	XFLE50
Power (W)	50W
Lumens (lm)	≥5000lm
Construction	Die cast aluminium body Aluminium reflector Tempered glass diffuser
Dimming Options	Non-dimmable
Fitting Colour	Black
IP Rating (IP)	IP65
Lifespan (hrs)	40,000hrs
Dimensions (mm)	L205.9mm x W159.9mm x H33.5mm
Mounting	Surface mounted
Control Gear	Integral Electronic inbuilt constant current LED driver

Additional:

3 Year replacement warranty on fitting

## DIAGRAM(S)

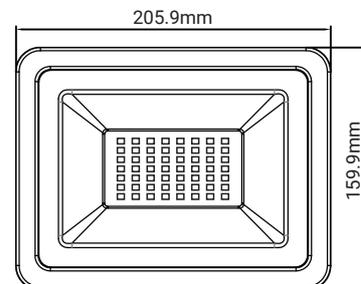

33.5mm

