



LED PANEL LIGHT

XPLB1200A

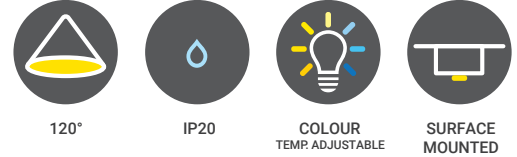


PHOTOMETRIC DIAGRAM

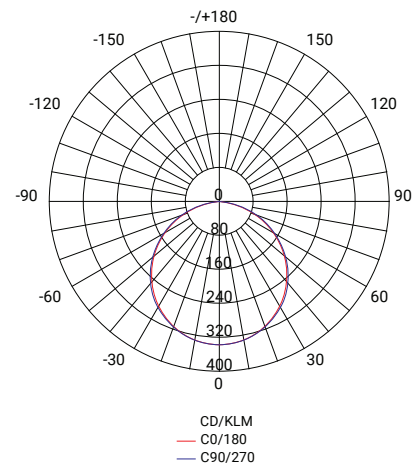

PHOTOMETRIC DATA

Efficacy (lm/W)	≥89
CCT	3000/4000/6000K
CRI	≥80
Beam Angle (°)	120°
Light Engine Type	LED Strip c/w LEN Optic

DIAGRAM(S)

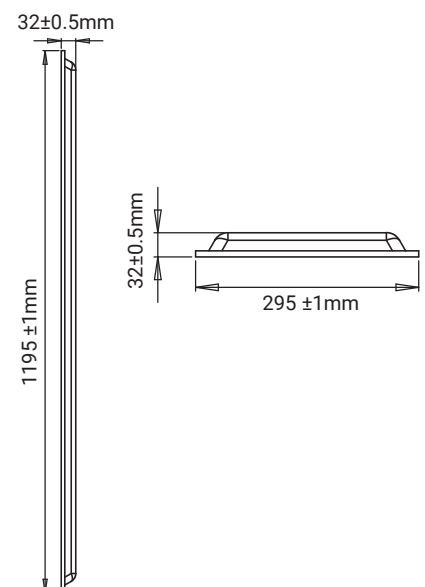

DESCRIPTION

The XLED Sleek is an ultra-thin luminaire particularly suitable for general office and retail applications however also ideal for showrooms and classrooms. Designed for T-bar ceilings, recessed ceilings or suspended applications. Multiple wattages & lumen packages make for super flexible solution for many projects. Optional plaster recessing kit also available



KEY INFORMATION

Model	XPLB1200A
Power (W)	40W
Lumens (lm)	~3600/3950/3810lm
Construction	White powder coated cold roll steel body
	Frosted matt polystyrene diffuser
Dimming Options	Non-dimmable
Fitting Colour	White
IP Rating (IP)	IP20
Lifespan (hrs)	30,000hrs
Dimensions	L1195mm x W295mm x H32mm
Mounting	Surface mounted

Additional:
3 Year replacement warranty on fitting