



DOMUS®

PTC Bathroom Heater Range



2025

Experience the Future of Bathroom Heating with Advanced PTC Technology!

Step into comfort with our cutting-edge PTC Bathroom Heater range, featuring the latest in PTC (Positive Temperature Coefficient) heating technology. Unlike traditional resistance heaters, PTC heating elements are designed to self-regulate and adjust their power output as the temperature rises, ensuring consistent, energy-efficient warmth without the risk of overheating.



Why Choose PTC Heating?

- **Fast & Efficient Heating** – PTC heaters warm up rapidly, delivering instant, comfortable heat to your bathroom. No more waiting for a chilly space to get cozy!
- **Smart & Safe** – Unlike conventional heaters, PTC elements automatically regulate their temperature, reducing power consumption as the room warms up, preventing overheating, and enhancing safety.
- **Energy-Saving Technology** – With intelligent heat control, PTC heating optimises energy use, lowering running costs while maintaining the perfect level of warmth.
- **Durable & Maintenance-Free** – PTC heating elements have a longer lifespan than traditional filament or coil heaters, meaning less wear and tear and no need for frequent replacements.
- **Even Heat Distribution** – Enjoy consistent warmth without hot or cold spots, creating a comfortable bathroom environment every time you step in.

Paired with a powerful exhaust fan for moisture control and a bright, efficient LED light, our PTC Bathroom Heater range brings together warmth, ventilation, and illumination—all in a sleek, modern design that enhances your bathroom experience. Upgrade to a smarter, safer, and more efficient way to heat your bathroom. Feel the warmth of innovation with PTC heating!

Patented Technology exclusive to Domus in Australia

Domus PTC Bathroom Heaters feature a patented Heat Breeze Technology which is exclusive to Domus in Australia.

Advanced Technology

Domus PTC Bathroom Heaters feature an advanced safety feature where the unit will automatically shut off after two hours in case it is left on accidentally. When the 5 Gang Switch are reset to off, or where the Digital Wall Controller is pressed on any switch, it will reset to active mode and will restart the advanced safety Switch Off Mode again for another two hours of operation, and so on.



Heating



Powerful Extraction




Circulating Air



Bright Tricolour Switchable LED Light

Premium Range

- 6-In-1 Bathroom Heater, Exhaust Fan, Circulating Fan, Dry Heat, Vent (Infinity)/Sway (Airway) and Light Unit
- Single DC Motor (Infinity)
- Single AC Motor (Airway)
- 8 Switch Digital Wall Controller – Easy Wiring – only two cores required
- PTC Technology with Patented Heat Breeze Feature
- Slim Design – 315x615mm
- Unique Fascia Appearance – Digital Temperature Display
- Colour Indicators that visually display which mode is activated:
- Red – Heat Mode
- Blue – Exhaust Mode
- Green – Circulation Mode
- Orange – Dry Mode (Infinity Only)

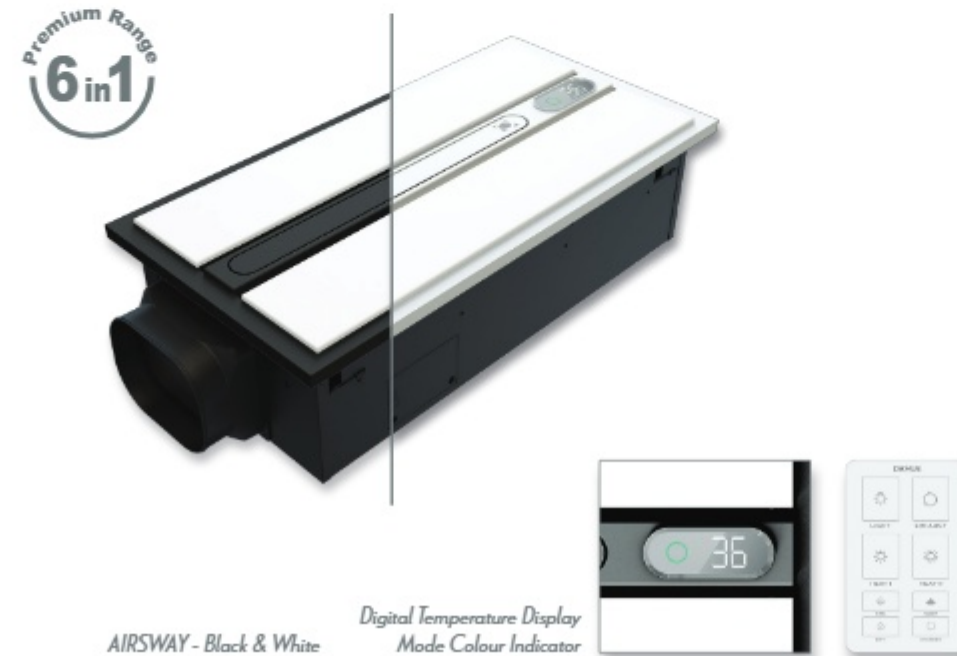

Standard Range

- 4-In-1 Bathroom Heater, Exhaust Fan, Circulating Fan and Light Unit
- Twin AC Motor
- 5 Gang Rocker Wall Switch
- PTC Technology with Patented Heat Breeze Feature
- Slim Design – 315x615mm
- Unique Fascia Appearance – NO Digital Temperature Display



Retrofit Range

- 4-In-1 Bathroom Heater, Exhaust Fan, Circulating Fan and Light Unit
- Single AC Motor
- Digital Wall Controller – Easy Wiring – only two cores required
- PTC Technology with Patented Heat Breeze Feature
- Retrofit Cutout Design – 390x390mm Fascia – 330x350mm minimum cutout
- Unique Fascia Appearance – NO Digital Temperature Display



Infinity - 6 in 1 Premium Bathroom Heater




Premium Range 6 in 1

The INFINITY 6-In-1 Premium Bathroom Heater offers an ultra-modern slimline twin circle design, as well as the latest technology in PTC bathroom heater models. Premium range offers 6-In-1 Functions – Heater, Exhaust Fan, Circulating Fan, Dry Heat, Vent and Light Unit. Patented Heat Breeze Technology heats the room while offering low level extraction to help reduce condensation build up in the bathroom. This premium line model features a single DC Motor, producing a 2150W output of powerful heat breeze, high volume extraction at 500m³/h, circulating fan to reduce warm temperature build up, and a 25W LED Tri-Colour switchable light.

Mode colour indicator offers the consumer an attractive visual coloured indication to which mode is in operation. Digital temperature is displayed discreetly for viewing ambient temperature while in use. Complete with Digital Wall Controller, allowing easy switching from all modes, and an ALL-OFF button for exiting. Domus PTC Bathroom Heaters feature an advanced safety feature where the unit will automatically shut off after two hours in case it is left on accidentally. If the unit runs for two hours continuously, a safety function will automatically turn it off. This setting can be overridden and reset by pressing any switch on the controller within this two-hour period.

Ideal for new installations with a slimline 615x315mm fascia frame, and a 595x280mm cutout. Accessories include Digital Controller Wall Control, 3M Flexible Duct, and Exterior Grille. All Domus PTC Bathroom Heaters are backed by our 5 Year In-Home Warranty.

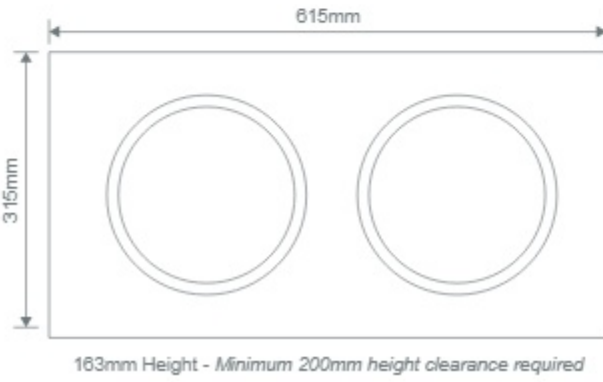

Lighting Up Your World

6-In-1 Slimline Bathroom Heater Unit

- Features PTC Heating – Dual heating settings
- 500m³/h High Volume Extraction Fan to remove moisture and steam
- Circulating Fan setting blows air to help air movement to reduce warm temperature buildup
- Dry Heat Function for a quick and easy setting to warm room and remove moisture
- Vent Function is ideal for removing odours and mould buildup
- 25W LED Tri-Colour Switchable Light
- Single DC Motor
- 2250W Max Power Consumption
- Available in White
- Includes Digital Controller Wall Switch, 3M Flexible Ducting and exterior grille
- Mode Colour Indicator
- 595 x280mm cut-out

Specification Features

Input Voltage:	240VAC
Power (W):	2250W
Motor Wattage (W)	75W DC
Fan Size:	75W
Air Extraction:	500m³/h
Heat Wattage:	2150W
Heat Type:	PTC Heating Element
Light Wattage:	25W LED
IP rating (IP):	IPX2
Decibel Rating (dB):	≤48dB
CCT:	3000K - 4000K - 5000K (Changeable)
CRI:	≥80
Cutout:	595x280mm
Fascia Size:	615x315mm
Duct Size:	150mm
Accessories: 8-Switch Digital Wall Controller, 3M Flexible Duct, Exterior Grille	

Lumen Output

3000K	4000K	5000K
1500lm	1850lm	1750lm

Item No.	Variant
INFINITY	56010

domuslighting.com.au




White - Wall Controller (Included)



Horizontal Switchplate Accessory (Included)



Coloured Vertical Switchplate Covers (Sold Separately)

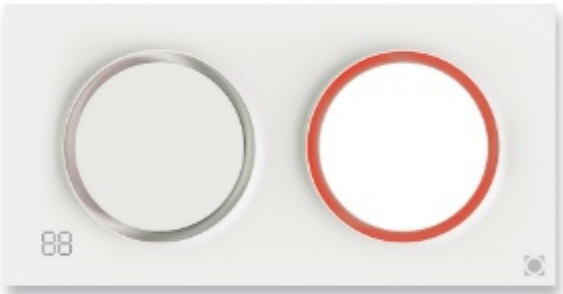

Red - Heat



Blue - Exhaust



Green - Circulation



Orange - Dry

Airsway - 6 in 1 Premium Bathroom Heater



Premium Range 6 in 1

The AIRSWAY 6-In-1 Premium Bathroom Heater offers a unique oscillating sway design, as well as the latest technology in PTC bathroom heater models. Premium range offers 6-In-1 Functions – Heater, Exhaust Fan, Circulating Fan, Dry Heat, Sway and Light Unit. Patented Heat Breeze Technology heats the room while offering low level extraction to help reduce condensation build up in the bathroom. This premium line model features a single AC Motor, producing a 2150W output of powerful heat breeze, high volume extraction at 500m³/h, circulating fan to reduce warm temperature build up, and a 25W LED Tri-Colour switchable light.

Mode colour indicator offers the consumer an attractive visual coloured indication to which mode is in operation. Digital temperature is displayed discreetly for viewing ambient temperature while in use. Complete with Digital Wall Controller, allowing easy switching from all modes, and an ALL-OFF button for exiting. Domus PTC Bathroom Heaters feature an advanced safety feature where the unit will automatically shut off after two hours in case it is left on accidentally. If the unit runs for two hours continuously, a safety function will automatically turn it off. This setting can be overridden and reset by pressing any switch on the controller within this two-hour period.

Ideal for new installations with a slimline 615x315mm fascia frame, and a 595x280mm cutout. Accessories include Digital Controller Wall Control, 3M Flexible Duct, and Exterior Grille. All Domus PTC Bathroom Heaters are backed by our 5 Year In-Home Warranty.



Lighting Up Your World

6-In-1 Slimline Bathroom Heater Unit

- Unique Oscillating Sway Outlet
- Features PTC Heating – Dual heating settings
- 500m³/h High Volume Extraction Fan to remove moisture and steam
- Circulating Fan setting blows air to help air movement to reduce warm temperature buildup
- Dry Heat Function for a quick and easy setting to warm room and remove moisture
- 25W LED Tri-Colour Switchable Light
- Single AC Motor
- 2250W Max Power Consumption
- Available in Black and White
- Includes Digital Controller Wall Switch, 3M Flexible Ducting and exterior grille
- Mode Colour Indicator
- 595 x 280mm cut-out

Specification Features

Input Voltage:	240VAC
Power (W):	2250W
Motor Wattage (W)	60WAC
Fan Size:	60W
Air Extraction:	500m ³ /h
Heat Wattage:	2150W
Heat Type:	PTC Heating Element
Light Wattage:	25W LED
IP rating (IP):	IPX2
Decibel Rating (dB):	≤48dB
CCT:	3000K - 4000K - 5000K (Changeable)
CRI:	≥80
Cutout:	595x280mm
Fascia Size:	615x315mm
Duct Size:	150mm

Accessories: 8-Switch Digital Wall Controller, 3M Flexible Duct, Exterior Grille

Lumen Output

3000K	4000K	5000K
1900lm	2150lm	2100lm

Item No.	Variants	
	Wht	Blk
AIRSWAY	56013	56014




White - Wall Controller (Included)



Horizontal Switchplate Accessory (Included)



Coloured Vertical Switchplate Covers (Sold Separately)

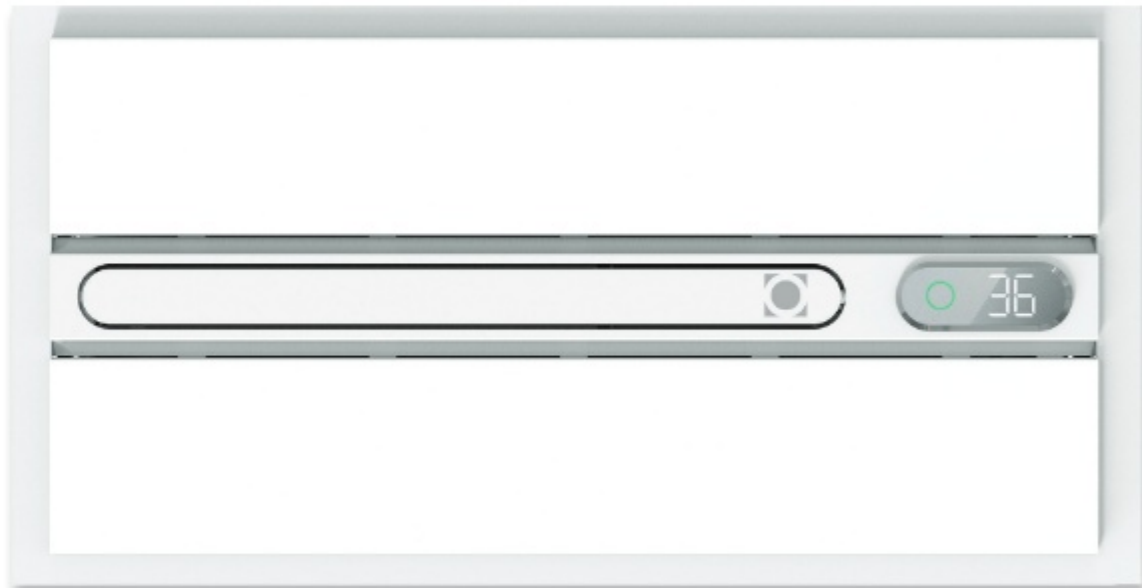

Tropix - 4 in 1 Standard Bathroom Heater



Standard Range 4 in 1

The TROPIX 4-In-1 Standard Line Bathroom Heater offers an modern slimline design to suit most contemporary bathroom designs, combined with the latest technology in PTC bathroom heater models. Standard Line range offers 4-In-1 Functions – Heater, Exhaust Fan, Circulating Fan, and Light Unit. Patented Heat Breeze Technology heats the room while offering low level extraction to help reduce condensation build up in the bathroom. This Standard Line model features twin AC Motors, producing a 2150W output of powerful heat breeze, high volume extraction at 500m³/h, circulating fan to reduce warm temperature build up, and a 25W LED Tri-Colour switchable light.

Supplied with 5-Gang Rocker Bakelite Wall Switch, compatible with most previously installed and existing bathroom switches, allowing for easier and quicker installation due to common screw holes. Domus PTC Bathroom Heaters feature an advanced safety feature where the unit will automatically shut off after two hours in case it is left on accidentally. If the unit runs for two hours continuously, a safety function will automatically turn it off. This setting can be overridden and reset by pressing any switch on the controller within this two-hour period.

Ideal for new and existing installations with a slimline 615x315mm fascia frame, and a 595x280mm cutout. Accessories include 5-Gang Rocker Bakelite Wall Switch, 3M Flexible Duct, and Exterior Grille. All Domus PTC Bathroom Heaters are backed by our 5 Year In-Home Warranty.



Lighting Up Your World

4-In-1 Slimline Bathroom Heater Unit

- Features PTC Heating – Dual heating settings
- 500m³/h High Volume Extraction Fan to remove moisture and steam
- Circulating Fan setting blows air to help air movement to reduce warm temperature buildup
- 25W LED Tri-Colour Switchable Light
- Twin AC Motors
- 2250W Max Power Consumption
- Available in Black and White
- Includes 5-Gang Rocker Bakelite Wall Switch, 3M Flexible Ducting and exterior grille
- 595 x280mm cut-out

Specification Features

Input Voltage:	240VAC
Power (W):	2250W
Motor Wattage (W)	60W AC
Fan Size:	60W
Air Extraction:	500m ³ /h
Heat Wattage:	2150W
Heat Type:	PTC Heating Element
Light Wattage:	25W LED
IP rating (IP):	IPX2
Decibel Rating (dB):	≤48dB
CCT:	3000K - 4000K - 5000K (Changeable)
CRI:	≥80
Cutout:	595x280mm
Fascia Size:	615x315mm
Duct Size:	150mm

Accessories: 5-Gang Wall Switch, 3M Flexible Duct, Exterior Grille

Lumen Output

3000K	4000K	5000K
1800lm	2100lm	1900lm

Item No.	Varlants	
	Wht	Blk
TROPIX	56017	56018



5 Gang Rocker Bakelite Wall Switch


Retrofit Range 4 in 1

The ORBIS 4-In-1 Retrofit Line Bathroom Heater offers an ultra-modern circular appearance, designed to replace previously installed 3-In-1 Infrared bathroom heater models. Suitable for most contemporary bathroom designs, combined with the latest technology in PTC bathroom heater models. Retrofit Line range offers 4-In-1 Functions – Heater, Exhaust Fan, Circulating Fan, and Light Unit. Patented Heat Breeze Technology heats the room while offering low level extraction to help reduce condensation build up in the bathroom.

This Retrofit Line model features a single AC Motor, producing a 2150W output of powerful heat breeze, high volume extraction at 300m³/h, circulating fan to reduce warm temperature build up, and a 12W LED Tri-Colour switchable light. Complete with Digital Wall Controller, allowing easy switching from all modes, and an ALL-OFF button for exiting. Ideal for retrofit installations, where no extra switch wires are required, simply utilising two cores from the 5-core wiring that is existing from previous installation.

Domus PTC Bathroom Heaters feature an advanced safety feature where the unit will automatically shut off after two hours in case it is left on accidentally. If the unit runs for two hours continuously, a safety function will automatically turn it off. This setting can be overridden and reset by pressing any switch on the controller within this two-hour period. Ideal for new and existing installations with a larger 390x390mm fascia frame, and a cutout size of 330x350mm, which will cover most existing 2 and 4 Heat Infrared Bathroom Heater models. Accessories include Digital Controller Wall Controller, 3M Flexible Duct, and Exterior Grille.

All Domus PTC Bathroom Heaters are backed by our 5 Year In-Home Warranty.

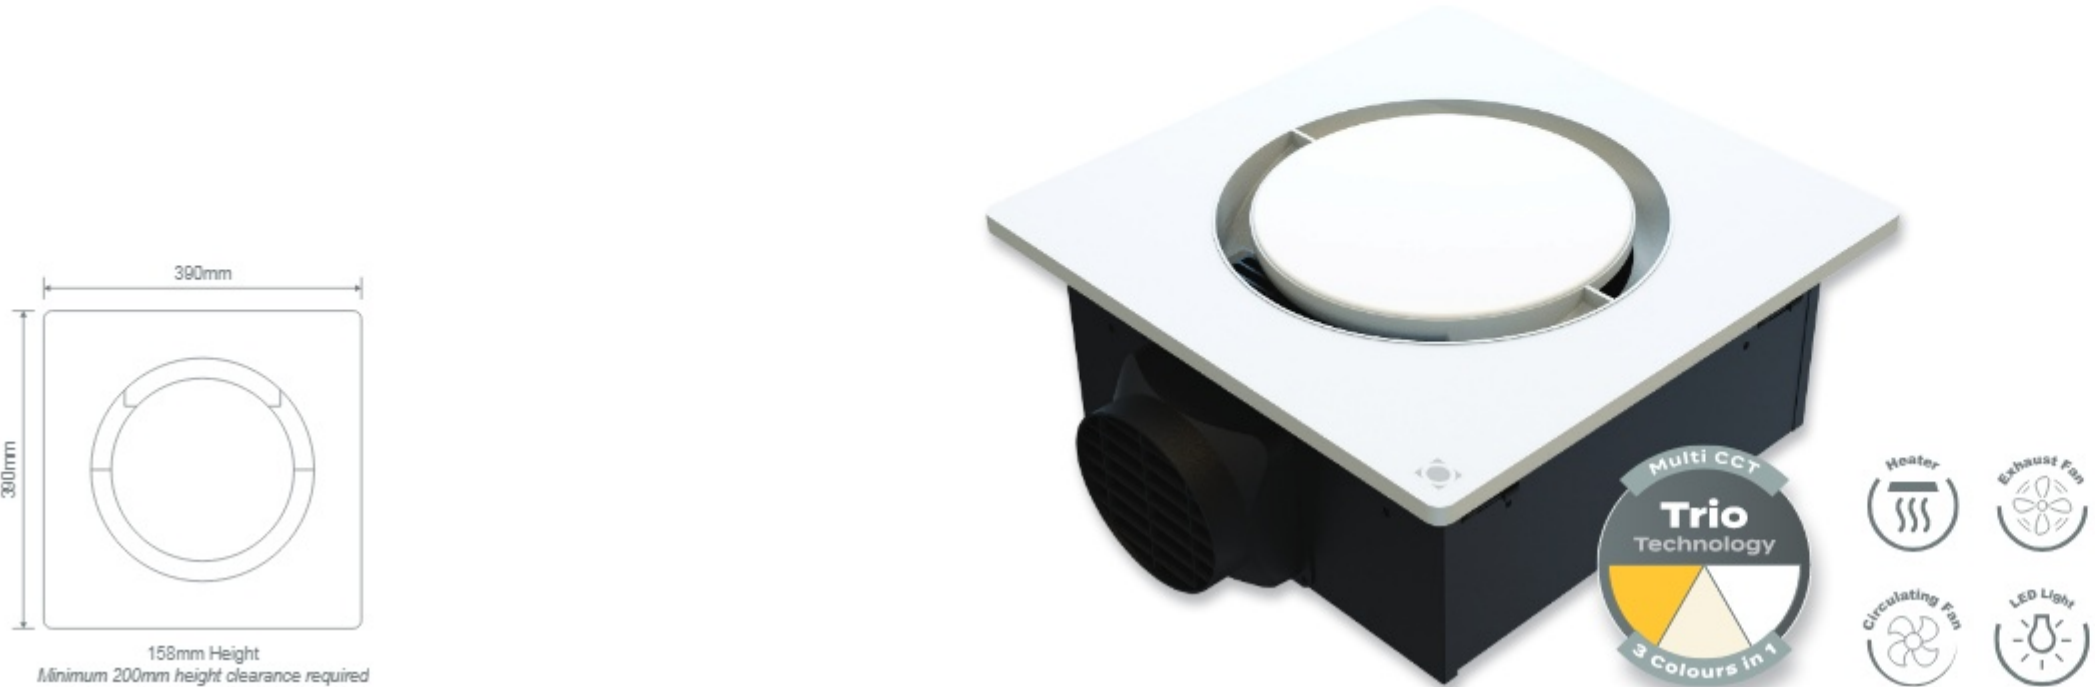

4-In-1 Slimline Bathroom Heater Unit

- Features PTC Heating – Dual heating settings
- 300m³/h High Volume Extraction Fan to remove moisture and steam
- Circulating Fan setting blows air to help air movement to reduce warm temperature buildup
- 12W LED Tri-Colour Switchable Light
- Single AC Motor
- 2250W Max Power Consumption
- Available in White
- Includes Digital Controller Wall Switch, 3M Flexible Ducting and exterior grille
- 330x350mm cut-out to cover most existing 2&4 Heat Infrared Models

Specification Features

Input Voltage:	240VAC
Power (W):	2250W
Motor Wattage (W)	60W AC
Fan Size:	60W
Air Extraction:	300m ³ /h
Heat Wattage:	2150W
Heat Type:	PTC Heating Element
Light Wattage:	12W LED
IP rating (IP):	IPX2
Decibel Rating (dB):	≤46dB
CCT:	3000K - 4000K - 5000K (Changeable)
CRI:	≥80
Cutout:	330x350mm
Fascia Size:	390x390mm
Duct Size:	100mm

Accessories: 6-Switch Digital Wall Controller, 3M Flexible Duct, Exterior Grille

Lumen Output		
3000K	4000K	5000K
1000lm	1150lm	1100lm

Item No.	Variant
ORBIS	Wht 56021



Wall Controller (Included)



Horizontal Switchplate Accessory (Included)



Coloured Vertical Switchplate Covers (Sold Separately)

Heatcore - 4 in 1 Retrofit Bathroom Heater





Retrofit Range 4 in 1

The HEATCORE 4-In-1 Retrofit Line Bathroom Heater offers a modern flush-like appearance, designed to replace previously installed 3-In-1 Infrared bathroom heater models. Suitable for most contemporary bathroom designs, combined with the latest technology in PTC bathroom heater models. Retrofit Line range offers 4-In-1 Functions – Heater, Exhaust Fan, Circulating Fan, and Light Unit. Patented Heat Breeze Technology heats the room while offering low level extraction to help reduce condensation build up in the bathroom. This Retrofit Line model features a single AC Motor, producing a 2150W output of powerful heat breeze, high volume extraction at 300m³/h, circulating fan to reduce warm temperature build up, and a 12W LED Tri-Colour switchable light. Complete with Digital Wall Controller, allowing easy switching from all modes, and an ALL-OFF button for exiting. Ideal for retrofit installations, where no extra switch wires are required, simply utilising two cores from the 5-core wiring that is existing from previous installation.

Domus PTC Bathroom Heaters feature an advanced safety feature where the unit will automatically shut off after two hours in case it is left on accidentally. If the unit runs for two hours continuously, a safety function will automatically turn it off. This setting can be overridden and reset by pressing any switch on the controller within this two-hour period. Ideal for new and existing installations with a larger 390x390mm fascia frame, and a cutout size of 330x350mm, which will cover most existing 2 and 4 Heat Infrared Bathroom Heater models. Accessories include Digital Controller Wall Controller, 3M Flexible Duct, and Exterior Grille.

All Domus PTC Bathroom Heaters are backed by our 5 Year In-Home Warranty.

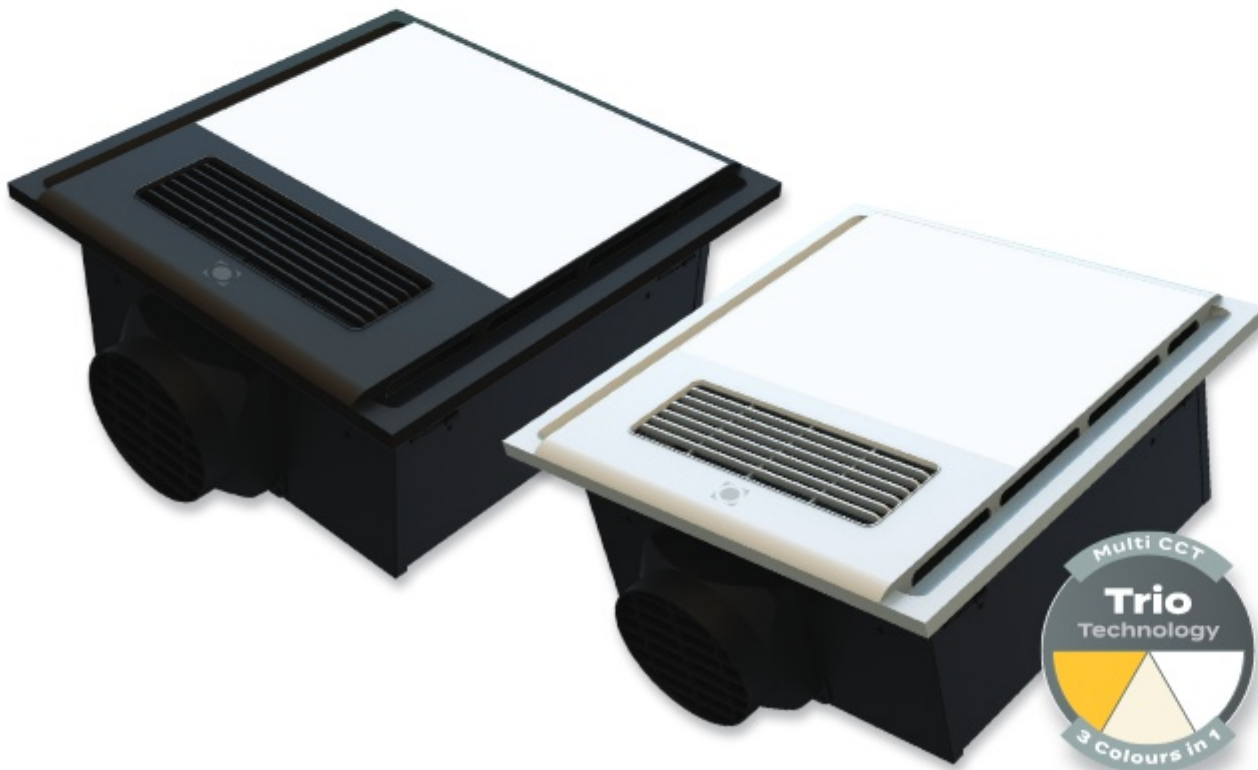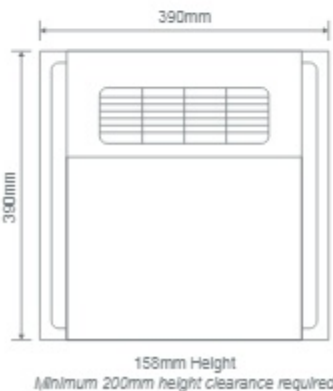

Lighting Up Your World

4-In-1 Slimline Bathroom Heater Unit

- Features PTC Heating – Dual heating settings
- 300m³/h High Volume Extraction Fan to remove moisture and steam
- Circulating Fan setting blows air to help air movement to reduce warm temperature buildup
- 12W LED Tri-Colour Switchable Light
- Single AC Motor
- 2250W Max Power Consumption
- Available in Black and White
- Includes Digital Controller Wall Switch, 3M Flexible Ducting and exterior grille
- 330x350mm cut-out to cover most existing 2&4 Heat Infrared Models

Specification Features

Input Voltage:	240VAC
Power (W):	2250W
Motor Wattage (W)	60WAC
Fan Size:	60W
Air Extraction:	300m ³ /h
Heat Wattage:	2150W
Heat Type:	PTC Heating Element
Light Wattage:	12W LED
IP rating (IP):	IPX2
Decibel Rating (dB):	≤46dB
CCT:	3000K - 4000K - 5000K (Changeable)
CRI:	≥80
Cutout:	330x350mm
Fascia Size:	390x390mm
Duct Size:	100mm

Accessories: 6-Switch Digital Wall Controller, 3M Flexible Duct, Exterior Grille

Lumen Output

3000K	4000K	5000K
850lm	950lm	900lm

Item No.	Variants	
	Wht	Blk
HEATCORE	56024	56025

domuslighting.com.au



Wall Controller (Included)



Horizontal Switchplate Accessory (Included)



Coloured Vertical Switchplate Covers (Sold Separately)

Wall Controllers



Premium Line Controller Functions - Infinity

Light: Press to switch light on and off: (not controlled by standby). The indicator switch button light will remain on until pressed to switch off.

Exhaust Fan: Press to activate air extraction mode. The mode indicator light will appear blue, the indicator switch button light will remain on. (Note: automatically switches off in 2 hours) To switch off the air extraction mode, press again and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Air Circulation: Press to activate air circulation mode. The mode indicator light will appear green, the indicator switch button light will remain on. (Note: automatically switches off in 2 hours) To switch off the air circulation mode, press again and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Heat I: Press to activate Heat I mode. This mode is a low heat mode. The mode indicator light will appear red, the indicator switch button light will remain on. (Note: automatically switches off in 2 hours) To switch off the Heat I mode, press the HEAT I button and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Heat II: Press to activate Heat II mode. This mode is a high heat mode. The mode indicator light will appear red, the indicator switch button light will remain on. (Note: automatically switches off in 2 hours) To switch off the Heat II mode, press the HEAT II button and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Vent: Press to activate Vent mode, this mode will run the exhaust fan at 50% capacity for 10 minutes every hour. This cycle will repeat continuously until the switch button has been turned off. This mode is ideal for removing odours and mould buildup. To switch off the Vent mode, press the button again and the indicator light on the switch button will also be off.

Dry: Pressing once will activate the air circulation fan and sets the heater to the second level. The display shows the room temperature as "88". The mode indicator light turns orange. The power button indicator remains on. After 25 minutes, the heater turns off (the air circulation fan continues for an additional 30 seconds before shutting down). Then, a 5-minute exhaust fan ventilation cycle begins. This entire process repeats every 30 minutes, for a total of four cycles. Pressing twice will deactivate the air circulating fan, exhaust fan ventilation, and heater. The air circulation fan continues for an additional 30 seconds before shutting down. The mode indicator light and switch button light will turn off.

It is recommended to use the drying function to quickly remove moisture and vaporise condensation after using the shower when there is a large amount of steam and water droplets on the bathroom walls. This will help restore a dry bathroom environment as soon as possible and reduce the growth of bacteria and mould.

Standby: Press to turn off all functions except light and Vent mode (when heating is on, the circulating fan will remain on for 30 seconds) and the indicator light of the switch button will be on.

Please note that the HEAT mode will only work in conjunction with the air circulation mode, and will not work while the extraction mode is in use.



Lighting Up Your World

Premium Line Controller Functions - Airsway

Light: Press to switch light on and off: (not controlled by standby). The indicator switch button light will remain on until pressed to switch off.

Exhaust Fan: Press to activate air extraction mode. The mode indicator light will appear blue, the indicator switch button light will remain on. (Note: automatically switches off in 2 hours) To switch off the air extraction mode, press again and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Air Circulation: Press to activate air circulation mode. The mode indicator light will appear green, the indicator switch button light will remain on. (Note: automatically switches off in 2 hours) To switch off the air circulation mode, press again and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Heat I: Press to activate Heat I mode. This mode is a low heat mode. The mode indicator light will appear red, the indicator switch button light will remain on. (Note: automatically switches off in 2 hours) To switch off the Heat I mode, press the HEAT I button and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Heat II: Press to activate Heat II mode. This mode is a high heat mode. The mode indicator light will appear red, the indicator switch button light will remain on. (Note: automatically switches off in 2 hours) To switch off the Heat II mode, press the HEAT II button and the mode indicator light will turn off, and the indicator light on the switch button will also be off.


Sway: Press to activate Sway mode (for AIRSWAY only). This mode activates the oscillating sway outlet. (Note: automatically switches off in 2 hours) To switch off the sway mode, press the button again and the indicator light on the switch button will also be off.

Dry: Pressing once will activate the air circulation fan and sets the heater to the second level. The display shows the room temperature as "88". The mode indicator light turns orange. The power button indicator remains on. After 25 minutes, the heater turns off (the air circulation fan continues for an additional 30 seconds before shutting down). Then, a 5-minute exhaust fan ventilation cycle begins. This entire process repeats every 30 minutes, for a total of four cycles. Pressing twice will deactivate the air circulating fan, exhaust fan ventilation, and heater. The air circulation fan continues for an additional 30 seconds before shutting down. The mode indicator light and switch button light will turn off.

It is recommended to use the drying function to quickly remove moisture and vaporise condensation after using the shower when there is a large amount of steam and water droplets on the bathroom walls. This will help restore a dry bathroom environment as soon as possible and reduce the growth of bacteria and mould.

Standby: Press to turn off all functions except light (when heating is on, the circulating fan will remain on for 30 seconds) and the indicator light of the switch button will be on.

Please note that the HEAT mode will only work in conjunction with the air circulation mode, and will not work while the extraction mode is in use.

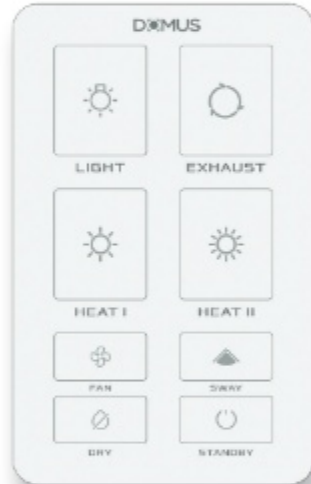

Retrofit Line Controller Functions - Orbs & Heatcore

Light: Press to switch light on and off: (not controlled by standby). The indicator switch button light will remain on until pressed to switch off.

Exhaust Fan: Press to active air extraction mode. The mode indicator light will appear green, the indicator switch button light will remain on.
(Note: automatically switches off in 2 hours) To switch off the air extraction mode, press again and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Air Circulation: Press to active air circulation mode. The mode indicator light will appear green, the indicator switch button light will remain on.
(Note: automatically switches off in 2 hours) To switch off the air circulation mode, press again and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Heat I: Press to active Heat I mode. This mode is a low heat mode. The mode indicator light will appear red, the indicator switch button light will remain on.
(Note: automatically switches off in 2 hours) To switch off the Heat I mode, press the HEAT I button and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Heat II: Press to active Heat II mode. This mode is a high heat mode. The mode indicator light will appear red, the indicator switch button light will remain on.
(Note: automatically switches off in 2 hours) To switch off the Heat II mode, press the HEAT II button and the mode indicator light will turn off, and the indicator light on the switch button will also be off.

Standby: Press to turn off all functions except light (when heating is on, the circulating fan will remain on for 30 seconds) and the indicator light of the switch button will be on.

Please note that the HEAT mode will only work in conjunction with the air circulation mode, and will not work while the extraction mode is in use.





domuslighting.com.au
1300 236 687