Product datasheet

Specifications

II CLIPSAL



Cord Extension Socket, Clipsal - 56 Series, 3 Flat PIN, 250V, 10A

56CSC310-EO

Main

Range of product	Series 56
Range	Clipsal - 56 Series
Product brand	Clipsal
Product or component type	Socket
Device application	Power supply
Colour	Orange (RAL 2004)

Complementary

Complementary	
Plug, socket category	Low voltage
Plug, socket, control station shape	Straight
Mounting mode	External mounting
[In] rated current	10 A
[Ue] rated operational voltage	250 V AC 50 Hz conforming to EN 60309-2
Poles description	1P + N + E
Voltage colour	Blue
Duration	6 h
Material	Polycarbonate: housing
Contacts material	Sleeves: brass
Connections - terminals	Screw terminals 0.751.5 mm ²
Connections - terminals	Screw terminal
Socket number	1
Socket-outlet type	A
Outlet standard	Industrial
Cable outer diameter	716 mm
Cable entry	Cable gland
Thread type	M20
Net weight	0.139 kg
Depth	120 mm
Length	105 mm
width	85 mm
Height	85 mm

Targeted country

Australia

Environment


IP degree of protection	IP66 conforming to AS 60529
Ambient air temperature for operation	-2575 °C
Standards	AS/NZS 3120

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.5 cm
Package 1 Width	6.3 cm
Package 1 Length	10.7 cm
Package 1 Weight	118 g

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

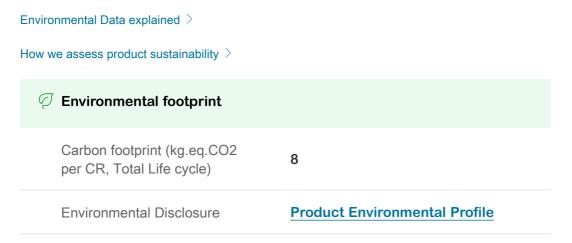

Use Better

S Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Νο
EU RoHS Directive	Compliant with Exemptions
China RoHS Regulation	China RoHS declaration

Use Again

\bigcirc Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	Νο