

AQUA IP66 V2 CEILING FAN



Matt Black with Matt Black Blade

Installation Locations:

Coastal, indoor and outdoor locations. The fan is also suitable for installation in a pergola or outside in a sheltered area, protected from wind.
IP66 certified - Dust proof & protected against water projected from high pressure jets.

Recommended Height:

There should be at least 2.1m between the lowest point of the fan blades and the floor.

Motor:

156mm x 10mm DC motor
Made with high grade copper windings and silicone steel stator.
Bearings are sealed and waterproof to ensure quiet operation and long life.

Top Canopy & Downrod:

Materials: ABS Polymer & Aluminium

Product Range:

- AIP2661 - White with White Blades
- AIP2662 - Matt Black with Matt Black Blades
- AIP2663 - Matt Black with Koa Blades

Blades:

Sizes: 1320mm (52")
Materials: ABS Polymer & UV stabilised
Blade Pitch: 11°

Extra Information:

Introduced into the HPI range in 2022
9 Speed remote controller
Reversible

Airflow CMH:

14,286 on High speed (Speed 9)

Warranty:

2 years in-home warranty on all electric components (control modules, remote control system, lighting and accessory wall control)
3 years standard "in home" warranty
3 years extended warranty on motor only (excluding labour)

Standard Canopy Cover:

Suitable for flat ceiling

Weight Including Packaging:

Complete fan: 6.6kg

Packaging Dimensions (cm):

Complete Fan: 69L x 30W x 27H

Accessories (Supplied separately):

Down Rod 26mm diameter (includes wire harness)

- DC2460 - 91cm White Downrod
- DC2461 - 91cm Black Downrod
- DC2467 - 180cm White Downrod
- DC2468 - 180cm Black Downrod

38° Ceiling Kit* (for pitched ceilings)

- 080 - Ceiling Kit White 38°
- 082 - Ceiling Kit Painted Silver 38°
- 083 - Ceiling Kit Black 38°

009 - T-Hook for ceiling roses

DCWC240 - 240V DC Wall Controller

WIFIM099 - Smart WiFi Module


PIXIEM098 - Pixie HPI Ceiling Fan Module

* If using accessory 38° Ceiling Kit, this fan is no longer IP66 rated.

* For full warranty details please see Hunter Pacific International's website www.hunterpacific.com.au

	Speed 1	Speed 2	Speed 3	Speed 4	Speed 5	Speed 6	Speed 7	Speed 8	Speed 9
RPMS	73	95	139	144	160	169	184	192	200
WATTS	3.4	4.6	8.2	9.6	11.8	13.6	15.3	17.9	19.5

Dimensions

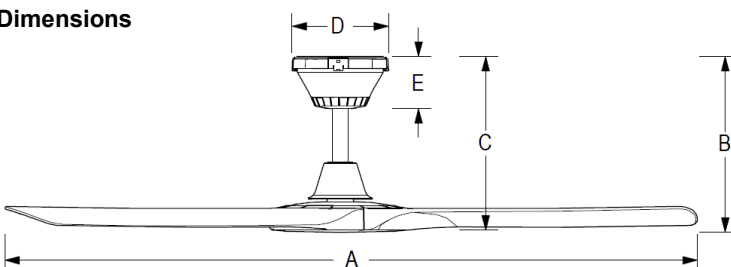

A	B	C	D	E
1520mm	290mm	290mm	160mm	86mm