

Original MC4 with open crimp contacts

Renewable Energy | Solar Photovoltaics

EN



MC4 connector

Insulating part and crimp contact

MC4 socket



PV-KBT4...

MC4 plug



PV-KST4...


- In accordance with NEC 2023, requires a tool to open.
- Proven MULTILAM contact technology with high long-term stability, which ensures consistently low performance loss throughout the entire service life of the connector.
- Approved for DC 1100 V (IEC)¹⁾ and DC 1500 V (UL).
- Tried and tested connectors, over 30 years of experience in the field.
- Available for assembly with cross-sections up to 10 mm².
- Also available as ready made leads according to customer's specification.
- To be used with suitable mated connectors from the MC4 product family and suitable cable.
- MC4 and MC4-Evo are registered trademarks owned by Stäubli.

Technical data	
Ambient temperature range	-40 °C...+85 °C (TÜV/UL)
Upper limiting temperature	105 °C
Degree of protection, mated	IP65/IP68 (1 m, 1 h)
Degree of protection, unmated	IP2X
Degree of pollution	3
Max. contact resistance of the connector	< 0.25 mΩ
Rated impulse withstand voltage	16 kV
Contact system	MULTILAM
Type of connection	Crimping
Contact material	Copper, tin plated
Insulation material	PC/PA
Locking system	Locking Type
Flammability class	UL94:V-0
Ammonia resistance	Acc. to DLG
Ammonia resistance tested in accordance with	2 PfG 1911/04.16
Salt mist spray test	Degree of severity 6
Max. number of mating cycles	100
TÜV Rheinland certification number	R 60127190
TÜV Rheinland 2 PfG 2330	R 60087448
UL-File number (UL6703 and CSA C22.2 No. 182.5) (cULus Listed and UL Recognized)	E343181
JET number of certificate	B19T0013


¹⁾ The IEC voltage expansion for MC4 connectors up to DC 1100 V applies to 2.5 mm², 4.0 mm² and 6.0 mm² cable cross sections used in the end application. However, the 10 mm² cross-section remains at DC 1000 V.

Dimensional drawings

MC4 socket

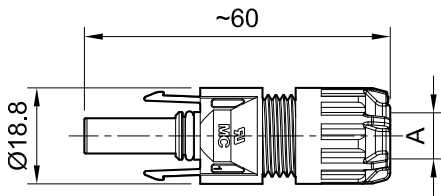


PV-KBT4...




Dimensions in mm

MC4 plug

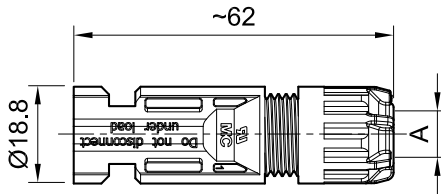

PV-KST4...



Ordering information

Order No.	Type	Socket	Plug	Outer diameter of PV wire	Width of crimp opening	IEC 62852			UL 6703			Approvals				
						mm ²	DC V	A	AWG	DC V	A	TÜV	cULus	UR	CQC	JET
32.0010P0001-URFL	PV-KBT4/2,5I-UR	x		5.0 – 6.0	4.0	2.5	1100	22.5				x	x	x		x
									14	1500	30					
32.0011P0001-URFL	PV-KST4/2,5I-UR		x	5.0 – 6.0	4.0	2.5	1100	22.5				x	x	x		x
									14	1500	30					
32.0140P0001-URFL	PV-KBT4/2,5X-UR	x		5.5 – 7.4	4.0	2.5	1100	22.5				x	x	x		x
									14	1500	30					
32.0141P0001-URFL	PV-KST4/2,5X-UR		x	5.5 – 7.4	4.0	2.5	1100	22.5				x	x	x		x
									14	1500	30					
32.0012P0001-URFL	PV-KBT4/2,5II-UR	x		7.0 – 8.8	4.0	2.5	1100	22.5				x	x	x	x	x
									14	1500	30					
32.0013P0001-URFL	PV-KST4/2,5II-UR		x	7.0 – 8.8	4.0	2.5	1100	22.5				x	x	x	x	x
									14	1500	30					
32.0014P0001-URFL	PV-KBT4/6I-UR	x		5.0 – 6.0	5.8	4	1100	39				x	x	x		x
						6	1100	39								
									12	1500	35					
									10	1500	50					
32.0015P0001-URFL	PV-KST4/6I-UR		x	5.0 – 6.0	5.8	4	1100	39				x	x	x		x
						6	1100	39								
									12	1500	35					
									10	1500	50					
32.0142P0001-URFL	PV-KBT4/6X-UR	x		5.5 – 7.4	5.8	4	1100	39				x	x	x		x
						6	1100	39								
									12	1500	35					
									10	1500	50					
32.0143P0001-URFL	PV-KST4/6X-UR		x	5.5 – 7.4	5.8	4	1100	39				x	x	x		x
						6	1100	39								
									12	1500	35					
									10	1500	50					
32.0016P0001-URFL	PV-KBT4/6II-UR	x		7.0 – 8.8	5.8	4	1100	39				x	x	x	x	x
						6	1100	39								
									12	1500	35					
									10	1500	50					

Order No.	Type	Socket	Plug	Outer diameter of PV wire	Width of crimp opening	IEC 62852			UL 6703			Approvals				
						mm ²	DC V	A	AWG	DC V	A	TÜV	cULus	UR	CQC	JET
32.0017P0001-URFL	PV-KST4/6II-UR		x	7.0 – 8.8	5.8	4	1100	39				x	x	x	x	x
						6	1100	39								
									12	1500	35					
								10	1500	50						
32.0034P0001FL	PV-KBT4/10II	x		7.0 – 8.8	6.5	10	1000	45				x				x
32.0035P0001FL	PV-KST4/10II		x	7.0 – 8.8	6.5	10	1000	45				x				x

Note:

For more detailed information concerning suitable cable glands, please consult the corresponding assembly instructions.

Note:

Unmated connectors must be protected from any contamination using Stäubli protective caps. For ordering information concerning Stäubli protective caps, please consult the catalog “Tools and accessories”.

Further information



MC4 connectors with barrel crimp contacts

For connectors with barrel crimp contacts, please consult:
www.staubli.com/re-downloads.html → English → Catalog → **MC4 connectors with barrel crimp contacts**



Tools and accessories

For related Stäubli tools and accessories please consult:
www.staubli.com/re-downloads.html → English → Catalog → **Tools and accessories**



Assembly instructions

For assembly instructions for “MC4 connector” please consult:
www.staubli.com/re-downloads.html → English → Assembly info → **MA728**