

PROGRAMMABLE WEATHERPROOF LIGHT SENSITIVE SWITCH (PE170R2)

Effectively control outdoor lighting with defined 'off times'




Unlike conventional light sensitive switches that work on a time delay from sunset, the new **programmable** light sensitive switch from HPM enables you to set a defined off time for your outdoor lighting that remains consistent all year, regardless of seasonal changes in sunrise/ sunset times.

This is important as the variation in sunrise and sunset times in summer and winter lead to off time inconsistencies, an undesirable outcome.

Program your preferred off time and adjust the lux levels using a simple dial setting, and that's it. And if there is power loss the non-volatile memory ensures the program is restored.

PROGRAMMABLE **WEATHERPROOF** LIGHT SENSITIVE **SWITCH**


The innovative built-in algorithm enables a defined off time consistent all year round.

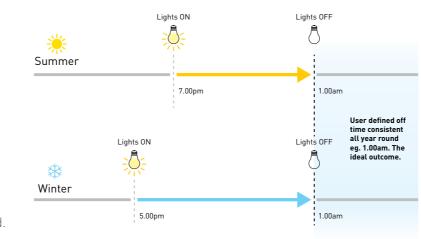

DISCOVER THE DIFFERENCE!

CONVENTIONAL TIME DELAY LIGHT SENSITIVE SWITCHES

As the sunset time changes with the seasons, the turn off time changes as well. This inconsistency is undesirable in many applications.

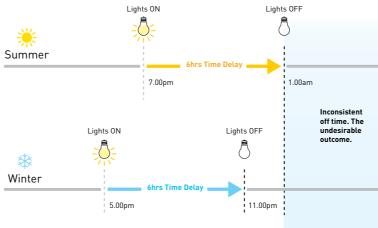

SPECIFICATIONS	
Cat no.	PE170R2
Weatherproof rating	IP56
Maximum load	2400W Incandescent 2400W Halogen 1000VA Compact fluorescent 1000W LED
Connection type	3 wire
Operation	Turns lights on at sunset and turns lights off at user-specified time*
Contacts	Normally open
Off time adjustment	From 9pm to 4am in increments of 30 minutes or dawn (natural light dependent)
Colour	Grey base with opalescent cover
Supply voltage	230 - 240V a.c. ± 6%
Frequency	50 Hz
Minimum load	5W
Stand-by power consumption Vin	<1W
Operating temperature	0° to 50°C
Unit size	83 W × 83 H × 56 D mm
Mounting	Surface mount Retrofitable to old PE170 base

*This does not take into account daylight saving time change.

FEATURES

- User defined off time, maintained all year round
- Adjustable LUX setting (for on time)
- Non-volatile memory ensures program is restored in case of power loss
- Simple dial adjustment for easy programming
- Retrofitable to old PE170 switch base Suitable for all loads
- Multiple side and back cable entries 25mm Ø for easy wiring
- Easy to install



This iconic HPM Weatherproof Light Sensitive Switch has been upgraded featuring a number of improvements including better screw terminal connectors, a larger internal cavity for cable management and better cover design.

WEATHERPROOF LIGHT

SENSITIVE SWITCH (PE170/10)


Simply install and forget.

The perfect solution for those applications needing lights turned on from sunset to sunrise all year round.



SPECIFICATIONS	
Cat no.	PE170/10
Weatherproof rating	IP56
Maximum load	2400W Incandescent 2400W Halogen 1000VA Compact fluorescent 1000W LED
Connection type	3 wire
Operation	Turn lights on from sunset to sunrise
Contacts	Normally open
Colour	Grey base with opalescent cover
Supply voltage	230 - 240V a.c. ± 6%
Frequency	50 Hz
Minimum load	5W
Stand-by power consumption V _{in}	<1W
Operating temperature	0° to 50°C
Unit size	83 W × 83 H × 56 D mm
Mounting	Surface mount Retrofitable to old PE170 base

- No programming required
- Automatic Sunset to Sunrise operation
- Retrofitable to old PE170 surface mount boxes
- Suitable for all loads
- Multiple side and back cable entries 25mm Ø for easy wiring
- Easy to install

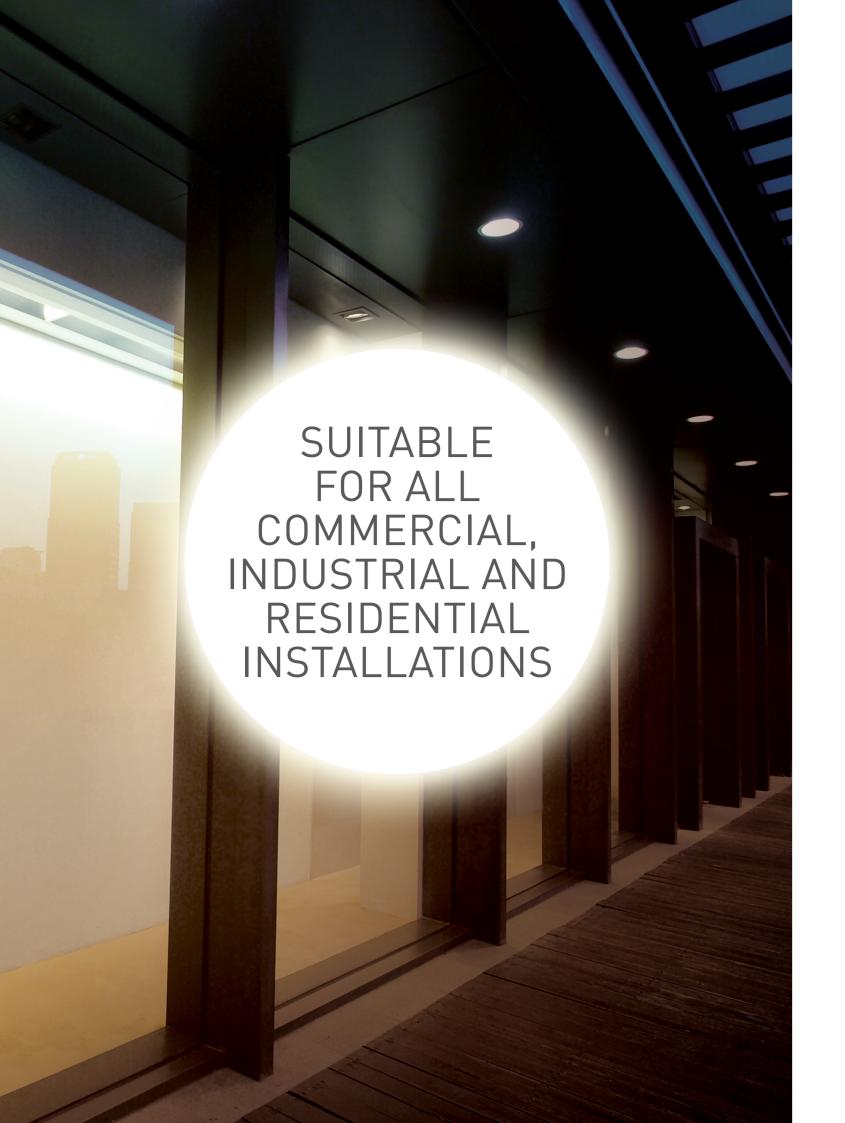





WEATHERPROOF LIGHT SENSITIVE SWITCHES



Legrand Australia

Building 4 Nexus Industry Park 43-47 Lyn Pde Prestons NSW 2170 1300 369 777 www.hpm.com.au

Legrand New Zealand

106-124 Target Road Glenfield Auckland 0627 New Zealand 0800 476 009 www.hpm.co.nz