

ROBUS®

FLEXI-STRIPS

VEGAS COB KIT

2m 17w 5m 41w



Product is certified to all the relevant standards.
Please contact our technical department for market specific compliances.





PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Flexible Chip-on-Board (COB) LED with 3M adhesive tape
- Plug top AC power supply with 1.2m cable
- Comes with 2m or 5m reels

FEATURES

- COB technology providing smooth, continuous light effect
- Power consumption of 7.7W/lm
- Can be cut every 45mm to match any installation
- IP20 suitable for indoor applications only
- Complete plug and play set, with 24v Driver
- 2m extension cable available as accessory (R2MEC)
- Can be turned into dimmable, programmable kit using R5MCCT1-WIFI controller and controlled via ROBUS CONNECT app



	Per Metre	R2MCOBSIK-30 R2MCOBSIK-40	R5MCOBSIK-30 R5MCOBSIK-40
3000K 4000K			
Comparable to:	NA	NA	NA
Total Power (W/m):	7.7/7.8	17.4/ 17.3	41.0/ 41.1
Power Factor:	NA	0.55	0.55
Total Light Output (lm):	750/860	1550/ 1700	3590/ 3900
Efficacy (lm/cctW):	97/110	89/ 98	88/ 95
Lux at 1m (lux):	190/220	190/220	190/220
CCT (K):	3000/ 4000	3000/ 4000	3000/ 4000
CRI:	80	80	80
IP:	20	20	20
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
RG Value:	0	0	0
Dimensions (mm): LxWxH	1000x10x2	2000x10x2	5000x10x2
Weight (kg):	0.1	0.21	0.35

Accessories:

- R2MEC 2m Extension Cable With Barrel Jacks
- R5MCCT1-WIFI VEGAS CONNECT 96W Wi-Fi controller, IP20, single colour

R5MCCT1-WIFI

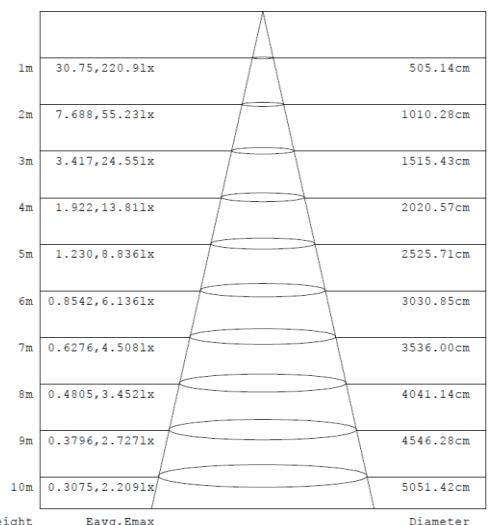
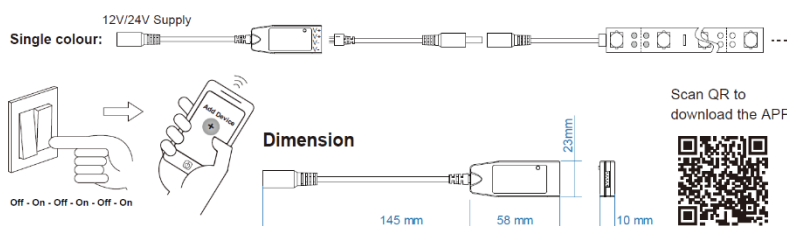


Diagram for R5MCOBSIK-40. Other diagrams available on request

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA